

# New International Skeleton Tables for the Thermodynamic Properties of Ordinary Water Substance

Cite as: Journal of Physical and Chemical Reference Data **17**, 1439 (1988); <https://doi.org/10.1063/1.555812>  
Submitted: 29 December 1986 . Published Online: 15 October 2009

H. Sato, M. Uematsu, K. Watanabe, A. Saul, and W. Wagner



View Online



Export Citation

## ARTICLES YOU MAY BE INTERESTED IN

[The IAPWS Formulation 1995 for the Thermodynamic Properties of Ordinary Water Substance for General and Scientific Use](#)

Journal of Physical and Chemical Reference Data **31**, 387 (2002); <https://doi.org/10.1063/1.1461829>

[International Equations for the Saturation Properties of Ordinary Water Substance](#)

Journal of Physical and Chemical Reference Data **16**, 893 (1987); <https://doi.org/10.1063/1.555787>

[International Equations for the Saturation Properties of Ordinary Water Substance. Revised According to the International Temperature Scale of 1990. Addendum to J. Phys. Chem. Ref. Data 16, 893 \(1987\)](#)

Journal of Physical and Chemical Reference Data **22**, 783 (1993); <https://doi.org/10.1063/1.555926>

Where in the **world** is AIP Publishing?  
*Find out where we are exhibiting next*



# New International Skeleton Tables for the Thermodynamic Properties of Ordinary Water Substance<sup>a)</sup>

H. Sato, M. Uematsu, and K. Watanabe

Department of Mechanical Engineering, Faculty of Science and Technology, Keio University, 3-14-1 Hiyoshi, Kohoku-ku, Yokohama 223, Japan

A. Saul and W. Wagner

Institut für Thermo-und Fluidodynamik, Ruhr-Universität Bochum, 4630 Bochum 1, Federal Republic of Germany

Received December 29, 1986; revised manuscript received February 23, 1988

The current knowledge of thermodynamic properties of ordinary water substance is summarized in a condensed form of a set of skeleton steam tables, where the most probable values with the reliabilities on specific volume and enthalpy are provided in the range of temperatures from 273 to 1073 K and pressures from 101.325 kPa to 1 GPa and at the saturation state from the triple point to the critical point. These tables have been accepted as the IAPS Skeleton Tables 1985 for the Thermodynamic Properties of Ordinary Water Substance (IST-85) by the International Association for the Properties of Steam (IAPS). The former International Skeleton Steam Tables, October 1963 (IST-63), have been withdrawn by IAPS. About 17 000 experimental thermodynamic data were assessed and classified previously by Working Group 1 of IAPS. About 10 000 experimental data were collected and evaluated in detail and especially about 7000 specific-volume data among them were critically analyzed with respect to their errors using the statistical method originally developed at Keio University by the first three authors. As a result, specific-volume and enthalpy values with associated reliabilities were determined at 1455 grid points of 24 isotherms and 61 isobars in the single-fluid phase state and at 54 temperatures along the saturation curve. The background, analytical procedure, and reliability of IST-85 as well as the assessment of the existing experimental data and equations of state are also discussed in this paper.

Key words: density; enthalpy; error analysis; IAPS; IST-85; saturated steam; saturated water; specific volume; steam; thermodynamic property; vapor pressure; water.

## Contents

1. Introduction .....	1441	4. Statistical Treatment .....	1452
2. Historical Background .....	1441	4.1. Basic Concept .....	1452
3. Experimental Situation .....	1445	4.2. Error Analysis .....	1453
3.1. Single-Fluid Phase State .....	1445	4.3. Skeleton Tables .....	1453
3.1.a. Specific Volume .....	1445	5. Data Processing .....	1454
3.1.b. Enthalpy .....	1450	5.1. Single-Fluid Phase State .....	1454
3.2. Saturation State .....	1451	5.1.a. Specific Volume .....	1454
3.2.a. Vapor Pressure .....	1451	5.1.b. Enthalpy .....	1455
3.2.b. Specific Volume .....	1452	5.2. Saturation State .....	1455
3.2.c. Enthalpy .....	1452	6. Common Requirements .....	1456
		6.1. Critical Point .....	1456
		6.1.a. Temperature, Pressure, and Density .....	1456
		6.1.b. Enthalpy .....	1456
		6.2. Saturation State .....	1456
		6.2.a. Triple Point .....	1456
		6.2.b. Boiling Point .....	1456
		6.2.c. Clapeyron's Equation .....	1456
		6.3. Single-Fluid Phase State .....	1456

<sup>a)</sup> This is the background report for the IAPS Skeleton Tables 1985 for the Thermodynamic Properties of Ordinary Water Substance issued by the International Association for the Properties of Steam.

©1988 by the U.S. Secretary of Commerce on behalf of the United States. This copyright is assigned to the American Institute of Physics and the American Chemical Society.  
Reprints available from ACS; see Reprints List at back of issue.

6.3.a. Second Virial Coefficient .....	1456
6.3.b. Precise Data at Atmospheric Pressure .....	1456
7. Skeleton Tables .....	1456
8. Comparisons .....	1456
8.1. Single-Fluid Phase State .....	1456
8.1.a. Specific Volume .....	1456
8.1.b. Enthalpy .....	1457
8.2. Saturation State .....	1457
9. Discussions .....	1460
9.1. Tolerance of IST-85 .....	1460
9.2. Discussions of Skeleton Tables and Equations of State .....	1463
9.2.a. IST-63 .....	1463
9.2.b. IFC-67 .....	1464
9.2.c. IAPS-84 .....	1466
9.2.d. Equation Developed by Pollak .....	1468
9.2.e. Equations Developed by Sato <i>et al.</i> .....	1469
10. Conclusion .....	1474
11. Acknowledgments .....	1474
12. References .....	1474
Appendix I. Release on the IAPS Skeleton Tables 1985 for the Thermodynamic Properties of Ordinary Water Substance .....	1476
Appendix II. Comparison of the available specific-volume values of water with the present skeleton table values along the isotherms between 273.15 and 1073.15 K in the pressure range up to 1 GPa .....	1491
Appendix III. Comparison of the available enthalpy values of water with the present skeleton table values along the isotherms between 273.15 and 1073.15 K in the pressure range up to 1 GPa .....	1520

### List of Tables

1. List of Steam Tables .....	1442
2. Historical progress of International Skeleton Tables .....	1445
3. Experimental studies on the specific volume of water .....	1446
4. Experimental studies on the enthalpy of water .....	1450
5. Experimental studies on the vapor pressure of water .....	1451
6. Experimental studies on the specific volume of saturated water .....	1452
7. Experimental studies on the specific volume of saturated steam .....	1452
8. Experimental studies on the caloric property of saturated water and steam .....	1452
9. Discrepancies among derived thermodynamic property values from four equations of state; equation developed by Pollak, IAPS-84, and two equations developed by Sato <i>et al.</i> , along 273 K isotherm .....	1455

### List of Figures

1. Experimental data of the specific volume of water published prior to 1963 on the pressure-temperature plane .....	1448
2. Experimental data of the specific volume of water published after 1964 on the pressure-temperature plane .....	1448
3. Experimental data of the enthalpy on the pressure-temperature plane .....	1451
4. Process for the establishment of the present skeleton tables .....	1454
5. Five subregions for the error analysis of the experimental specific-volume data .....	1454
6. Percent deviations of the vapor pressure values from the equation developed by Wagner and Saul .....	1458
7. Percent deviations of the density values of saturated water from the equation developed by Wagner and Saul .....	1458
8. Percent deviations of the density values of saturated steam from the equation developed by Wagner and Saul .....	1459
9. Percent deviations of the $\Delta\alpha _T^2$ values, $\alpha$ -increments between temperatures $T_1$ and $T_2$ measured by Osborne <i>et al.</i> in 1937 and in 1939 from the equation developed by Wagner and Saul .....	1459
10. Comparison of the derived enthalpy values of saturated water from IAPS-84 and the values of the International Skeleton Steam Tables, 1963, and the associated tolerances with the present skeleton-table values .....	1459
11. Comparison of the derived enthalpy values of saturated steam from IAPS-84 and the values of the International Skeleton Steam Tables, 1963, and the associated tolerances with the present skeleton-table values .....	1460
12. Percent tolerance for the specific volume values of the present skeleton tables .....	1461
13. Percent tolerance for the enthalpy values of the present skeleton tables .....	1462
14. Comparison of IST-63 specific-volume values with the present skeleton-table values .....	1463
15. Comparison of IST-63 enthalpy values with the present skeleton-table values .....	1464
16. Comparison of IFC-67 specific-volume values with the present skeleton-table values .....	1465
17. Comparison of IFC-67 enthalpy values with the present skeleton-table values .....	1465
18. Comparison of IAPS-84 specific-volume values with the present skeleton-table values .....	1466
19. Comparison of IAPS-84 enthalpy values with the present skeleton-table values .....	1467
20. Comparison of the specific-volume values derived from the equation developed by Pollak with the present skeleton-table values .....	1468
21. Comparison of the enthalpy values derived from the equation developed by Pollak with the present skeleton-table values .....	1469

22. Comparison of the specific-volume values derived from the equation developed by Sato <i>et al.</i> (SUWH) with the present skeleton-table values .....	1470
23. Comparison of the enthalpy values derived from the equation developed by Sato <i>et al.</i> (SUWH) with the present skeleton-table values .....	1471
24. Comparison of the specific-volume values derived from the equation developed by Sato <i>et al.</i> (SUWL) with the present skeleton-table values .....	1472
25. Comparison of the enthalpy values derived from the equation developed by Sato <i>et al.</i> (SUWL) with the present skeleton-table values .....	1473

## 1. Introduction

Water<sup>b)</sup> is the most abundant compound on the surface of the earth<sup>1</sup>; thus the knowledge of its thermodynamic properties is essential to understanding the mechanisms of nature. For practical applications, water has been used widely in industries as heating medium, working fluid of power generation, solvent, medium of hydrothermal reactions, and so on. The experimental data regarding the thermodynamic properties of water have been accumulated from the nineteenth century up to the present to form a large body of information. Industries have saved large amounts of energy and improved safety by means of the rational design and operation based on those experimental data.

Approximately 12 000 specific-volume data and 5000 other thermodynamic property data including heat capacity, internal energy, enthalpy, Joule–Thomson coefficient, and speed of sound, were reported for thermodynamic properties of water up to the present. Among them, about 6000 specific volume data and about 2000 other thermodynamic property data were reported after the establishment of the former International Skeleton Steam Tables (IST-63).

Although a large amount of experimental data has been accumulated, the use of them requires much effort even to collect and convert into common units. In addition, the fact that different investigators have often provided different values due to experimental errors for a property at the same state point, may lead users to be confused.

The objective of establishing skeleton tables is to extract the best value from those current experimental data and to provide it. A set of skeleton tables is the current information consisting of the most probable values and the reliabilities (tolerances) extracted from the experimental data by analyzing their errors on the basis of common criteria.

Straub, Scheffler, Rosner, Watanabe, Uematsu, and Sato have emphasized the importance of obtaining international agreement on the thermodynamic data<sup>2</sup>; they proposed skeleton tables for the specific volume of water in

1980.<sup>3,4</sup> Those efforts motivated the International Association for the Properties of Steam (IAPS) to issue the IAPS Skeleton Tables 1985 (IST-85).

The IST-85 consists of three different tables. The first table gives the most probable specific-volume values with their associated tolerances in the range of temperatures from 273.15 to 1073.15 K and pressures up to 1 GPa, the second table gives the most probable enthalpy values with their associated tolerances in the same range as that of the specific-volume table, and the last one gives the thermodynamic properties along the saturation curve.

The original specific-volume and enthalpy tables for the single-fluid phase water were provided by the first three present authors, Sato, Uematsu, and Watanabe.<sup>4-11</sup> The specific-volume table was constructed on the basis of the experimental data by using the method of error analysis developed by Sato, Uematsu, and Watanabe,<sup>4-7</sup> whereas the enthalpy table was constructed from existing equations of state for water as described in Sec. 5.1.b. The table for the saturated water and saturated steam was calculated by the equations established by the last two present authors, Saul and Wagner,<sup>12-14</sup> whose equations have received international agreement to be released as Supplementary Release on Saturation Properties of Ordinary Water Substance.<sup>15</sup>

The present paper aims to provide the detailed background, procedure and assessment of IST-85, as well as the values of IST-85 and comparisons of the values of IST-85 with most of experimental data on specific volume and enthalpy of water, and with IST-63, existing equations of state including currently internationally agreed upon equations, the 1967 IFC Formulation for Industrial Use (IFC-67) and the IAPS Formulation 1984 for Scientific and General Use (IAPS-84).

## 2. Historical Background

In 1929, the First International Steam Table Conference was held in London in order to establish the International Skeleton Steam Tables for the purpose of providing the unified thermodynamic property values of water. Before 1929, there had already been much valuable research work on the thermodynamic properties of water and different steam tables had been used in different countries as shown in Table 1. But those steam tables do not agree at all grid points to within combined tolerances. The first conference had to start discussing the conversion factors of units regarding temperature, pressure, specific volume, and heat. The unit of heat, 1 kcal = 1/860 kW h, which was called “international steam table kilocalorie,” was decided at this conference. This conference also decided that the final recommendations of the conference regarding thermodynamic properties of water should be given in the form of skeleton tables, and a set of basic skeleton tables was prepared. This set of skeleton steam tables consisted of a saturated steam table in the temperature range up to 623 K and a superheated steam table in the range of temperatures up to 823 K and pressures up to 25 MPa. But the set of skeleton steam tables was not completed at this conference.<sup>16</sup>

In 1930, the Second International Steam Table Confer-

<sup>b)</sup> The single word “water” throughout this paper referred to ordinary water substance, light water, or H<sub>2</sub>O, including both the liquid state and the gaseous state.

Table 1. List of Steam Tables

Year	Country	Prepared by	Title	T/K	P/MPa	Base
1763	UK	J. Watt				
1847	France	H.V. Regnault				
1859	UK	W.J.M. Rankine	Manual of the Steam Engine			
1860	Germany	G. Zeuner	Grundzüge der mechanischen Wärmetheorie mit besonderer Rücksicht auf das Verhalten des Wasserdampfes			
1900	UK	H.L. Callendar				Callendar-eq.
1904	Germany	R. Mollier	Neue Diagramme zur Technischen Wärmelehre			Callendar-eq.
1905	Germany	G. Zeuner	Technische Thermodynamik, 3			
1906	Germany	R. Mollier	Neue Diagramme zur Technischen Wärmelehre	773	2	Callendar-eq.
1923	Germany	O. Knoblauch E. Raisch H. Hausen	Tabellen und Diagramme für Wasserdampf berechnet aus der spezifischen Wärme	723	6	
1925	USA	G. E.				
1925	Germany	R. Mollier	The Mollier Steam Tables and Diagrams	823	15	Mollier-eq.
1930	USA	J.H. Keenan (ASME)	Steam Tables and Mollier Diagram			Davis-eq.
1932	Germany	R. Mollier	Neue Tabellen und Diagramme für Wasserdampf			Mollier-eq.
1932	Germany	A. Knoblauch E. Raisch H. Hausen W. Koch	Tabellen und Diagramme für Wasserdampf	823	25	Hausen-eq. (IST-30)
1934	Japan	(JSME)	Steam Tables and Diagrams of the JSME	823	25	Sugawara-eq. (IST-30)
1936	USA	J.H. Keenan F.G. Keyes	Thermodynamic Properties of Steam including Data for the Liquid and Solid Phases	1147	39	Keyes-Smith-Gerry-eq. (IST-34)
1937	Germany	W. Koch (VDI)	VDI-Wasserdampf Tafeln mit einem Mollier-Diagramm auf einer besonderen Tafel	823	30	Koch-eq. (IST-34)
1939	UK	G.S. Callendar	The 1939 Callendar Steam Tables	811	23	(IST-34)
1940	USSR	A.C. Egerton M.P. Vukalovich				Vukalovich-eq. (IST-34)
1943	USA	J.H. Keenan F.G. Keyes	Thermodynamic Properties of Steam	1147	39	(IST-34)
1944	UK	G.S. Callendar	The 1939 Callendar Steam Tables	811	23	(IST-34)
1946	USSR	A.C. Egerton M.P. Vukalovich		823	30	Vukalovich-eq. (IST-34)
1949	UK	G.S. Callendar A.C. Egerton	The 1939 Callendar Steam Tables	811	23	(IST-34)
1950	Japan	S. Niwa (JSME)	Revised Steam Tables and Diagrams of the JSME	873	30	Tanishita-eq. (IST-34)
1951	USSR	M.P. Vukalovich	Thermodynamic Properties of water and Steam	973	30	Vukalovich-eq. (IST-34)
1952	USSR	(Ministry of Electric Stations)	Tables of Thermodynamic Properties of Water and Steam based on experimental data	873	30	(IST-34)
1952	Germany	W. Koch (VDI)	VDI-Wasserdampf Tafeln	811	30	Koch-eq. (IST 34)
1953	Sweden	O.H. Faxén	Thermodynamic Tables in the Metric System for Water and Steam	923	25	Jüza-eq. (IST-34)

Table 1. List of Steam Tables-continued

Year	Country	Prepared by	Title	T/K	P/MPa	Base	
1955	Swiss	L.S. Dzung W. Rohrbach	Enthalpy-Entropy-Diagram for Steam and Water	1073	50	Vukalovich-eq. (IST-34)	
1955	Japan	S. Sugawara (JSME)	Revised Steam Tables and Diagrams of the JSME	973	34	Tanishita-eq. (IST-34)	
1955	USSR	(Moscow Institute of Energetics)		973	30	(IST-34)	
1956	USSR	(Institute of Thermodynamics)		1073	40	(IST-34)	
1956	Germany	W. Koch E. Schmidt	VDI-Wasserdampftafeln mit einem Mollier-Diagramm bis 800°C	1073	30	Koch-eq. (IST-34)	
1958	USSR	M.P. Vukalovich	Thermodynamic Properties of Water and Steam	1273	100	Vukalovich-eq. (IST-34)	
1958	USSR	(Institute of Thermodynamics)	Tables for Thermodynamic Prop- erties of Water and Steam			(IST-63)	
1963	Germany	E. Schmidt	VDI-Wasserdampftafeln mit einem Mollier-Diagramm bis 800°C und einem T,s-Diagramm	973	50	Koch-eq. (IST-34, IST-63)	
1964	UK	R.W. Bain (NEL)	Steam Tables 1964, Physical Prop- erties of Water and Steam	1073	100	(IST-63)	
1963	USSR	M.P. Vukalovich	Tables of Thermodynamic Proper- ties of Water and Water Vapor				
1965	USSR	M.P. Vukalovich	Tables of Thermodynamic Proper- ties of Water and Water Vapor				
1967	UK	(ERA)	1967 Steam Tables	1073	100	(IST-63)	
1967	USA	C.A. Meyer R.B. McClintock G.J. Silvestri R.C. Spencer, Jr., (ASME)	ASME Steam Tables, Thermodynamic and Transport Properties of Steam	1073	100	(IFC-67, IST-63)	
1968	Japan	I. Tanishita (JSME)	1968 JSME Steam Tables	1073	100	(IFC-67, IST-63)	
1968	USA	J.H. Keenan F.G. Keyes P.G. Hill J.G. Moore	Steam Tables, Thermodynamic Prop- erties of Water including Vapor, Liquid, and Solid Phases	1573	100	Keenan-Keyes- Hill-Moore-eq.	
1969	Germany	E. Schmidt (ASME, JSME, and VDI)	Properties of Water and Steam in SI Units	1073	100	(IFC-67, IST-63)	
1969	USSR	M.P. Vukalovich S.L. Rivkin A.A. Alexandrov	Tables for Physical Properties of Water and Steam				
1970	UK	W.W. Campbell (Ministry of Technology)	UK Steam Tables in SI Units	1970	1073	100	(IFC-67, IST-63)
1975	USA	C.A. Meyer R.B. McClintock G.J. Silvestri R.C. Spencer, Jr., (ASME)	ASME Steam Tables, Thermodynamic and Transport Properties of Steam	1073	100	(IFC-67, IST-63)	
1975	USSR	S.L. Rivkin A.A. Alexandrov	Thermophysical Properties of Water and Steam				
1979	Germany	E. Schmidt U. Grigull (ASME, JSME, and VDI)	Properties of Water and Steam in SI-Units	1073	100	(IFC-67, IST-63)	
1980	Japan	I. Tanishita (JSME)	1980 SI JSME Steam Tables	1073	100	(IFC-67, IST-63)	
1984	USA	L. Haar J.S. Gallagher G.S. Kell	NBS/NRC Steam Tables, Thermodyn- amic and Transport Properties and Computer Programs for Vapor and Liquid States of Water in SI Units	22/3	3000	(IAPS-84)	

ence was held in Berlin and the discussion for the establishment of International Skeleton Tables was continued under the chairmanship of Nobel prize winner W. Nernst. The revised set of skeleton tables was worked out at this conference. But additional experimental data available had made it possible to enlarge the effective range of the proposed skeleton tables.<sup>17</sup>

The first International Skeleton Steam Tables, 1934(IST-34) were finally adopted at the Third International Steam Table Conference held at three locations in the United States: Washington, D.C. on Monday, September 17th; Cambridge, Massachusetts on Tuesday, September 18th; and New York, N.Y. on Wednesday, September 19th, 1934. The IST-34 contains specific volumes and total heats, the latter name being used instead of enthalpy at that time. The specific-volume table provided 159 values covering temperatures up to 823 K and pressures up to 40 MPa, while the total-heat table provided 143 values covering up to 823 K and 30 MPa; the specific volumes and total heats for saturated water and saturated steam were provided at 10 K intervals between 273 and 643 K and at 1 K intervals between 643 and 647 K. Based on IST-34, many steam tables were published in different countries, Keenan and Keyes prepared the Steam Tables in 1936, in the United States; the VDI-Steam Tables were published based on the equation of state developed by Koch in 1937, in the Federal Republic of Germany; Callendar and Egerton prepared the Steam Tables in 1939, in the United Kingdom; the JSME-Steam Tables were derived from the equation of state developed by Tanishita in 1950, in Japan; and the Russian Steam Tables were derived from the equation of state developed by Vukalovich in 1940, in the Soviet Union.

The name of the International Steam Table Conference was changed into "International Conference on the Properties of Steam (ICPS)" at the fourth ICPS held in Philadelphia, 1954. At the fourth ICPS, the scope of conference was enlarged to other properties of water including viscosity and thermal conductivity.

The fifth ICPS held in London, 1956, considered tentative newer skeleton tables but could not agree to accept them because experimental work had not come to satisfactory completion at that time. An International Coordinating Committee was then established to prepare newer skeleton steam tables for both equilibrium and transport properties. The committee consisted of four countries, the Federal Republic of Germany, the United Kingdom, the United States, and the Soviet Union; it met four times between the fifth and sixth ICPS, including informal committee meeting held in London, 1957. At the fifth ICPS, the unit of energy was decided as  $1 \text{ J} = 1 \text{ Ws} = 10^7 \text{ erg}$ , the unit of enthalpy as the  $\text{J/kg}$ . Furthermore, the reference state for steam tables was chosen to be liquid water at the triple point; at this point, the values of the internal energy and entropy were defined to be zero exactly.

The former International Skeleton Tables (IST-63), were adopted at the sixth ICPS held in New York, 1963, which provided specific-volume and enthalpy values at 580 points covering temperatures from 273 to 1073 K and pressures up to 100 MPa. The delegates and observers at the

sixth ICPS consisted of 63 participants including the experts from Canada, CSSR, France, FRG, Japan, Norway, Switzerland, the UK, the USA, and the USSR. The skeleton tables of viscosity and thermal conductivity were also authorized in 1964 under the name of "Supplementary Release on Transport Properties," November 1964 (IST-64). At the sixth ICPS most members recognized it to be important that all countries use the same property values in design and performance calculations of power plants. Therefore, the International Formulation Committee of the Sixth International Conference on the Properties of Steam (IFC) was set up in 1963 in order to develop a unified international formulation for use with computers. The IFC consisted of six national formulation teams including CSSR, FRG, Japan, the UK, the USA, and the USSR.

The 1967 IFC Formulation for Industrial Use (IFC-67),<sup>18</sup> which was formulated by combining separate equations in six subregions,<sup>19-22</sup> was established by IFC. The IFC-67 is being used effectively in most of the engineering calculations at present. The 1968 IFC Formulation for Scientific and General Use (IFC-68)<sup>23</sup> was also prepared by IFC. With the exception of the USSR, which base its steam tables on IFC-68, steam tables based on IFC-67 are used in many countries.<sup>24</sup> The computer software of IFC-67 is also currently available everywhere.

In 1968, the seventh ICPS held in Tokyo appointed a standing organization for the international cooperation on the properties of steam, the International Organization for the Properties of Steam (IOPS), by seven countries including CSSR, France, FRG, Japan, the UK, the USA, and the USSR, which was renamed as the International Association for the Properties of Steam (IAPS) at the meeting of IOPS executive committee in Moscow, 1970. This executive committee in Moscow also agreed to set up three Working Groups, namely, Working Group 1 on the equilibrium properties, Working Group 2 on the transport properties, and Working Group 3 on the other properties of water and steam. Working Group 4 on the chemical thermodynamics in power cycles was established at the meeting of the IAPS executive committee in Ottawa, 1975. The meetings of the IAPS executive committee and working groups have been continuously held every year from the first executive committee meeting under the IOPS in Moscow, 1970, up to the present.

The revision of IST-63 was discussed at the eighth ICPS, held in Gien, France, in 1974, and many releases were issued by IAPS between the eighth and ninth ICPS; the former Dynamic Viscosity of Water Substance, 1975; the former Thermal Conductivity of Water Substance, 1977; The current Surface Tension of Water Substance, 1976; and the current Static Dielectric Constant of Water Substance, 1977.

The ninth ICPS was held in Munich in 1979 and commemorated the golden anniversary of Steam Property Conferences. White, the Executive Secretary of IAPS, reported the history of 50 years on international collaboration for the thermophysical properties of water.<sup>25</sup> The Japan National Committee on the Properties of Steam, the 139th Committee of the Japan Society for the Promotion of Science, compiled all reports and releases issued by ICPS and IAPS over a 50-

year period between 1929 and 1979 in two volumes.<sup>26</sup> At the ninth ICPS, Straub, as the chairman of Working Group 1, introduced the status of experimental study and the activity of IAPS on the equilibrium properties of water in the period between 1974 and 1979.<sup>27</sup> He reported that the number of experimental thermodynamic property data obtained from 1890 up to 1979 was about 12 000 specific-volume data and about 5000 caloric data. And he made it clear that, of these, about 6000 specific-volume data and 2000 caloric data were reported after 1961 and had not been taken into account for the establishment of IST-63. Then he concluded that the main task for Working Group 1 was the preparation of a new representation of the thermodynamic surface of water by developing revised international skeleton tables and a new formulation.

The requirement was satisfied at the tenth ICPS held in Moscow, 1984, with the acceptance of the IAPS Formulation 1984 for the Thermodynamic Properties of Ordinary Water Substance for Scientific and General Use (IAPS-84)<sup>28</sup> and the IAPS Skeleton Tables 1985 for the Thermodynamic Properties of Ordinary Water Substance (IST-85).<sup>29</sup> The IST-85 was proposed at the tenth ICPS and was accepted finally at the meeting of IAPS executive committee held in Gaithersburg (U.S.) 1985. The releases on the Dynamic Viscosity 1975 and Thermal Conductivity 1977 were also revised according to the revision of its density values at the meeting as the IAPS Formulation 1985 for the Viscosity of Ordinary Water Substance and the IAPS Formulation 1985 for the Thermal Conductivity of Ordinary Water Substance, respectively.

In addition, the following current releases were issued by IAPS between the ninth and tenth ICPS: the Ion Product of Water Substance, 1980; the 1983 IAPS Statement, Values of Temperature, Pressure, and Density of Ordinary and Heavy Water Substances at Their Respective Critical Points<sup>30</sup>; the IAPS Formulation 1984 for the Thermodynamic Properties of Heavy Water Substance; the Viscosity and Thermal Conductivity of Heavy Water Substance, 1984.

At present, IAPS are shifting emphasis to the study of the properties of aqueous mixtures and solutions. Accordingly, the four Working Groups of IAPS were reorganized into two Working Groups at the meeting of the IAPS executive committee in Moscow, 1984. Working Group A is responsible for thermophysical properties of ordinary and heavy water substance and aqueous systems not adopted for the study by Working Group B, whereas Working Group B is responsible for chemical thermodynamics of power cycles.

The historical progress on Steam Tables published in various countries and three International Skeleton Tables

(IST) for the thermodynamic properties of water is summarized in Tables 1 and 2, separately. Note that while the IST has been revised three times, the International Practical Temperature Scale has been also changed three times from the International Temperature Scale of 1927 (ITS-27) to the International Practical Temperature Scale of 1948 (IPTS-48)<sup>31</sup>, and to IPTS-68.<sup>32</sup>

### 3. Experimental Situation

#### 3.1. Single-Fluid Phase State

A detailed data survey on the thermodynamic properties of water was conducted in 1974 by Watanabe and Uematsu.<sup>33</sup> Many experimental data were summarized and discussed in this survey. In addition, most of those data were compared with IFC-67, the so-called MIT Formulation devised by Keenan, Keyes, Hill, and Moore,<sup>34</sup> IFC-68, and the equation of state devised by Jůza in 1966.<sup>35</sup> The work performed by Watanabe led to IAPS discussions on the necessity of revisions of IST-63 and IFC-68 at Working Group meetings in Schliersee, 1975. The discussion was continued at meetings of IAPS in Ottawa, 1975, in Kyoto, 1976, in Moscow, 1977, and in Washington, 1978.

The "International Input," critically evaluated and internationally agreed upon thermodynamic properties data set for the establishment of new standards, was prepared by members of Working Group 1 of IAPS, namely, Alexandrov, Jůza, Levelt Sengers, Straub, Uematsu, and Watanabe for the experimental specific-volume data as well as Alexandrov, Jůza, and Straub for the caloric property data including heat capacity, enthalpy, and internal energy. The results were compiled and reported by Straub and Rosner as an internal IAPS report in 1977.<sup>36,37</sup> The report lists more than 170 papers as primary data base; 91 papers for the specific volume and 38 papers for the caloric properties were selected, with the evaluated results ranked, in order of decreasing reliability, from A to D.

##### 3.1.a. Specific Volume

Concerning the specific volume at high temperatures and high pressures, 44 experimental data sets were collected. They are listed in Table 3, which begins with the data reported by Amagat in 1893<sup>38</sup> and ends with that by Hanafusa *et al.* in 1984.<sup>104</sup> The total number of the experimental data listed in Table 3 is 10 490 including 4476 data points classified with rank A, 1441 points with rank B, 3186 points with rank C and additional 1387 unclassified data points reported more recently.

The distribution of 6597 experimental data points which are affixed with an asterisk to the authors' name in Table 3 and 231 specific-volume data derived by Chen *et al.*<sup>85</sup> from speed-of-sound data, is shown in Figs. 1 and 2 on the pressure-temperature diagram with different symbols for different series of measurements. Figure 1 shows the distribution of 1422 data points reported prior to 1963 when the former international skeleton tables were issued, and Fig. 2 shows the distribution of 5406 data points reported after 1964. Most of specific-volume data in the range correspond-

Table 2. Historical progress of International Skeleton Tables

International Skeleton Tables (IST)	Property	Range		Grid points	Temp. scale
		Temperature K	Pressure MPa		
IST-34	volume( <i>v</i> )	273 - 823	0.1 - 40	159	ITS-27
	enthalpy( <i>h</i> )	273 - 823	0.1 - 30	143	ITS-27
IST-63	<i>v</i> , <i>h</i>	273 - 1073	0.1 - 100	580	IPTS-48
IST-85	<i>v</i> , <i>h</i>	273 - 1073	0.1 - 1000	1455	IPTS-68



Table 3. Experimental studies on the specific volume of water

Authors	Year	Ref.	Temperature		Pressure		No. of data	Error in volume %	Evaluation <sup>a</sup> , %		
			K		MPa				Regions		
								1	2	3	
Amagat	1893	38	273	--	423	0.1	--	300	611		
Bridgman	1912	39	253	--	298	0.1	--	981	142		
Bridgman	1913	40	253	--	353	0.1	--	1226	415		
Bridgman	1931	41	273	--	368	0.1	--	1079	31		
Bridgman	1935	42	253	--	373	0.1	--	1177	124		
*Smith/Keyes	1934	43	303	--	647	0.4	--	35	307	0.01	0.012 0.055
*Keyes/Smith/Gerry	1935	44	468	--	733	1.3	--	36	289		
Kennedy	1957	45	473	--	274	1	--	10	741		
Kennedy/Knight/Holser	1958	46	273	--	373	0.1	--	140	165		
Holser/Kennedy	1958	47	393	--	673	10	--	140	270		
Holser/Kennedy	1959	48	693	--	274	15	--	140	510		
Kirillin/Ulybin	1959	49	571	--	923	8.1	--	95	488	0.2	
Vukalovich/Zubarev/ Alexandrov	1959	50	423	--	573	2.5	--	123	77	0.1	
*Vukalovich/Zubarev/ Alexandrov	1961	51	673	--	923	4.8	--	121	175	0.2	
*Vukalovich/Zubarev/ Alexandrov	1962	52	973	--	1173	4.7	--	121	148	0.2	0.066
*Jůza/Kmoniček/Šifner	1961	53	347	--	623	26.6	--	350	64	0.2	0.12
*Rivkin/Akhundov	1962	54	633	--	693	5.0	--	38	249	0.05	0.081
*Rivkin/Akhundov	1963	55	647	--	773	4.8	--	60	190	0.05	
*Rivkin/Troyanovskaya/ Akhundov	1964	56	633	--	660	9.0	--	34	121	0.04	
*Rivkin/Troyanovskaya	1964	57	645	--	662	22.2	--	27	316	0.04	
*Rivkin/Akhundov/ Kremenevskaya/ Asadullaeva	1966	58	645	--	647	14.6	--	24	103	0.04	
Tanishita/Watanabe	1963	59	873	--	1173	8.5	--	88	79	0.2	
Tanishita/Watanabe/ Kijima/Uematsu	1968	60	643	--	693	9.4	--	72	132	0.2	

Table 3. Experimental studies on the specific volume of water-continued

Authors	Year	Ref.	Temperature		Pressure		No. of data	Error in volume %	Evaluation <sup>a</sup> , %		
			K		MPa				Regions	1	2
*Tanishita/Watanabe/ Kijima/Ishii/Oguchi/ Uematsu	1976	61	423	-- 773	1.7	-- 195	158	0.03	0.029	0.085	0.069
Sugawara/Sato/Minamiyama	1964	62	869	-- 1108	6.1	-- 14	108	0.2			
*Maier/Franck	1966	63	473	-- 1123	93	-- 600	196	1		0.58	
*Köster/Franck	1969	64	298	-- 873	50	-- 1000	288	1		0.35	
*Vedam/Holton	1968	65	303	-- 353	0.1	-- 1000	120	0.2		0.050	
*Borzunov/Razumikhin/ Stekol'nikov	1970	66	293	-- 338	0.1	-- 923	66	0.05		0.15	
*Grindley/Lind	1971	67	298	-- 423	0.1	-- 300	560	0.01	0.012	0.034	
*Garnjost	1974	68	374	-- 573	9.2	-- 74	68	0.006	0.016		
*Grigoryev/Murdaev/ Rastorguyev	1974	69	293	-- 633	1.6	-- 83	123	0.018	0.008		
*Kell/McLaurin/Whalley	1974	70	648	-- 773	4.2	-- 103	426	0.043	0.037	0.081	
*Kell/Whalley	1975	71	273	-- 423	0.1	-- 103	596	0.003	0.004	0.030	
*Kell/McLaurin/Whalley	1978	72	423	-- 623	0.5	-- 103	196	0.01	0.025	0.029	
*Alexandrov/Khasanshin/ Larkin	1976	73	264	-- 278	5	-- 102	60	0.005	0.018	0.077	
*Alexandrov/Khasanshin/ Larkin	1976	74	423	-- 653	5	-- 101	96				
*Zubarev/Prusakov/ Barkovskii	1977	75	673	-- 873	30	-- 200	58	0.1		0.1	0.079
*Zubarev/Prusakov/ Barkovskii	1977	76	923	-- 1123	30	-- 200	54	0.1			
*Burnham/Holloway/ Davis	1977	77	293	-- 1173	100	-- 310	1321			0.25	
*Hilbert/Tödheide/ Franck	1981	78	293	-- 873	10	-- 400	134	0.2	0.050	0.099	0.15
*Hanafusa/Tsuchida/Araki/ Sato/Uematsu/Watanabe	1984	104	43	-- 653	20	-- 40	115	0.04			

\* The data used to establish the skeleton tables in the present study.

<sup>a</sup> Evaluated errors for the specific-volume values due to the statistical method proposed by Sato et al. as described in Sec. 5.1.a. The regions are corresponding to those in Fig. 5.

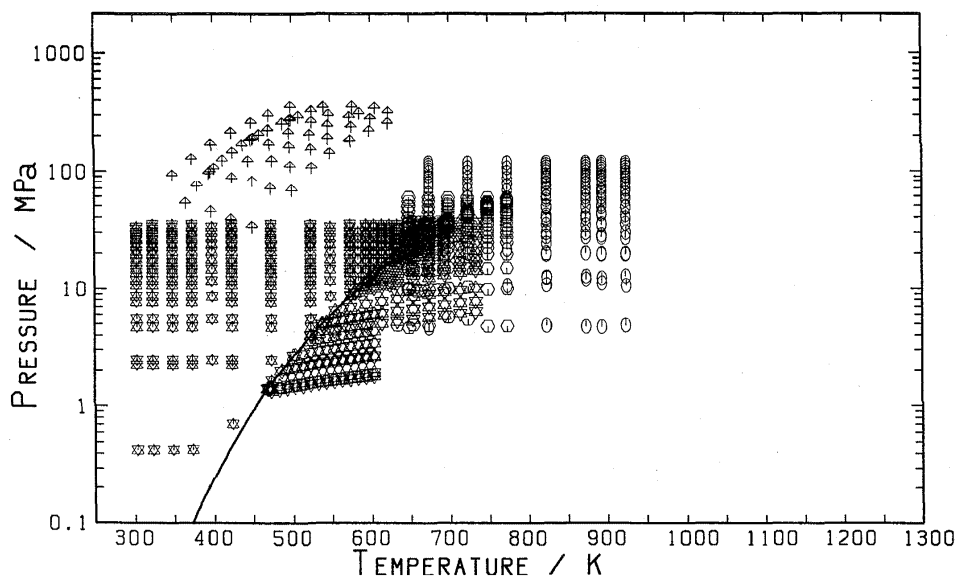


Fig. 1. Experimental data of the specific volume of water published prior to 1963 on the pressure-temperature plane. Specific volume measured by Smith and Keyes ( $\times$ ), Keyes et al. ( $\ast$ ), Vukalovich et al. in 1961 ( $\odot$ ), in 1962 ( $\circ$ ), Jůza et al. ( $\blacktriangle$ ), Rivkin et al. in 1962 ( $\ominus$ ) and in 1963 ( $\oplus$ ) are shown.

ing to the temperatures from 273 to 1173 K and pressures up to 1 GPa have been replaced with newer data reported after 1964 as shown in Fig. 2.

The first accurate measurements for the density of water in a large pressure range were reported by Amagat in

1893.<sup>38</sup> According to the description by Dorsey in 1940,<sup>80</sup> the original specific-volume values reported by Amagat should be multiplied by 1.000 159 in order to get specific-volume values in  $\text{dm}^3/\text{kg}$ .

Similarly, a conversion factor of 0.055 509 6 should be

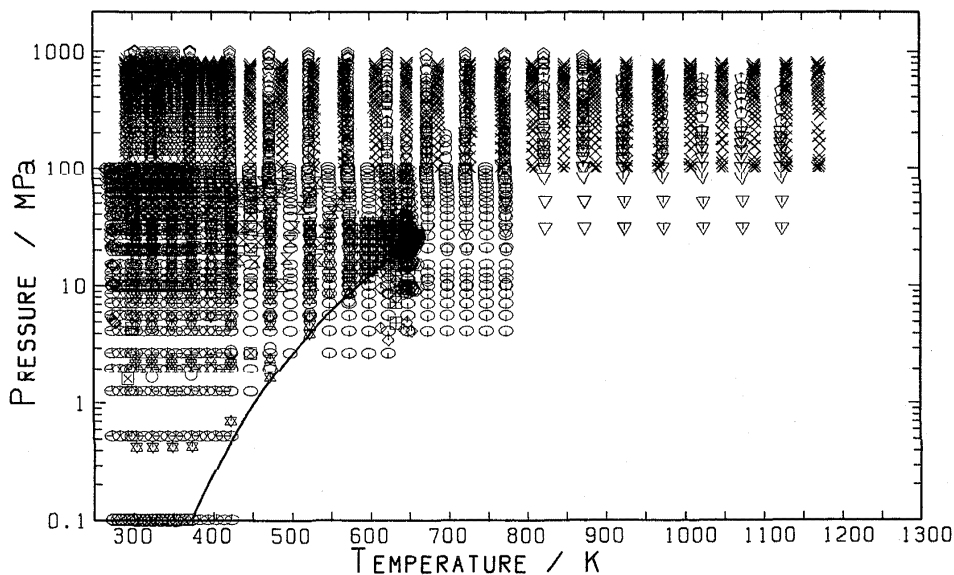


Fig. 2. Experimental data of the specific volume of water published after 1964 on the pressure-temperature plane. Specific volumes measured by Rivkin et al. in 1964 ( $\odot$ ), ( $\oplus$ ), and in 1966 ( $\ominus$ ), Tanishita et al. ( $\circ$ ), Maier and Franck ( $\blacktriangledown$ ), Kuster and Franck ( $\blacktriangledown$ ), Vedam and Holton ( $\times$ ), Borzunov et al. ( $\times$ ), Grindley and Lind ( $\triangle$ ), Garnjost ( $\times$ ), Grigoryev ( $\boxplus$ ) and ( $\boxtimes$ ), Kell et al. in 1974 ( $\odot$ ), Kell and Whalley ( $\ominus$ ), Kell et al. in 1978 ( $\odot$ ), Alexandrov et al. ( $\diamond$ ), Alexandrov et al. ( $\diamond$ ), Zubarev et al. in 1977 ( $\nabla$ ), Burnham et al. ( $\times$ ), Chen et al. ( $\oplus$ ), Hilbert et al. ( $\boxtimes$ ), Hanafusa et al. ( $\oplus$ ), are shown.

multiplied to the original molar-volume values measured by Bridgman in 1912,<sup>39</sup> 1913,<sup>40</sup> 1931,<sup>41</sup> and 1935.<sup>42</sup> Bridgman's 1912 data<sup>39</sup> seemed to be preferable to those of 1935<sup>42</sup> as described by Vedam and Holton.<sup>65</sup> The specific-volume data determined by Vedam and Holton agree with Bridgman's 1912 data to within  $\pm 0.1\%$ . They pointed out that Bridgman had used the incorrect data in his calibration of pressure at 273 K. The same conclusion was reached by Grindley and Lind,<sup>67</sup> whose specific-volume data agreed with Bridgman's earlier measurements<sup>40</sup> to within  $\pm 0.17\%$ , after correcting Bridgman's pressure scale; while Bridgman's later data obtained with the siphon-bellows techniques<sup>42</sup> lie 0.6% above those of Grindley and Lind.

Similar correction must be made to the pressure scale for the measurements of Burnham *et al.* in 1969<sup>81</sup> as pointed out by Grindley and Lind. The corrected Burnham's data were circulated to members of Working Group 1 of IAPS in 1977.<sup>77</sup>

Smith and Keyes reported specific volumes of liquid water in 1934<sup>43</sup> and those of steam and at saturation in 1935.<sup>44</sup> During the course of their experimental work on liquid water, three independent series of measurements were made in three cylindrical vessels made of different materials, a nickel vessel at temperatures from 303 to 573 K, a chrome-vanadium vessel at temperatures from 423 to 633 K, and a number 1B Nirosta 18/8 vessel at temperatures from 303 to 633 K, respectively. These data are still valuable, except for those measured by using the nickel vessel which are lower by about 0.05% in specific volume than those measured by using other vessels.

Kennedy in 1957,<sup>45</sup> Kennedy *et al.* in 1958,<sup>46</sup> and Holser and Kennedy in 1958<sup>47</sup> and 1959<sup>48</sup> added an oxidizing agent (CuO) to water so as to prevent the reaction between water and experimental bomb wall at high temperatures. Their data have systematic errors along the 323, 473, 673, and 773 K isotherms as shown in the figures prepared by Tanishita *et al.*<sup>61</sup>

Kirillin and Ulybin<sup>49</sup> summarized a series of their data reported from 1953 to 1959 in various papers. Their work was followed by that of Vukalovich *et al.*, who reported experimental data in the extended range including liquid water<sup>50</sup> and steam,<sup>51,52</sup> at temperatures up to 1173 K and pressures up to 120 MPa in 1959 to 1962. In addition, Zubarev *et al.* extended the pressure range to 200 MPa in 1977.<sup>75,76</sup>

Alexandrov *et al.* measured specific volumes at two special regions, namely, a region near the critical point and a region including the locus of maximum density. The experimental data were reported at the states adjacent to the critical point along every 10 K interval between 613 and 653 K at pressures up to 101 MPa in 1974.<sup>82</sup> They reported later that those data, because of the incorrect treatment of their measured pressures, required corrections of up to 0.072% in specific volume. The corrected values were presented to members of Working Group 1 in 1976.<sup>74</sup> Another set of experimental data reported by Alexandrov *et al.*<sup>73</sup> is valuable information for revealing the behavior in the region where a density maximum is present on isobars below about 40 MPa. They measured specific volumes along isotherms at 1 K in-

tervals between 264 and 278 K in the pressure range from 5 to 102 MPa.

Jüza *et al.* reported specific volumes at high pressures from 27 to 350 MPa and temperatures from 347 to 623 K with an uncertainty of  $\pm 0.2\%$  in 1961<sup>53</sup>; smoothed specific-volume values were given in an appendix to their 1966 publication on their equation of state<sup>35</sup> at temperatures from 373 to 623 K and pressures from 100 to 450 MPa with an uncertainty of  $\pm 0.3\%$  in specific volume.

Maier and Franck in 1966,<sup>63</sup> Vedam and Holton in 1968,<sup>65</sup> Köster and Franck in 1969,<sup>64</sup> Borzunov *et al.* in 1970,<sup>66</sup> Grindley and Lind in 1971,<sup>67</sup> and Hilbert *et al.* in 1981<sup>78</sup> reported experimental data at very high pressures with the claimed uncertainty of  $\pm 1\%$ ,  $\pm 0.2\%$ ,  $\pm 1\%$ ,  $\pm 0.05\%$ ,  $\pm 0.01\%$ , and  $\pm 0.02\%$  in specific volume, respectively.

Maier and Franck used a corrosion resistant nickel-base alloy for their constant-volume vessel for measurements at temperatures from 473 to 1123 K and pressures up to 600 MPa. Köster and Franck improved the apparatus of Maier and Franck and measured specific volumes at temperatures from 298 to 873 K and pressures up to 1 GPa.

Vedam and Holton measured speed of sound at temperatures from 303 to 353 K and pressures from 0.1 MPa to 1 GPa in 1968 and developed a computer-aided procedure for obtaining specific-volume values from speed-of-sound data.

Borzunov *et al.* used a glass pycnometer to measure the density of liquid water at temperatures up to 338 K and pressures up to 923 MPa in 1970; although their claimed uncertainty was reported as  $\pm 0.05\%$ , their specific volumes deviate systematically by about 0.2% from other measurements.

Grindley and Lind measured specific volumes up to 800 MPa between 298 and 423 K by electromagnetic detection of the change in length of a water column.

Hilbert *et al.* used an internally heated pressure vessel including a nickel bellows to measure specific volumes of water and aqueous electrolyte solutions in the range from 293 to 873 K and from 10 to 400 MPa.

Tanishita *et al.* reported specific volumes of steam in 1963,<sup>59</sup> those in the region near the critical point in 1968,<sup>60</sup> and those in the extended range, temperatures from 423 to 773 K and pressures up to 195 MPa, in 1976<sup>61</sup> by using a constant volume vessel made of platinum; its inner volume was 240 cm<sup>3</sup>. The data reported in 1976, with an uncertainty of  $\pm 0.03\%$  in specific volume, give information at high pressures up to 200 MPa over a wide temperature range up to 773 K where accurate data have scarcely been available.

Sugawara *et al.*<sup>62</sup> measured specific volumes of superheated steam at high temperatures between 869 and 1108 K, and at moderate pressures below 14 MPa with an uncertainty of  $\pm 0.2\%$  by using a 70-cm<sup>3</sup> quartz-glass vessel in 1964.

Garnjost<sup>68</sup> reported specific volumes along isochores in the temperature range from 374 to 573 K and the pressure range from 9.2 to 74 MPa in 1974 with uncertainty of  $\pm 0.012\%$  in pressure,  $\pm 0.01$  K in temperature, and from  $\pm 0.006\%$  to  $\pm 0.037\%$  in specific volume, respectively.

In the region near the critical point, Rivkin *et al.*,<sup>54-58</sup>

Grigoryev *et al.*,<sup>69</sup> and Hanafusa *et al.*<sup>104</sup> have reported specific volumes. Rivkin *et al.* measured 979 experimental data in the immediate vicinity of the critical point with uncertainty of  $\pm 0.04\%$  to  $\pm 0.05\%$  in specific volume, which were reported in five different publications from 1962 to 1966. Grigoryev *et al.* reported data in 1974 which were measured by using two different vessels made of Kh18N10T steel, one of 185 cm<sup>3</sup> and the other 804 cm<sup>3</sup> in inner volume. The data at 298, 523, 573, 623, and 633 K were measured in the small vessel with an uncertainty of  $\pm 0.043\%$  in specific volume and the data along eight isotherms between 298 and 448 K were measured in the large vessel with an uncertainty of  $\pm 0.018\%$ . Hanafusa *et al.* reported 115 specific volumes and eight vapor pressures in the temperature range from 643 to 653 K, the pressure range from 20 to 40 MPa, and the density range from 136 to 617 kg/m<sup>3</sup>, with an uncertainty of  $\pm 0.04\%$  in specific volume. Part of the results, namely, 66 specific volumes and four vapor pressures, were reported in advance in 1983.<sup>79</sup> The measurements were conducted by using a 188 cm<sup>3</sup> spherical vessel made of 304 stainless steel.

In the liquid water region, four different specific-volume data sets have been reported in the range of temperatures up to 773 K and pressures up to 100 MPa by Kell *et al.* in 1974,<sup>70</sup> 1975,<sup>71</sup> and 1978,<sup>72</sup> and by Chen *et al.* in 1977.<sup>85</sup> Kell *et al.* reported 1218 experimental data at temperatures from 273 to 773 K and pressures from 0.1 to 103 MPa with a 250 cm<sup>3</sup> cylindrical vessel made of 304 stainless steel for the measurements at temperatures below 623 K, while a 35-cm<sup>3</sup> vessel was used for the measurements at temperatures between 623 and 773 K. Detailed description concerning their apparatus was reported in 1965<sup>84</sup> together with the data at temperatures from 273 to 423 K and pressures up to 103 MPa. But the data reported in 1965 were revised due to the recalculation of the compressibility of their vessel on the basis of newly obtained speed of sound data in 1975.<sup>71</sup> The revised values exceed the original specific-volume data by about 0.01%.

Very precise thermodynamic data have been obtained at atmospheric pressure in the temperature range from 273 to 423 K including metastable states between 373 and 423 K.

Those are specific-volume data measured by Gildseth *et al.* in 1972<sup>86</sup> at temperatures from 278 to 353 K, those by Kell in 1975<sup>87</sup> at temperatures from 273 to 423 K, speed-of-sound data by Del Grosso and Mader in 1970<sup>88</sup> and 1972<sup>89</sup> at temperatures from 273 to 368 K, and heat capacity data by de Haas in 1950<sup>90</sup> at temperatures up to 373 K. Based on such precise experimental data, Chen *et al.* in 1977<sup>85</sup> and Sato *et al.* in 1985<sup>91</sup> reported equations of state, respectively.

Chen *et al.* derived specific-volume data at temperatures from 273 to 373 K and pressures up to 100 MPa with a claimed uncertainty of  $\pm 20$  ppm from the speed-of-sound data measured by Wilson<sup>92</sup> and by Del Grosso and Mader. This equation includes the correlation developed by Kell<sup>87</sup> for density of liquid water at atmospheric pressure.

Sato *et al.* reported an equation of state for liquid water from 273 to 423 K and pressures up to 1 GPa from which all thermodynamic properties can be derived with high reliability reflecting precise experimental data. At atmospheric pressure, this equation represents specific volumes measured by Gildseth *et al.*<sup>86</sup> at temperatures from 278 to 353 K with an absolute average deviation of 2 ppm and a maximum absolute deviation of 4 ppm, specific volumes measured by Kell<sup>87</sup> at temperatures from 273 to 423 K with an absolute average deviation of 2 ppm and a maximum absolute deviation of 7 ppm, speed-of-sound data measured by Del Grosso and Mader<sup>88,89</sup> within  $\pm 50$  ppm at temperatures from 273 to 368 K, and heat capacity data reported by de Haas<sup>90</sup> within  $\pm 5$  J/(kg K) at temperatures up to 353 K and  $\pm 7$  J/(kg K) at temperatures up to 373 K, respectively. This equation can represent all well-known thermodynamic singularities of liquid water such as maximum density, minimum isobaric specific heat, maximum speed of sound, etc.

### 3.1.b. Enthalpy

Comparing with the amount of available specific-volume data, the total amount of enthalpy data is very limited. Working Group 1 of IAPS selected seven experimental data sets as "International Input" listed in Table 4. The distribution of these data, which include Osborne's data along the

Table 4. Experimental studies on the enthalpy of water

Authors	Year	Ref.	Temperature K	Pressure MPa	No. of data	Uncertainty in enthalpy
Havliček/Miškovský	1936	93	293 -- 823	0.1 --	39.2 104	0.25 %
Vukalovich/Zubarev/ Prusakov	1958	94	720 -- 823	20 --	40 48	6 kJ/kg
Callendar/Egerton	1960	97	473 -- 873	0.5 --	22 120	2.1 kJ/kg
Vukalovich/Zubarev/ Prusakov	1962	95	673 -- 883	20 --	54 56	6 kJ/kg
Vukalovich/Zubarev/ Prusakov	1963	96	673 -- 983	2.5 --	49 48	
Sheindlin/Gorbunova	1964	98	618 -- 734	20 --	49 72	
Angus/Newitt	1966	99	673 -- 973	6 --	100 16	0.1 %

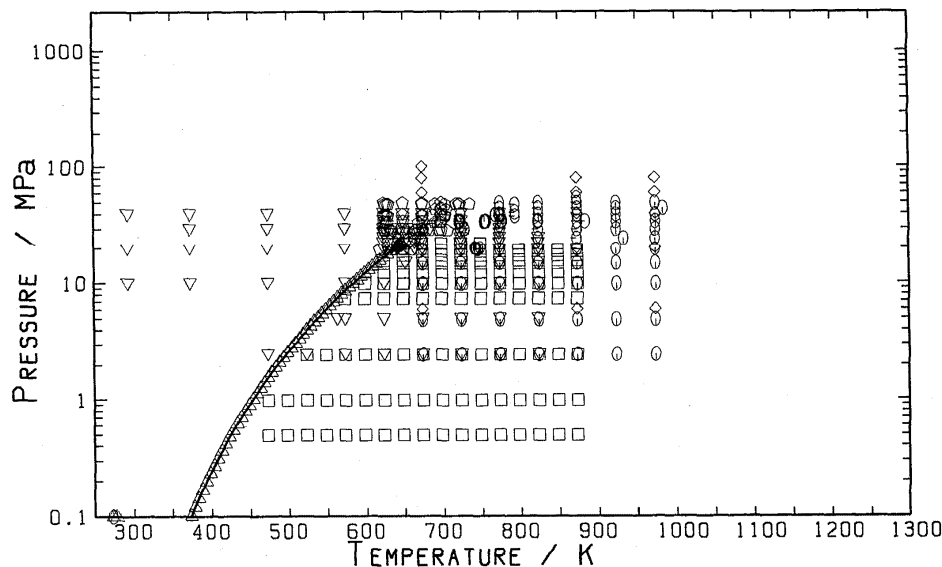


Fig. 3. Experimental data of the enthalpy on the pressure-temperature plane. Enthalpies measured by Havlicek and Miskovsky ( $\nabla$ ), Osborne et al. in 1937 ( $\Delta$ ) and in 1939 ( $\triangle$ ), Vukalovich et al. in 1958 ( $\circ$ ), in 1962 ( $\ominus$ ) and in 1963 ( $\oplus$ ), Callendar and Egerton ( $\square$ ), Sheindlin and Gorbunova ( $\circ$ ), and Angus and Newitt ( $\diamond$ ) are shown.

saturation curve,<sup>105,107</sup> is shown on a pressure-temperature diagram in Fig. 3. The total number of experimental data listed in Table 4 is 464 excluding Osborne's data; they cover the temperature range from 293 to 983 K and pressure range up to 100 MPa.

Angus and Newitt<sup>99</sup> reported 16 enthalpy values with an uncertainty of  $\pm 0.1\%$  at temperatures from 673 to 973 K and pressures from 6 to 100 MPa in 1966; they were derived from 382 experimental measurements performed between 1959 and 1964. Their data agree in the range of overlap with the data of Havlicek and Miskovsky in 1936,<sup>93</sup> the data of Vukalovich *et al.* in 1958<sup>94</sup> and 1962,<sup>95</sup> and the data of Callendar and Egerton in 1960<sup>97</sup> within the respective claimed uncertainty.

The scarceness of experimental data on enthalpy is mainly understood as a result of difficulty in measuring the caloric properties precisely. Sato *et al.*<sup>9</sup> have pointed out that in the case of water the reliability of enthalpy values derived from equations of state might be higher than the reliability of experimental enthalpy data, since many accurate experimental data regarding specific volume and heat capacity are available at present for formulating equations of state.

### 3.2. Saturation State

#### 3.2.a. Vapor Pressure

In 1974, Wagner<sup>12</sup> reviewed and evaluated most of vapor-pressure data of water in order to establish his vapor-

Table 5. Experimental studies on the vapor pressures of water

Authors	Year Ref.	Temperature K	No. of data	Uncertainty in pressure
Osborne/Stimson/Fiock/Ginnings	1933 100	373 -- 647	382	0.03 %
Rivkin/Troyanovskaya/Akhundov	1964 101	646 -- 647	13	
Stimson	1969 102	298 -- 373	7	0.002 %
Kell/McLaurin/Whalley	1974 70	423 -- 623	22	0.2-0.3 kPa
Guildner/Johnson/Jones	1976 103	273.16	1	0.010 Pa
Hanafusa/Tsuchida/Kawai/Sato/Uematsu/Watanabe	1984 104	643 -- 646	7	3 kPa

pressure equation. Based on that review, six experimental data sets were selected for representing the vapor-pressure curve of water as listed in Table 5. Guildner *et al.* measured the triple-point pressure with an uncertainty of  $\pm 0.010$  Pa in 1976.<sup>103</sup> Stimson measured vapor pressures up to 373 K with an uncertainty of  $\pm 0.002\%$  in 1969.<sup>102</sup> Osborne *et al.* measured vapor pressures with an uncertainty of  $\pm 0.03\%$  in 1933,<sup>100</sup> which are still valuable information at temperatures between 373 and 647 K.

### 3.2.b. Specific Volume

Concerning specific volumes of saturated water, very few reliable data are available as listed in Table 6. Smith and Keyes<sup>43</sup> measured specific volumes of saturated water at temperatures between 303 and 633 K. The specific-volume values below 593 K are valuable input, but the data above 593 K deviate systematically from other data.

Kell<sup>87</sup> derived correlations of density and of isothermal compressibility of liquid water at atmospheric pressure based on precise experimental data. Those correlations are effective in the temperature range from 273 to 423 K. The saturated liquid density of water can be derived from these correlations by means of the relation,

$$\rho' = \rho(T, P_0) \{1 + \kappa_T(T, P_0) [P_s(T) - P_0]\}, \quad (1)$$

where  $\rho'$ ,  $\kappa_T$ ,  $P_s$ , and  $P_0$  are saturated water density, isothermal compressibility, vapor pressure, and atmospheric pressure, respectively.

Osborne, Stimson, and Ginnings<sup>105</sup> determined specific-volume values from measurements of the caloric quantity  $\beta$  by means of the relation,

$$v' = \beta \left/ \left( T \frac{dP_s}{dT} \right) \right., \quad (2)$$

where  $v'$  and  $T$  are specific volume of saturated water and temperature, respectively. Their  $\beta$  data cover the temperature range from 373 to 647 K.

The specific volume of saturated steam  $v''$  is derived from Osborne's measurements of the caloric quantity  $\gamma$  as listed in Table 7 by means of the relation,

$$v'' = \gamma \left/ \left( T \frac{dP_s}{dT} \right) \right. \quad (3)$$

The  $\gamma$  values obtained by Osborne *et al.* at temperatures beyond 645 K are not recommended to be used because they are not consistent with the critical parameters accepted by IAPS.<sup>30</sup>

Table 6. Experimental studies on the specific volume of saturated water

Authors	Year	Ref.	Temperature K	No. of data	Uncertainty in volume
Smith/Keyes	1934	43	303 -- 593	9	0.05 %
Osborne/Stimson/ Ginnings	1937	105	373 -- 647	29	
Kell/McLaurin/Whalley	1974	70	423 -- 623	22	
Kell	1975	87	273 -- 423	32	10 ppm

Table 7. Experimental studies on the specific volume of saturated steam

Authors	Year	Ref.	Temperature K	No. of data
Osborne/Stimson/ Ginnings	1937	105	373 -- 645	189
Osborne/Stimson/ Ginnings	1939	107	273 -- 373	146

### 3.2.c. Enthalpy

As described in the previous section, Osborne and his co-workers at the National Institute of Standards and Technology<sup>105,107</sup> listed in Table 8 carried out calorimetric measurements along saturation curve. They used the international joule which is equal to 1.000 165 J according to the analysis of Stimson.<sup>110</sup> They measured the caloric quantities  $\alpha$ ,  $\beta$ , and  $\gamma$ . The  $\alpha$  depends only on temperature, which is defined by the following expression;

$$\alpha = h' - \beta = h'' - \gamma. \quad (4)$$

where  $h'$  and  $h''$  are enthalpies of saturated water and steam;  $\beta$  and  $\gamma$  are experimental values defined by Eqs. (2) and (3). The enthalpy values and latent heat can be derived from Osborne's calorimetric measurements of  $\alpha$ ,  $\beta$ , and  $\gamma$  according to Eq. (4). Near the critical point Baehr *et al.* measured the internal energy in 1974.<sup>109</sup> The  $\alpha$  values derived from internal-energy data by Baehr *et al.* differ from Osborne's data by about 1%.

## 4. Statistical Treatment

### 4.1. Basic Concept

In order to establish skeleton tables from the large number and variety of experimental data reported by different investigators, the uncertainty of the data must be evaluated with a common set of criteria because the different investigators have reported the uncertainty of their measurements in different ways. In addition, it is virtually impossible to evaluate, from the limited information given in the literature, all factors which cause the uncertainty of measurements, such

Table 8. Experimental studies on the caloric property of saturated water and steam

Authors	Year	Ref.	Temperature K	No. of data
Osborne/Stimson/ Ginnings	1937	105	373 -- 645	142
Osborne/Stimson/ Ginnings	1939	107	273 -- 373	256

as the effect of isotopic composition, of impurities and environmental conditions. Therefore, statistical treatment is the only possible method for treating the uncertainty of experimental data under these circumstances.

Two different types of errors, systematic error and random error, should be evaluated for the uncertainty of measurements. The random error is caused by inevitable fluctuations of experimental conditions, which cause random variations of results of repeated measurements conducted by the same apparatus and the same experimenters. The systematic error, on the other hand, shows up as the difference among results in different measuring procedures; it may be a result of uncertainty caused by limited reliability of instruments, processing of scanty experimental data, and systematic error in physical factors such as temperature and pressure.

Since systematic errors and random errors are distinctly different components of uncertainty, different treatments are necessary to analyze those two errors independently. The random error is generally assigned as a standard deviation from the correlation of an individual data set, while the systematic error is estimated as a difference (bias) between the data and the weighted average of several independent measurements performed by different methods and different experimenters.

Even though more than 10 000 specific-volume data are available for water, very few measurements are performed at the same state point; this causes difficulty in treating those data statistically. Statistical treatment requires an appropriate amount of sampling at a single condition. Hence, prior to the statistical analysis, experimental data at different state parameters, but within a limited domain, are converted into values at a common state point (grid point) with the aid of available equations of state. The procedures will be described in the succeeding sections.

#### 4.2. Error Analysis

There are 10 490 experimental specific-volume data as listed in Table 3. Some independent experimental data sets overlap in their temperature and/or pressure ranges. Due to the uncertainty of measurements, however, the different data sets give different volume values at the same temperature and pressure; this makes it necessary to analyze the uncertainty in order to obtain a most probable value with estimated reliability.

In this section the statistical treatment of experimental data for the specific volume of water will be summarized briefly. The details of this treatment have been reported in earlier publications by the present authors at Keio University.<sup>4-7</sup>

The calculation of the random and systematic errors are fairly simple. The random error at a certain grid point  $y$  is estimated as a standard deviation,  $\delta_{j,y}$ , by

$$\delta_{j,y} = \sqrt{\sum_{i=1}^n (x_{i,y} - \bar{x}_{j,y})^2 / (n - 1)}, \quad (5)$$

where  $n$  denotes the total number of the experimental data measured by a single research group,  $j$ , within a limited domain prepared for the grid point,  $y$ ;  $x_{i,y}$  denotes a single da-

tum converted into the value at the grid point with the aid of the available equation of state; and  $\bar{x}_{j,y}$  denotes the average value of  $x_{i,y}$  calculated by

$$\bar{x}_{j,y} = \sum_{i=1}^n x_{i,y} / n. \quad (6)$$

The  $\delta_{j,y}$  and  $\bar{x}_{j,y}$  are calculated at each grid point  $y$  for each data set  $j$  by Eqs. (5) and (6).

The systematic error is evaluated as a difference  $E_{j,y}$  by

$$E_{j,y} = |\bar{x}_{j,y} - \mu_{y,k}|, \quad (7)$$

where  $\mu_{y,k}$  is a weighted average, and  $k$  denotes the number of times of iteration which will be discussed below. The  $\mu_{y,k}$  is given by

$$\mu_{y,k} = \sum_{j=1}^N w_{j,y} \bar{x}_{j,y} / \sum_{j=1}^N w_{j,y}, \quad (8)$$

where  $N$  denotes the total number of data sets available at the grid point  $y$  and  $w_{j,y}$  is the weighting factor for average value of  $\bar{x}_{j,y}$ . The weighting factor  $w_{j,y}$  is defined by

$$w_{j,y} = |A \bar{x}_{j,y} / (\delta_{j,y} + E_{j,y})|, \quad (9)$$

where  $A$  is an amplitude.

In the course of the calculation,  $E_{j,y}$  and  $\mu_{y,k}$  are related to each other as given in Eqs. (7)–(9), so that an iteration procedure is required. As an initial guess  $w_{j,y}$  is derived on the basis of relative comparison of the uncertainty of experimental data claimed by the experimenters, or all of them are set equal to unity if uncertainty is not claimed. Then, the first estimate of  $\mu_{y,k=1}$  is obtained by means of Eq. (8) after which  $E_{j,y}$  and  $w_{j,y}$  are obtained by Eqs. (7) and (9), respectively. This procedure is repeated several times until the condition described below is satisfied.

The weighting factor  $w_{j,y}$  is calculated for each data set at each grid point by means of Eq. (9). When  $A$  is fixed to 0.01, the weighting factor is equivalent to the reciprocal of a sum of evaluation for percentage random error and percentage systematic error of  $\bar{x}_{j,y}$ . As an index for evaluating experimental errors of overall measurements for a single data set  $j$ , a new parameter  $\Delta_j$  is introduced:

$$\Delta_j = \sum_{y=1}^Y \frac{\delta_{j,y}}{Y} + \sum_{y=1}^Z \frac{E_{j,y}}{Z}, \quad (10)$$

where  $Y$  is the total number of  $\delta_{j,y}$  and  $Z$  is the total number of  $E_{j,y}$ , respectively. The  $\Delta_j$  is calculated for each data set and compared with the respective claimed uncertainty. The condition for terminating the iteration procedure is when most of the  $\Delta_j$  show the respective claimed uncertainty at the best relationship. There is, of course, a possibility of finding inconsistency between  $\Delta_j$  and the claimed uncertainty for some data sets in the course of this evaluation.

#### 4.3. Skeleton Tables

The overall process as to establishing skeleton tables on specific volume is summarized in a flow chart in Fig. 4. At the first step literature values of thermodynamic properties of water are collected and evaluated with respect to the claimed uncertainty, then the data sets are classified into several ranks of priority for the data source (step 2). The



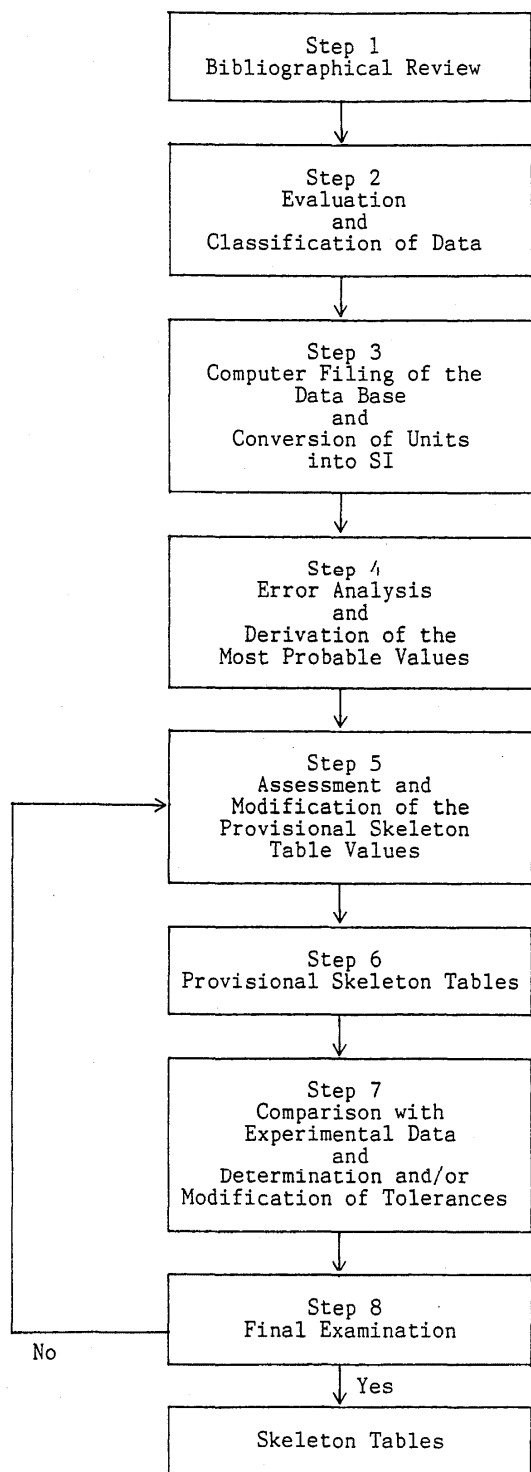


FIG. 4. Process for the establishment of the present skeleton tables.

selected data sets are stored in a computer file and then these data are converted to SI units, namely Pa for pressure, K (ITS-68) for temperature,  $\text{m}^3/\text{kg}$  for specific volume (step 3), respectively. The data sets are analyzed by the original statistical error treatment described in the preceding section (step 4).

Throughout the data processing from steps 1–4, skeleton table values are primarily determined on the basis of the experimental data. Next, the following items are investigated (step 5):

(1) Relation between determined table values and other parameters such as the critical parameters, the triple-point temperature and pressure, the thermodynamic properties at atmospheric pressure and along the saturation line, the thermodynamic properties at the ideal-gas state, second virial coefficient, etc.

(2) Relation between determined table values and the experimental data; this assessment requires equations of state as a base for comparing them.

(3) Randomness of the grid-point values which have a scatter reflecting the reliability of experimental data sources.

After the above assessment, the provisional skeleton tables are established (step 6). Finally, the reliabilities of the most probable values called “tolerances” are determined on the basis of the consistency with the experimental data and of the results of the error analysis (step 7), and all of the most probable values determined as the provisional skeleton tables are compared again with all of the available experimental data taking the associated tolerances into consideration (step 8).

The detailed procedures for the establishment of the present specific volume and the enthalpy tables are given in the following section.

## 5. Data Processing

### 5.1. Single-Fluid Phase State

#### 5.1.a. Specific Volume

The actual data processing for establishing the present skeleton tables is described in this section. The data with an asterisk in Table 3 and 231 specific-volume values derived by Chen *et al.*<sup>85</sup> from speed-of-sound data are the data used to establish the present specific-volume skeleton table in the single-fluid-phase state. The distribution of these data is shown in Figs. 1 and 2. The data reported by Hanafusa *et al.* in 1984<sup>104</sup> were only used in the process after step 5 of the flow chart in Fig. 4, because they were published after the establishment of the most probable values at step 4. Therefore, 6713 data points become the data base in the statistical treatment at step 4.

Figure 5 shows five distinct subregions of statistical

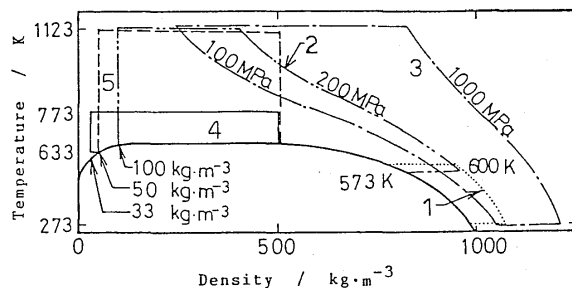


FIG. 5. Five subregions for the error analysis of the experimental specific-volume data.

treatment in accordance with the difference of pressure dependence of specific volume. The subregion 1 in Fig. 5 is prepared for liquid phase; subregion 2 for supercritical-fluid phase; subregion 3 for high-pressure phase; subregion 4 for critical region; and subregion 5 for single-fluid phase at high temperatures.

In subregions 1, 2, and 3, the errors in specific-volume values were analyzed as a function of temperature and pressure, whereas the errors in pressure values were analyzed as a function of temperature and specific volume in subregions 4 and 5. The experimental data were converted into the grid-point values by the equation of state developed by Pollak<sup>111</sup> in subregions 1, 2, 4, and 5, whereas by the equation of state developed by Jůza<sup>35</sup> in subregion 3.

The evaluated errors for the specific-volume values are given in Table 3, which were calculated by Eq. (10). The evaluated pressure errors in subregions 4 and 5 have been given in a previous publication.<sup>4</sup>

The size of a domain prepared for a grid point was chosen case by case according to the distribution of data points and the behavior of the thermodynamic state surface, namely, how strongly specific volume depends on temperature and pressure or how strongly pressure depends on temperature and specific volume. The domains were overlapped with each other as widely as possible in order to get smoother behavior among grid-point values.

The result and some detailed discussion of the error analysis have been presented by Sato *et al.*,<sup>4</sup> and the original most probable values obtained directly by the present error analysis are summarized in Tables 2 and 3 of a previous publication.<sup>7</sup>

### 5.1.b. Enthalpy

Regarding the enthalpy of water in the single-fluid phase, only 464 experimental data in seven references<sup>93-99</sup> are available as mentioned in Sec. 3.1.b. Due to the scarcity of enthalpy data, the statistical method used for establishing the specific-volume table can not be applied to the case of enthalpy.

The enthalpy table was constructed on the basis of derived values from four equations of state of water, namely, the equation developed by Pollak in 1974,<sup>111</sup> the equation developed by Haar, Gallagher, and Kell,<sup>112</sup> whose equation was accepted as IAPS-84,<sup>28</sup> and two independent equations developed by Sato *et al.* in 1981<sup>113</sup> and in 1985.<sup>91</sup> The reliabilities of those equations were carefully examined on the basis of the present specific-volume table and by comparing them with experimental data regarding specific volume, heat capacity, and speed of sound, so on.<sup>8,9</sup> These four equations agree well with the present specific-volume table values and with experimental data in most of the respective ranges except at high pressures along the isotherm of 273 K. The discrepancies among the derived values regarding specific volume, enthalpy, speed of sound, and heat capacity at constant pressure along the 273 K isotherm are listed in Table 9.

Enthalpy values calculated from the equations of state are to be preferred over available experimental data in case of water. That good equations of state can reliably predict en-

Table 9. Discrepancies among derived thermodynamic property values from four equations of state; equation developed by Pollak, IAPS-84, and two equations developed by Sato *et al.*, along 273 K isotherm

Property	Pressure		
	100 MPa	200 MPa	300 MPa
Specific volume	0.012 %	0.27 %	1.0 %
Enthalpy	0.7 %	0.3 %	2.2 %
Speed of sound	0.7 %	9 %	20 %
Heat capacity, $C_p$	2.8 %	7 %	15 %

thalpy values, is apparent from the excellent agreement of thermodynamic surfaces fitted to specific-volume data and other thermodynamic property data such as the heat capacity at constant pressure data of Sirota *et al.*<sup>114-126</sup> For example, in the case of the enthalpy data of Havlicek and Miškovský<sup>93</sup> on the 473.15 K isotherm, where the three equations agree to within  $\pm 0.05\%$  but differ from the data by more than 0.4% as shown in Fig. A.III.9a in Appendix III, we have given preference to the equations.

The tolerances for the enthalpy values at pressures below 100 MPa were determined by taking the consistency of the experimental data and the agreement among the four equations into consideration. The tolerances above 100 MPa were determined from the analysis of three equations excluding the equation by Pollak. The detailed discussions have been reported in another publication<sup>9</sup> and the reliability of each equation of state will be discussed in Sec. 9.2. Comparison of the skeleton table values with available experimental data and four equations is given schematically along 24 isotherms in Appendix III.

### 5.2. Saturation State

The skeleton table values at the saturation state were calculated by the equations for the vapor pressure, densities of saturated water and steam, and the caloric property  $\alpha$  from which the enthalpy values of saturated water and steam were derived by using relations of Eqs. (2)–(4) as previously described in Sec. 3.2. These equations are given in the supplementary release<sup>15</sup> issued by IAPS.

In order to obtain these equations, Wagner and Saul<sup>13</sup> and Saul and Wagner<sup>14</sup> applied an optimization method developed by Ewers and Wagner.<sup>127,128</sup> All equations have been fitted to the data by weighted least squares according to the method of maximum likelihood by Saul and Wagner.<sup>14</sup> The variance of the data from their respective equations is the basis for evaluating the tolerance. Each equation covers the entire range of the vapor-liquid equilibrium and represents the experimental data within the claimed uncertainty. More detailed discussions have been given by Saul and Wagner.<sup>14</sup>

## 6. Common Requirements

### 6.1. Critical Point

#### 6.1.a. Temperature, Pressure, and Density

The values of critical temperature, critical pressure, and critical density of water which have been given in a 1983 IAPS Statement,<sup>30</sup> have been determined on the basis of international cooperative study conducted by Levelt Sengers, Straub, Watanabe, and Hill.<sup>83</sup> We adopted these values for the most probable values of present skeleton steam tables at the critical point.

#### 6.1.b. Enthalpy

The enthalpy values at the saturation state above 373 K were determined on the same data base as for IST-63, since no essential experimental data had been accumulated since then except the internal energy data by Baehr *et al.* In the course of redetermination of the enthalpy at the critical point, not only the effect of replacement of the temperature scale from IPTS-48 to IPTS-68, but also the effect of the newly determined critical parameters were taken into consideration.

### 6.2. Saturation State

#### 6.2.a. Triple Point

The temperature of the triple point of water, 273.16 K, is defined as the fundamental standard of IPTS-68. The internal energy and the entropy of saturated water at the triple point are assigned a value of zero as adopted at the fifth ICPS in London, 1956. The triple-point pressure was measured very precisely by Guildner *et al.* in 1976.<sup>103</sup> They proposed  $611.657 \pm 0.010$  Pa.

#### 6.2.b. Boiling Point

The normal boiling point is defined as being 373.15 K in the current standard, IPTS-68. On the other hand, it should be remembered that there exists a temperature difference between the IPTS-68 and the thermodynamic temperature. Guildner and Edsinger have reported the thermodynamic temperature of the boiling point of water as being 373.1248 K with the random error of  $\pm 0.0018$  K and the systematic error of  $\pm 0.00054$  K in 1976.<sup>129</sup>

#### 6.2.c. Clapeyron's Equation

The relation among temperature, vapor pressure, specific volume, and enthalpy at the saturated state must satisfy Clapeyron's equation. In the present skeleton tables, this thermodynamic consistency is assured, since the most probable values for the enthalpy at the saturated state were derived from the vapor pressure, and the densities of saturated water and saturated steam as discussed in Sec. 5.2.

### 6.3. Single-Fluid Phase State

#### 6.3.a. Second Virial Coefficient

The study performed by Le Fevre *et al.* about the second virial coefficient of water in 1975<sup>130</sup> is reliable. The most probable specific-volume values at pressures below 2.5 MPa

have been determined by the careful consideration of Le Fevre's second virial coefficient.

#### 6.3.b. Precise Data at Atmospheric Pressure

Very precise experimental data for the thermodynamic properties of liquid water at atmospheric pressure are available as described in Sec. 3.1. Some of such precise experimental data are reported by Gildseth *et al.* in 1972,<sup>86</sup> and by Del Grosso in 1970<sup>88</sup> and Del Grosso and Mader in 1972.<sup>89</sup> Sato *et al.*<sup>91</sup> proposed an equation of state for representing these experimental data precisely which is effective in the temperature range from 273 to 423 K. The most probable values in the present skeleton tables both for the specific volume and enthalpy at atmospheric pressure agree with Sato's equation within their associated tolerances in the temperature range between 273 and 373 K. This fact proves the good relationship between the most probable values and the precise experimental data at atmospheric pressure.

## 7. Skeleton Tables

The present skeleton tables were adopted as "The IAPS Skeleton Tables 1985 for the Thermodynamic Properties of Ordinary Water Substance (IST-85)." The IST-85 is reproduced in Appendix I.

The IST-85 consists of two parts, one is for the single-fluid phase state and the other is for the saturation state. Part I of IST-85 contains two skeleton tables. Table 1 (IST-85) gives the most probable specific-volume values with their associated tolerances in the temperature range from 273.15 to 1073.15 K and pressure range up to 1 GPa, whereas Table 2 (IST-85) gives the most probable enthalpy values with their associated tolerances in the same range as that of the specific-volume table. The boundary line between liquid water and steam is indicated, beginning at 398.15 K and 101.325 kPa and disappears at 623.15 K and 15 MPa. No entries are given in the range of the solid phase at the pressures above 650 MPa along the 273.15 K isotherm and above 900 MPa along the 298.15 K isotherm. Part II of IST-85 contains skeleton table of thermodynamic properties at the saturation state of water. Table 3 (IST-85) gives the most probable thermodynamic property values with their associated tolerances for the coexisting vapor-liquid phases between the triple point and the critical point.

## 8. Comparisons

### 8.1. Single-Fluid Phase State

#### 8.1.a. Specific Volume

Complete comparison of the most probable specific-volume values with the essential experimental data and five equations of state for water, namely, IFC-67,<sup>18</sup> Pollak's equation,<sup>111</sup> Sato's equations<sup>91,113</sup> and IAPS-84,<sup>28</sup> is shown in Appendix II. Percent deviation,  $\Delta v$ , is calculated by the following equation:

$$\Delta v = 100(v - v_{\text{cal}})/v_{\text{cal}}, \quad (11)$$

where  $v$  is the experimental or derived specific-volume value including the most probable value and  $v_{\text{cal}}$  is the IAPS-84

value. The experimental data plotted in the figures of Appendix II are reported at temperatures within  $\pm 1$  K around the nominal temperature. The top figures are plotted on a logarithmic pressure scale, whereas the bottom figures are plotted on an ordinary pressure scale up to 1 GPa.

Regarding the specific volumes of liquid water in the pressure range below 200 MPa (Figs. A.II.1a–12a), the experimental data by Kell *et al.*<sup>70–72</sup> and the data by Chen *et al.*<sup>85</sup> are the most precise data. The most probable specific-volume values agree with those data completely within a few tenths of the associated tolerances.

For the superheated steam, the data measured by Kell<sup>70</sup> and by Keyes *et al.*<sup>44</sup> deviate from the most probable values beyond the tolerance at 573.15 and 623.15 K (Figs. A.II.11a and 12a).

In the pressure range above 200 MPa (Figs. A.II.1b–24b), the experimental data reported by Jůza *et al.*,<sup>53</sup> Vedam and Holton,<sup>65</sup> Borzunov *et al.*,<sup>66</sup> Grindley and Lind,<sup>67</sup> Hilbert *et al.*,<sup>78</sup> Tanishita *et al.*,<sup>61</sup> and Zubarev *et al.*,<sup>75,76</sup> are the major sources of information. The most probable values agree with those data within their tolerances. The experimental data reported by Maier and Franck,<sup>93</sup> Köster and Franck,<sup>64</sup> and Burnham *et al.*<sup>77</sup> are measured over a wide temperature and pressure range with an uncertainty of about  $\pm 1\%$  in specific volume. The most probable values are larger than most of the data reported by Maier and Franck and Köster and Franck (see, e.g., Figs. A.II.9b–12b), but, on the other hand, they are smaller than the data reported by Burnham *et al.* (see, e.g., Figs. A.II.13b).

### 8.1.b. Enthalpy

The complete comparison of the most probable enthalpy values with the essential experimental data and five equations of state is shown in Appendix III. The percent deviation  $\Delta h$  is calculated by the following equation:

$$\Delta h = 100(h - h_{\text{cal}})/h_{\text{cal}}, \quad (12)$$

where  $h$  is the experimental or derived enthalpy value including the most probable value and  $h_{\text{cal}}$  is the IAPS-84 enthalpy value. The temperature range of the experimental

data plotted in the figures is  $\pm 1$  K around the nominal temperature.

As described in Sec. 5.1.b., the most probable enthalpy values are determined from the equation developed by Polak, IAPS-84, and two independent equations developed by Sato *et al.*

In most of the range up to 973 K and below 200 MPa (Figs. A.III.5a–22a), the differences among the four equations of state are smaller than the scatter among the experimental data. Since some of these equations of state have been developed on the basis of not only the precise specific-volume data but also the experimental heat capacity and speed-of-sound data, they agree with each other very well. This agreement justifies small tolerances assigned to the most probable enthalpy values in comparison with discrepancies among experimental data.

### 8.2. Saturation State

The comparison of the equation for the vapor pressure with experimental data is shown in Fig. 6. The experimental data reported by Stimson<sup>102</sup> between 298 and 373 K and those reported by Osborne *et al.*<sup>100</sup> between 373 and 647 K have been used to determine the associated tolerances.

The comparison of the equation of the saturated water density with experimental data is shown in Fig. 7. The tolerances of the most probable specific volumes between 273 and 423 K are determined from 10 to 30 ppm as shown in the lower plot in Fig. 7. The tolerance of specific volume of saturated steam includes all of the derived data reported by Osborne *et al.*<sup>105,107</sup> as shown in Fig. 8.

As described in Sec. 5.2., the enthalpy values for saturated water and saturated steam were calculated by Eqs. (2)–(4). The enthalpy values were determined on the basis of  $\alpha$ -values measured by Osborne *et al.*<sup>105,107</sup> These  $\alpha$ -values are plotted in Fig. 9. Osborne's data agree with the equation within  $\pm 0.07\%$  up to 373 K and  $\pm 0.3\%$  above 373 K. The tolerances for enthalpy values of saturated water and saturated steam were decided so as to include the majority of Osborne's  $\alpha$ -data and those tolerances are shown in Figs. 10 and 11, respectively.

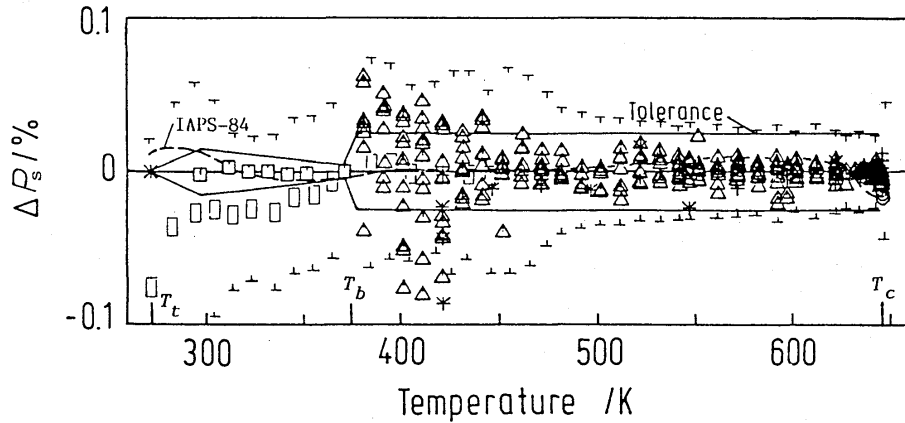


Fig. 6. Percent deviations of the vapor pressure values from the equation developed by Wagner and Saul. The data measured by Osborne et al. ( $\Delta$ ), Stimson ( $\square$ ), Guildner et al. ( $*$ ), Rivkin et al. ( $+$ ), Kell et al. ( $\times$ ), Hanafusa et al. ( $\circ$ ) and the values of the International Skeleton Steam Tables, 1963 ( $\square$ ) and the associated tolerances ( $\mp$ ,  $\pm$ ) are shown.  $T_t$ ,  $T_b$ , and  $T_c$  are the triple, boiling, and critical points of water, respectively.

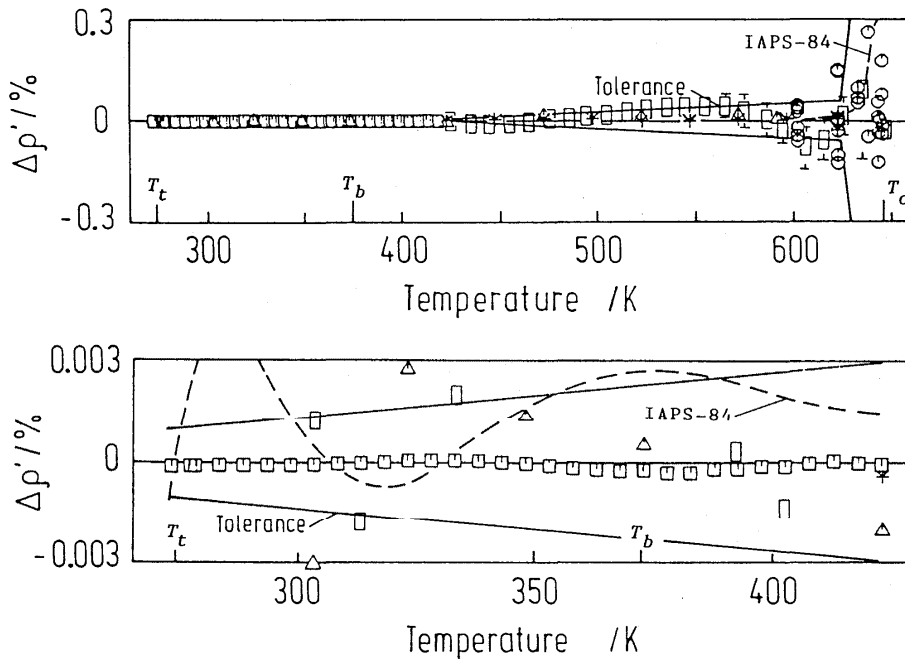


Fig. 7. Percent deviations of the density values of saturated water from the equation developed by Wagner and Saul. The data measured by Smith and Keyes ( $\Delta$ ), Kell et al. ( $\times$ ), Osborne et al. ( $\circ$ ), Kell ( $\square$ ) and the values of the International Skeleton Steam Tables, 1963 ( $\square$ ), and the associated tolerances ( $\mp$ ,  $\pm$ ) are shown.  $T_t$ ,  $T_b$ , and  $T_c$  are the triple, boiling, and critical points of water.

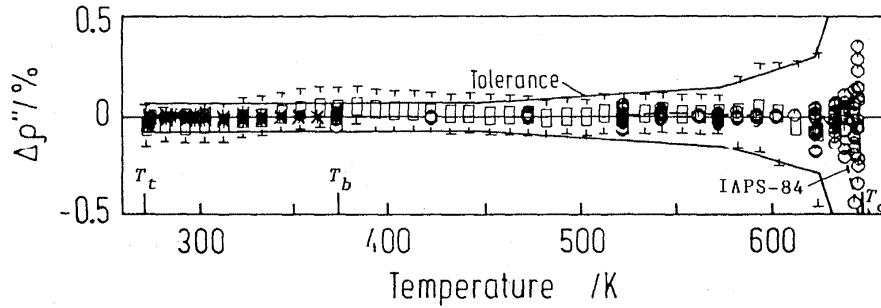


Fig. 8. Percent deviations of the density values of saturated steam from the equation developed by Wagner and Saul. The data measured by Osbourne et al. in 1937( $\odot$ ) and in 1939( $\ast$ ), and the values of the International Skeleton Steam Tables, 1963( $\square$ ), and the associated tolerances ( $\tau, \pm$ ) are shown. The  $T_t$ ,  $T_b$ , and  $T_c$  are the triple, boiling, and critical points of water, respectively.

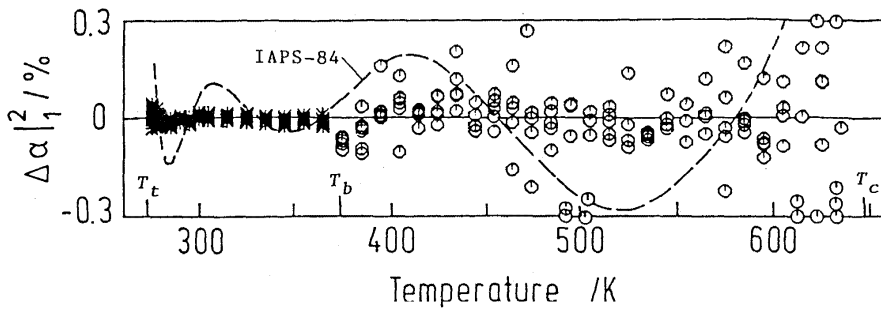


Fig. 9. Percent deviations of the  $\Delta\alpha_1^2$  values,  $\alpha$  increments between temperatures  $T_1$  and  $T_2$ , measured by Osbourne et al. in 1937( $\odot$ ) and in 1939( $\ast$ ) from the equation developed by Wagner and Saul. The data points are plotted at the lower temperature  $T_1$ .  $T_t$ ,  $T_b$ , and  $T_c$  are the triple, boiling, and critical points of water, respectively.

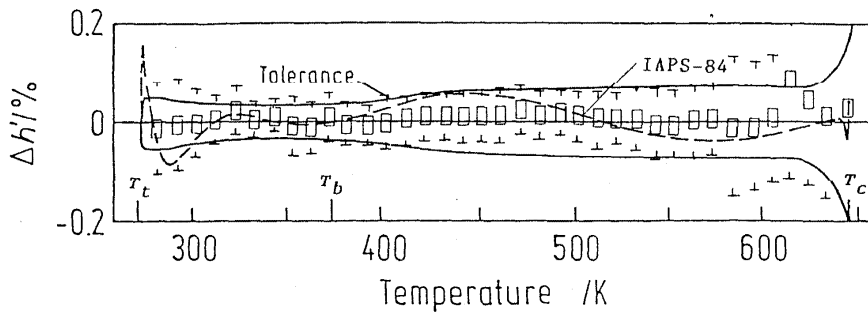


Fig. 10. Comparison of the derived enthalpy values of saturated water from IAPS-84 and the values of the International Skeleton Steam Tables, 1963 ( $\square$ ), and the associated tolerances ( $\tau, \pm$ ) with the present skeleton-table values.  $T_t$ ,  $T_b$ , and  $T_c$  are the triple, boiling, and critical points of water, respectively.

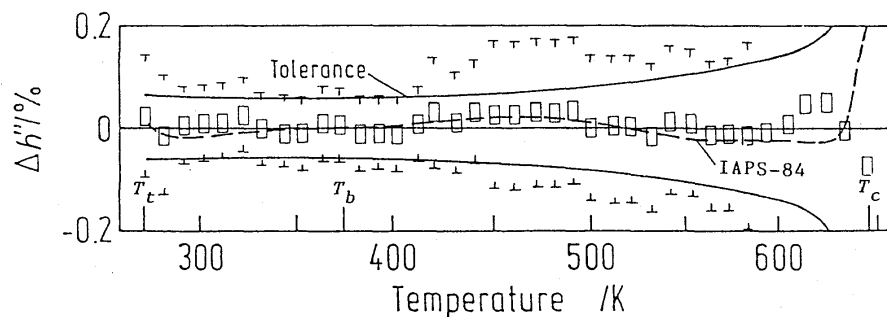


Fig. 11. Comparison of the derived enthalpy values of saturated steam from IAPS-84 and the values of the International Skeleton Steam Tables, 1963 ( $\square$ ), and the associated tolerances ( $\tau, \pm$ ) with the present skeleton-table values.  $T_t$ ,  $T_b$ , and  $T_c$  are the triple, boiling, and critical points of water, respectively.

## 9. Discussions

### 9.1. Tolerance of IST-85

The distribution of percent tolerance of IST-85 on the pressure-temperature plane is shown in Figs. 12 and 13 for the specific volume and enthalpy, respectively. Figures 12 and 13 consist of many grids corresponding to state points defined at the present skeleton tables, i.e., 24 temperatures and 61 pressures are given in the respective coordinates. Most of the tolerances both for specific volume and for enthalpy except for the 273.15 K isotherm are less than  $\pm 2\%$

and they are less than  $\pm 0.5\%$  at lower pressures below 200 MPa. Especially in the liquid phase up to 423 K and 100 MPa both tolerances for the specific volume and for enthalpy are smaller than those given in other regions.

The tolerance for specific volume in liquid water below 423.15 K and in the super-critical region above 25 MPa between 573 and 723 K is smaller than that of the former international skeleton steam tables, IST-63, about by the order of magnitude of 2 or 3. The tolerance for enthalpy in the critical region and super-critical region above 12.5 MPa between 648.15 to 773.15 K is also smaller than that of IST-63.

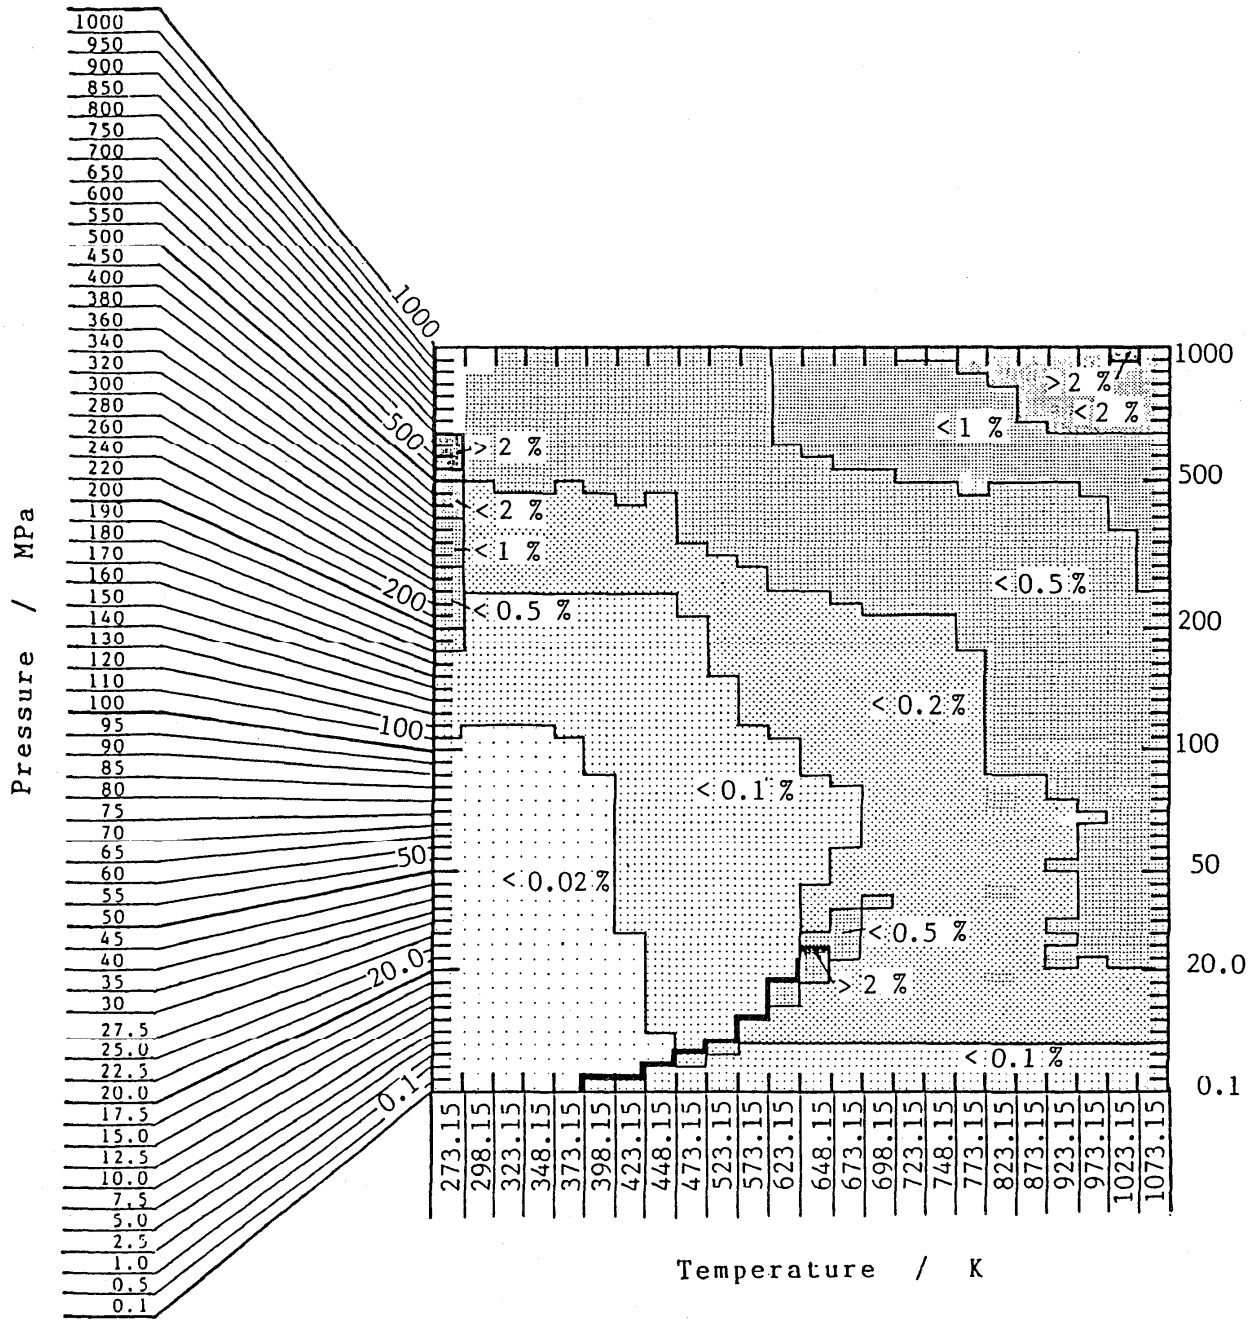


FIG. 12. Percent tolerance for the specific-volume values of the present skeleton tables.



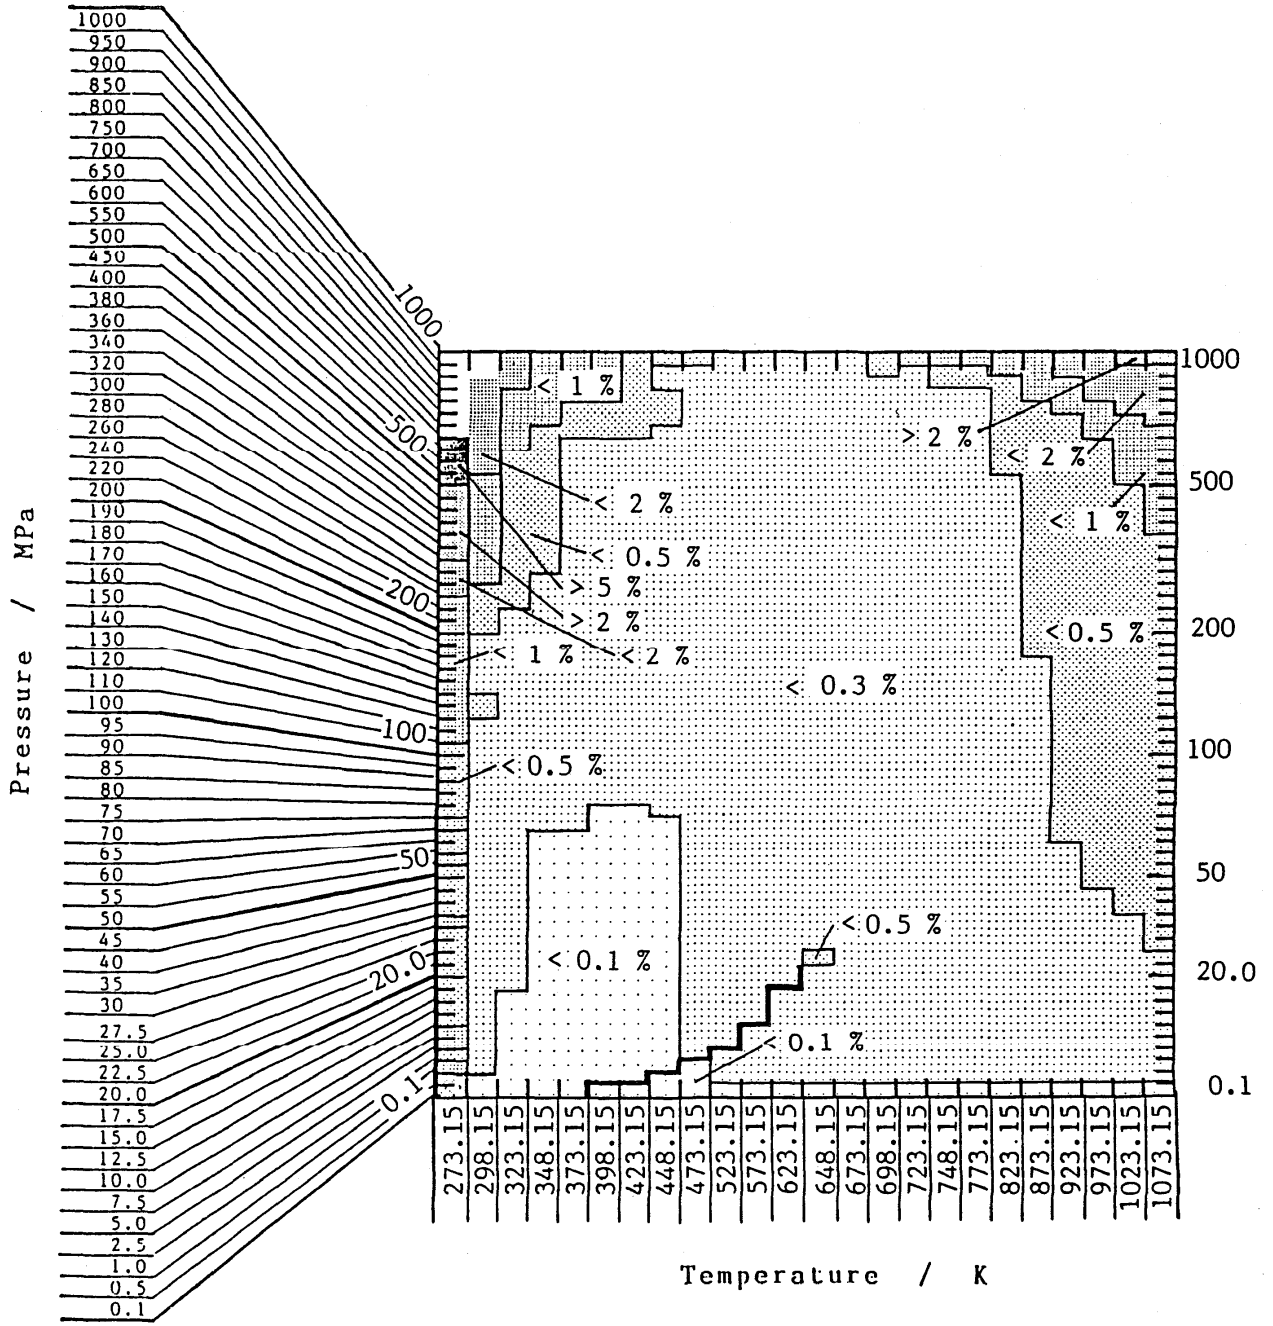


FIG. 13. Percent tolerance for the enthalpy values of the present skeleton tables.

## 9.2. Discussions of Skeleton Tables and Equations of State

### 9.2.a. IST-63

Figures 14–25 show comparisons of IST-63, IFC-67,<sup>18</sup> IAPS-84,<sup>28</sup> the equation of state developed by Pollak,<sup>111</sup> and equations of state developed by Sato *et al.*<sup>91,113</sup> with IST-85 both for specific volume and enthalpy by using the same coordinates as Figs. 12 and 13. The area, where the property values differ from the present skeleton table values beyond the associated tolerance, is shown by crosshatch. The area where the property values are smaller than the present skeleton table values is shadowed and the rest is the area where the property values are greater than the present skeleton table values.

Many specific-volume values of IST-63 differ from the present skeleton table values beyond the tolerance as shown in Fig. 14 and figures of Appendix II (see Figs. A.II.12a–22a). The deviations of specific-volume values of IST-63 from those of the present skeleton table values are prominent in the super-critical region between 623 and 973 K with the maximum deviation of 3.3 times as much as the associated tolerance. This fact reflects the considerable accumulation of new reliable experimental data in the last two decades.

On the other hand, most of the enthalpy values of IST-63 agree with the present skeleton table values except at high pressures between 648 and 723 K as shown in Fig. 15 and in figures of Appendix III.

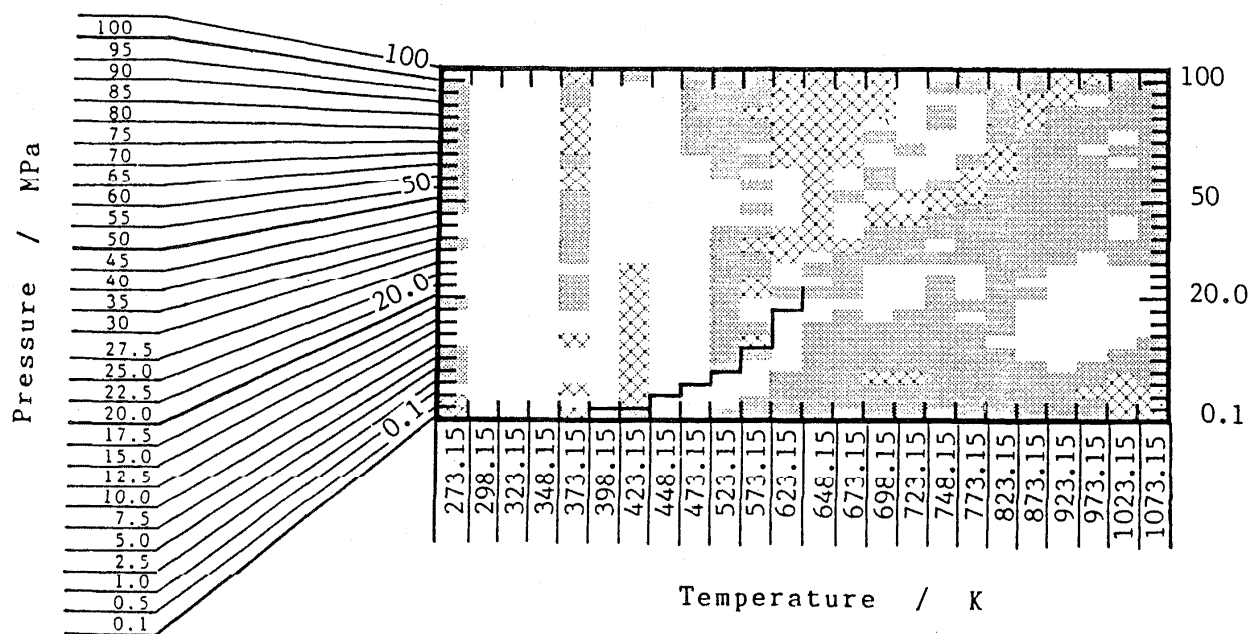


FIG. 14. Comparison of IST-63 specific-volume values with the present skeleton table values (IST-85). The area where the deviations of IST-63 values from IST-85 values are greater than the IST-85 tolerances is shown by crosshatch. The area where IST-63 values are larger than IST-85 values is shown by □. The area where IST-63 values are smaller than IST-85 values is shown by ■.

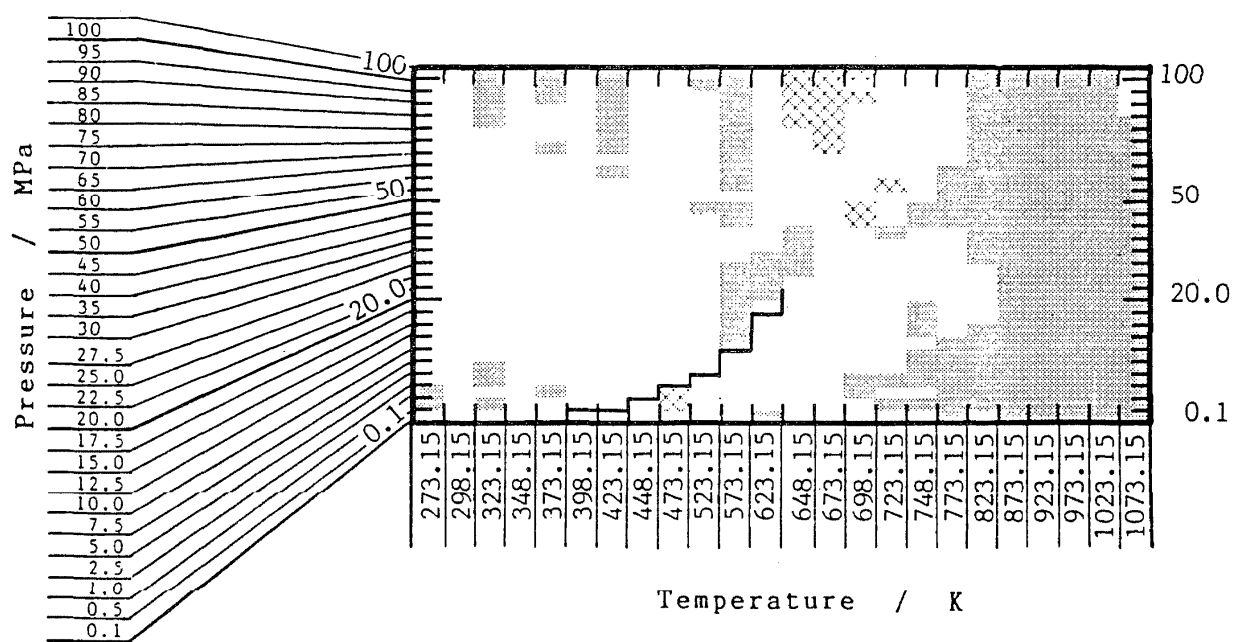


FIG. 15. Comparison of IST-63 enthalpy values with the present skeleton table values (IST-85). The area where the deviations of IST-63 values from IST-85 values are greater than IST-85 tolerances is shown by crosshatch. The area where IST-63 values are larger than IST-85 values is shown by  $\square$ . The area where IST-63 values are smaller than IST-85 values is shown by  $\blacksquare$ .

#### 9.2.b. IFC-67

Although IFC-67<sup>18</sup> is still effective for industrial use on the authorization of IAPS, the IFC-67 does not reproduce the specific-volume values of the present skeleton tables within the tolerance at many places. Many specific-volume values derived from IFC-67 differ from the present skeleton

table values in the liquid water below 423 K and in the supercritical region between 623 and 973 K as shown in Fig. 16 and in figures of Appendix II.

On the other hand, enthalpy values derived from IFC-67 agree with the present skeleton table values except those at the temperatures between 623 and 723 K as shown in Fig. 17 and figures of Appendix III.

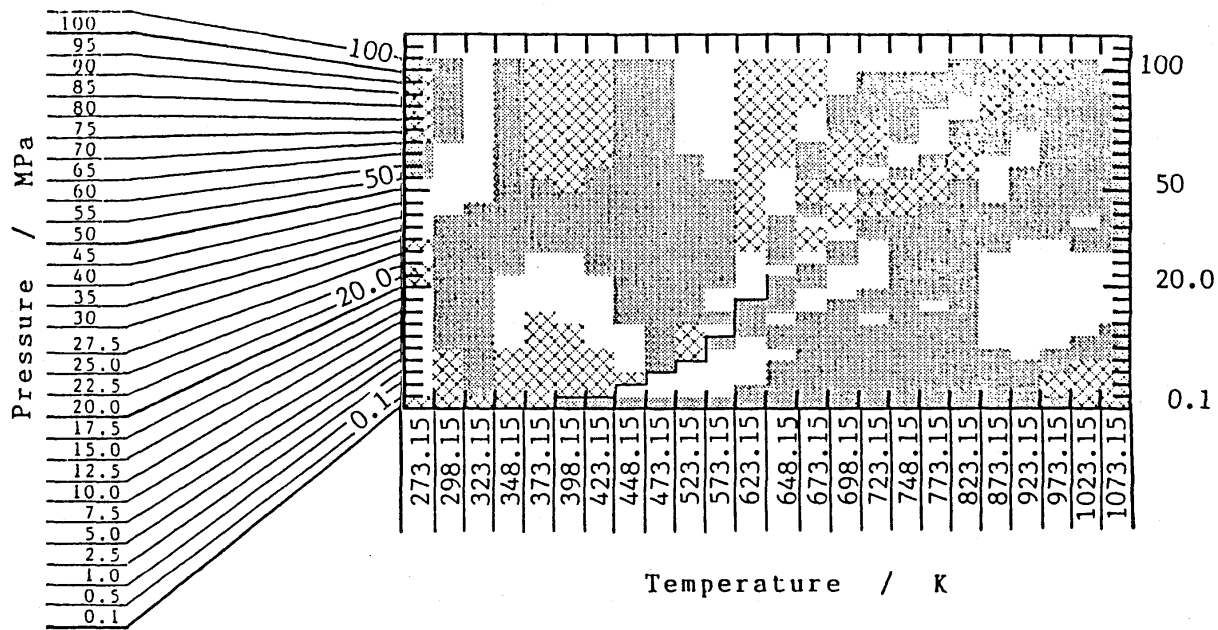


FIG. 16. Comparison of IFC-67 specific-volume values with the present skeleton table values (IST-85). The area where the deviations of IFC-67 values from IST-85 values are greater than the IST-85 tolerances is shown by crosshatch. The area where IFC-67 values are larger than IST-85 values is shown by □. The area where IFC-67 values are smaller than IST-85 values is shown by ■.

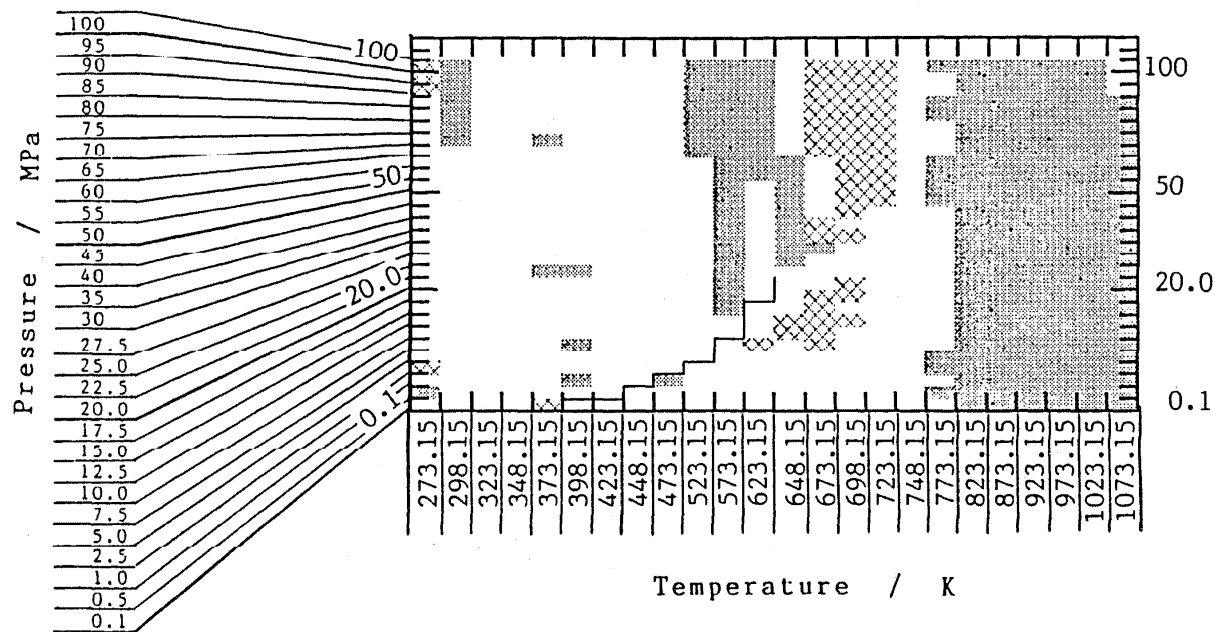


FIG. 17. Comparison of IFC-67 enthalpy values with the present skeleton table values (IST-85). The area where the deviations of IFC-67 values from IST-85 values are greater than the IST-85 tolerances is shown by crosshatch. The area where IFC-67 values are larger than IST-85 values is shown by □. The area where IFC-67 values are smaller than IST-85 values is shown by ■.

## 9.2.c. IAPS-84

The specific-volume values derived from IAPS-84<sup>28</sup> agree with the present skeleton table values very well in most of the regions covering temperatures 273 to 1073 K and pressures 0.1 MPa to 1 GPa except the specific volume in the

range of temperatures above 923 K and pressures between 5 and 27.5 MPa as shown in Fig. 18 and in figures of Appendix II.

The enthalpy values of IAPS-84 agree completely with the present skeleton table values within the tolerance as shown in Fig. 19 and in figures of Appendix III.

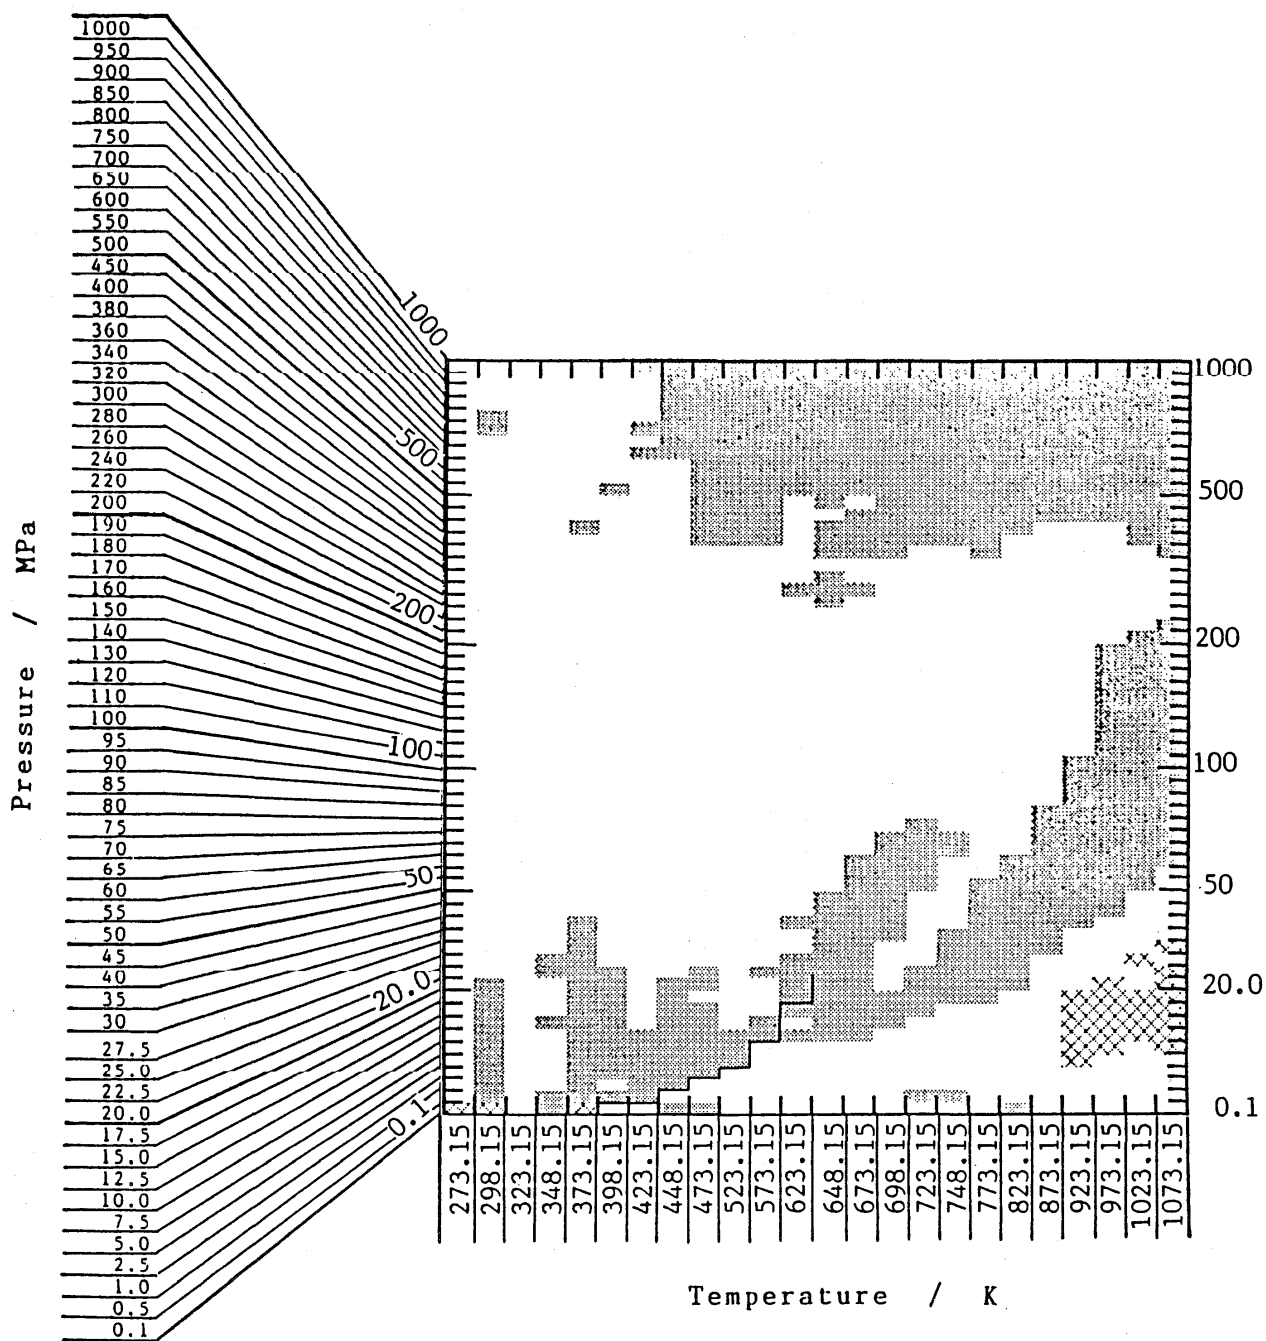


FIG. 18. Comparison of IAPS-84 specific volume values with the present skeleton table values (IST-85). The area where the deviations of IAPS-84 values from IST-85 values are greater than the IST-85 tolerances is shown by crosshatch. The area where IAPS-84 values are larger than IST-85 values is shown by □. The area where IAPS-84 values are smaller than IST-85 values is shown by ■.

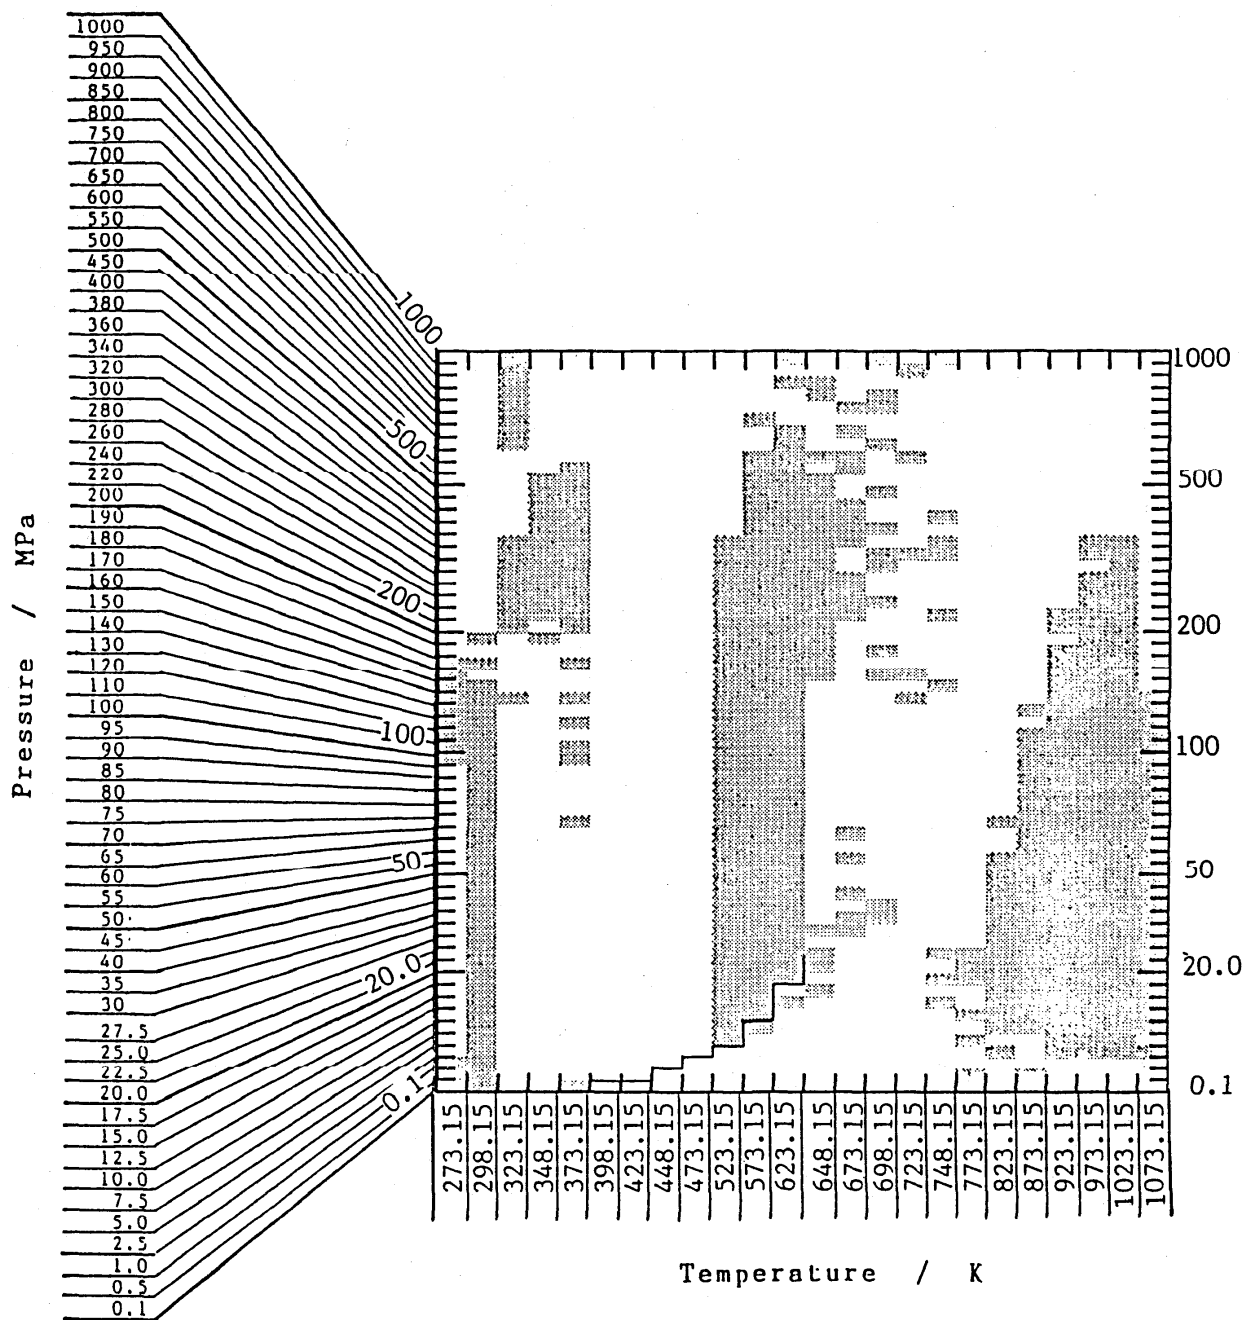


FIG. 19. Comparison of IAPS-84 enthalpy values with the present skeleton table values (IST-85). The area where the deviations of IAPS-84 values from IST-85 values are greater than the IST-85 tolerances is shown by crosshatch. The area where IAPS-84 values are larger than IST-85 values is shown by □. The area where IAPS-84 values are smaller than IST-85 values is shown by ■.

## 9.2.d. Equation Developed by Pollak

The specific-volume values derived from the equation of Pollak<sup>111</sup> are getting smaller with increasing pressure than the present skeleton table values in most of the effective region up to 300 MPa as shown in Fig. 20 and figures of Appendix II. The maximum deviation is about twice as much as

the associated tolerance at 573 K and 300 MPa as shown in Fig. A.II.11b.

On the other hand, the enthalpy values derived from the equation of Pollak agree with the present skeleton table values in most of the effective region except only for a few grid points at high pressures at 298 and 1073 K as shown in Fig. 21 and in figures of Appendix III.

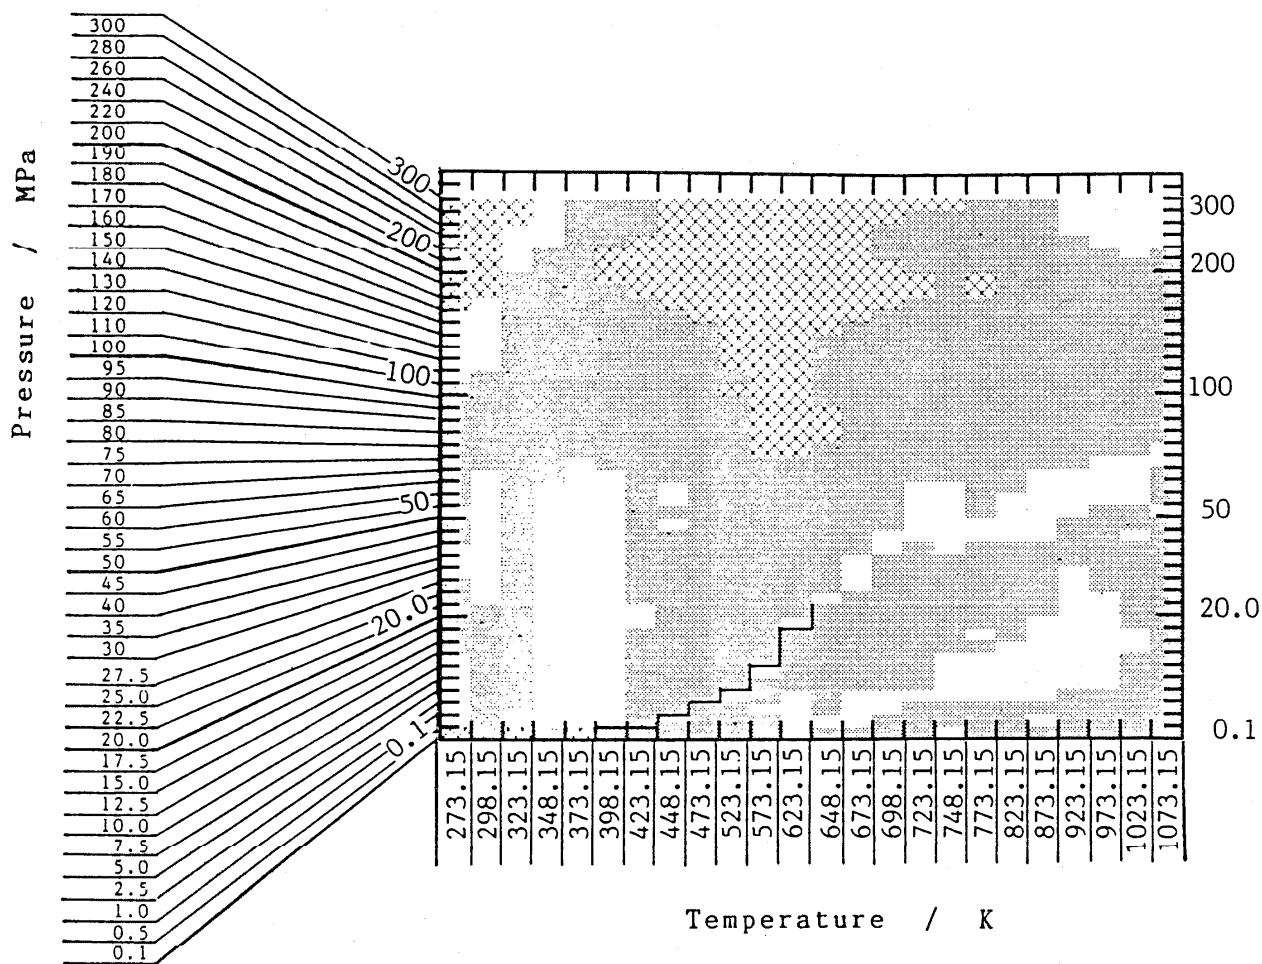


FIG. 20. Comparison of the specific-volume values derived from the equation developed by Pollak with the present skeleton table values (IST-85). The area where the deviations of Pollak-values from IST-85 values are greater than the IST-85 tolerances is shown by crosshatch. The area where Pollak values are larger than IST-85 values is shown by □. The area where Pollak values are smaller than IST-85 values is shown by ■.

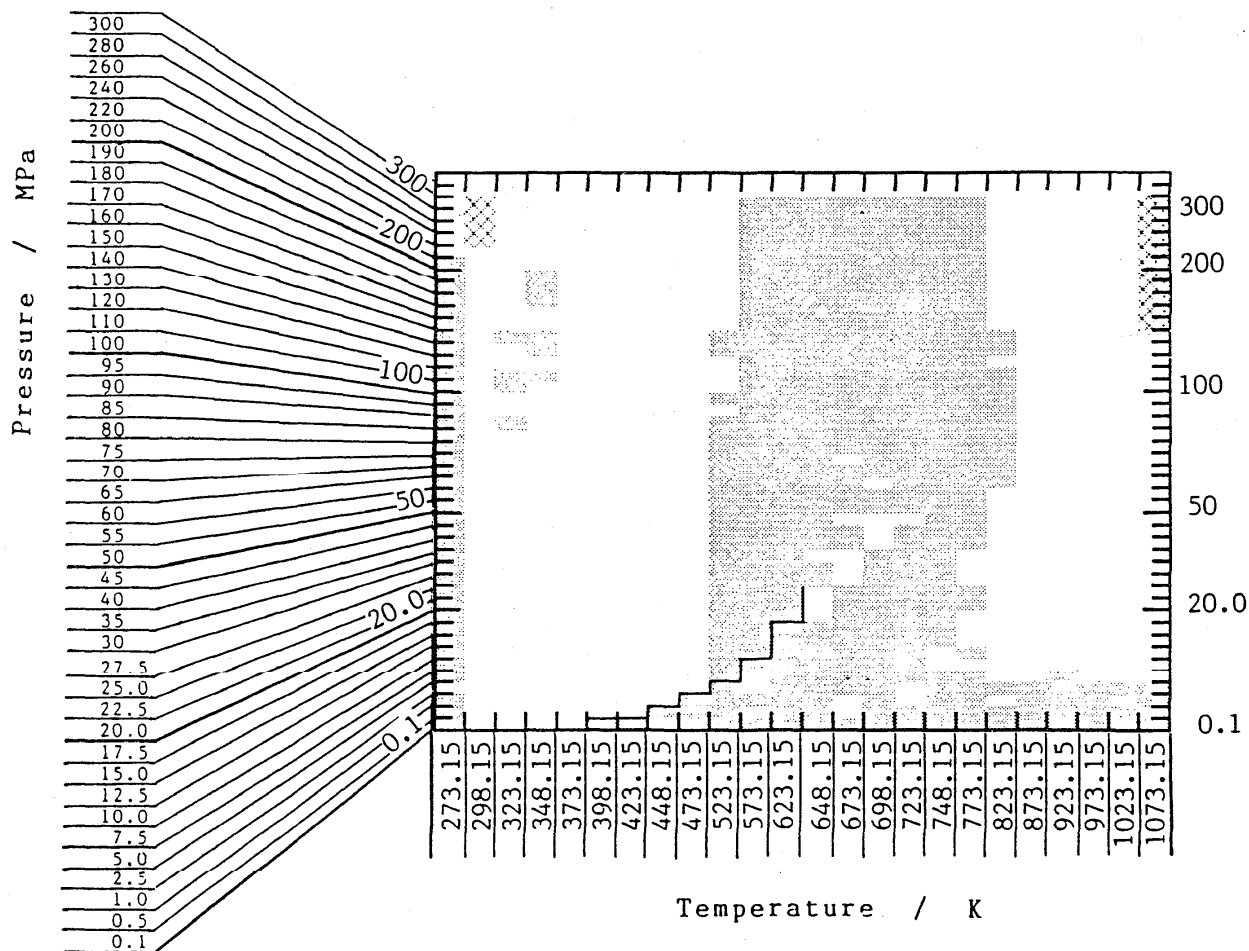


FIG. 21. Comparison of the enthalpy values derived from the equation developed by Pollak with the present skeleton table values (IST-85). The area where the deviations of Pollak values from IST-85 values are greater than the IST-85 tolerances is shown by crosshatch. The area where Pollak values are larger than IST-85 values is shown by  $\square$ . The area where Pollak values are smaller than IST-85 values is shown by  $\blacksquare$ .

#### 9.2.e. Equations Developed by Sato *et al.*

An equation (SUWH) developed by Sato, Uematsu, and Watanabe in 1981<sup>113</sup> is effective for liquid water between 0.1 MPa and 1 GPa in the temperature range from 273 to 623 K as well as between 0.1 and 1 GPa in the temperature range from 623 to 1073 K. The specific-volume values derived from SUWH agree with the present skeleton table values within the associated tolerances except for two points at atmospheric pressure and seven points at high pressures as shown in Fig. 22 where the differences are of nearly the same magnitude as the associated tolerances as shown in figures of Appendix II.

On the other hand, the enthalpy values derived from SUWH agree with the present skeleton table values almost completely within the associated tolerances except for a single point at 298 K and 750 MPa as shown in Fig. 23 where

the difference is about the same as the tolerance as shown in figures of Appendix III.

Another equation (SUWL) developed by Sato, Uematsu, and Watanabe<sup>91</sup> has been introduced in Sec. 3.1.a, which is effective in the range of temperatures 273 to 423 K and pressures up to 1 GPa. The SUWL reproduces the present specific-volume values at atmospheric pressure within the associated tolerances. The derived specific-volume values agree with the present skeleton table values within their associated tolerances in the whole effective range except for four points above 850 MPa at 423 K as shown in Fig. 24 and figures of Appendix II, whereas the derived enthalpy values agree with the present skeleton table values almost completely within their associated tolerances except for a single point at 423 K and 1 GPa as shown in Fig. 25 where the difference is about the same order as the associated tolerance as shown in figures of Appendix III.



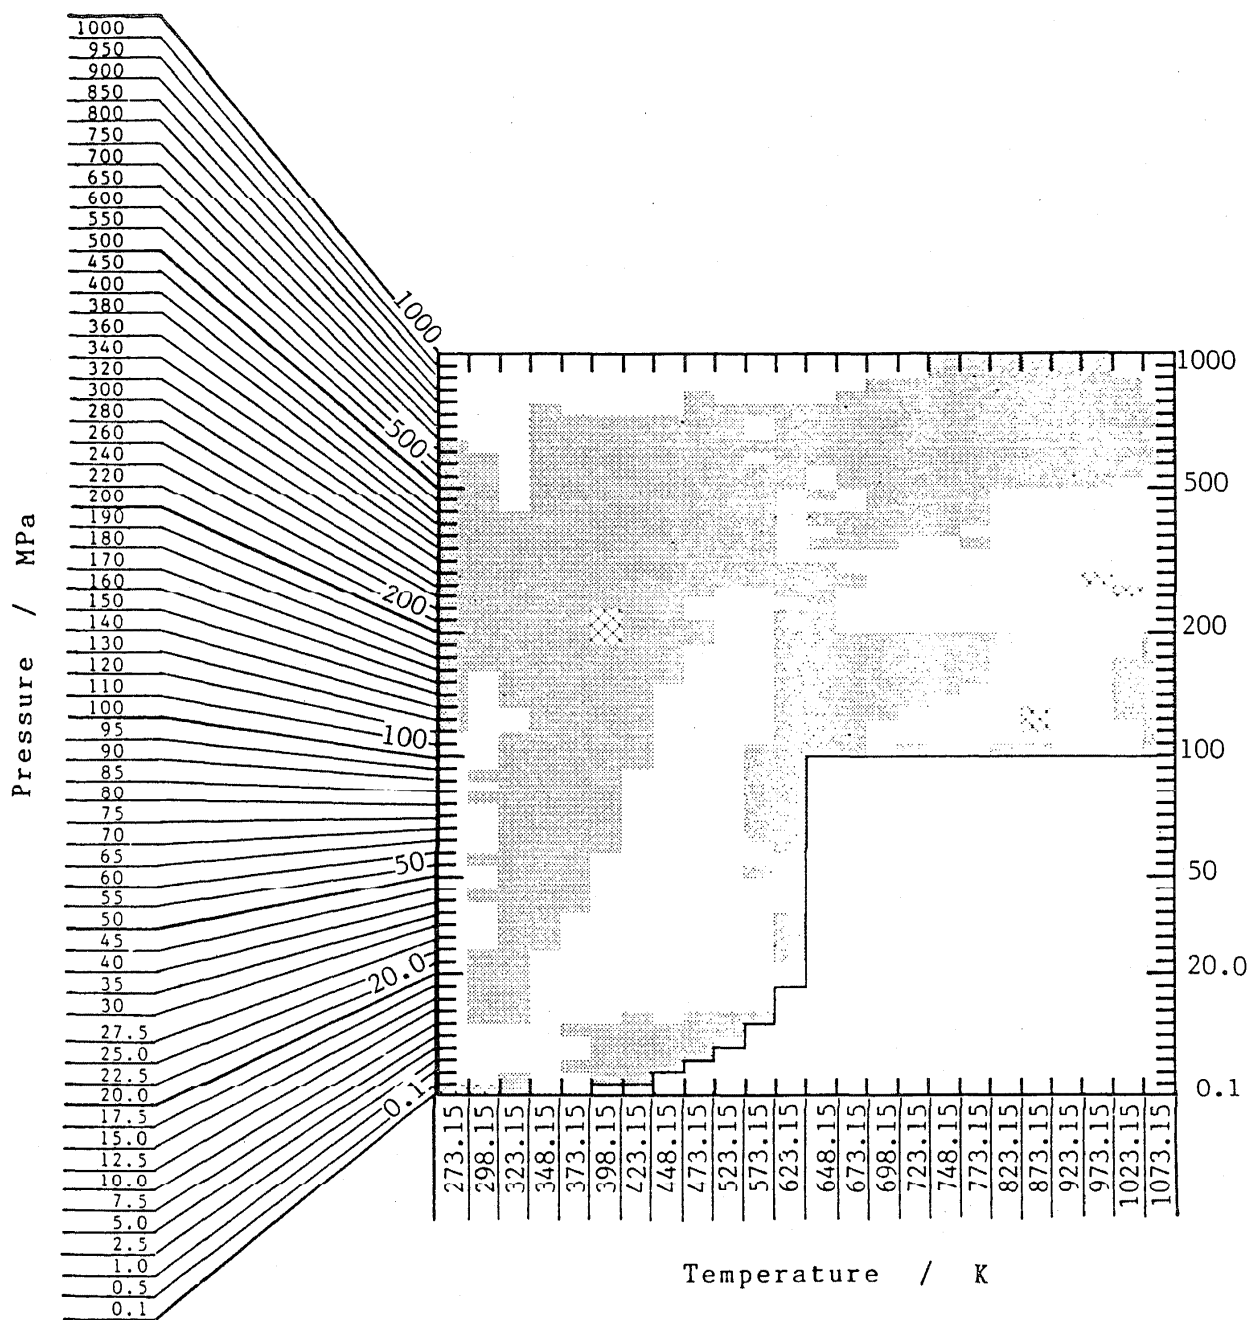


FIG. 22. Comparison of the specific-volume values derived from the equation developed by Sato *et al.* (SUWH) with the present skeleton table values (IST-85). The area where the deviations of SUWH values from IST-85 values are greater than the IST-85 tolerances is shown by crosshatch. The area where SUWH values are larger than IST-85 values is shown by □. The area where SUWH values are smaller than IST-85 values is shown by ■.

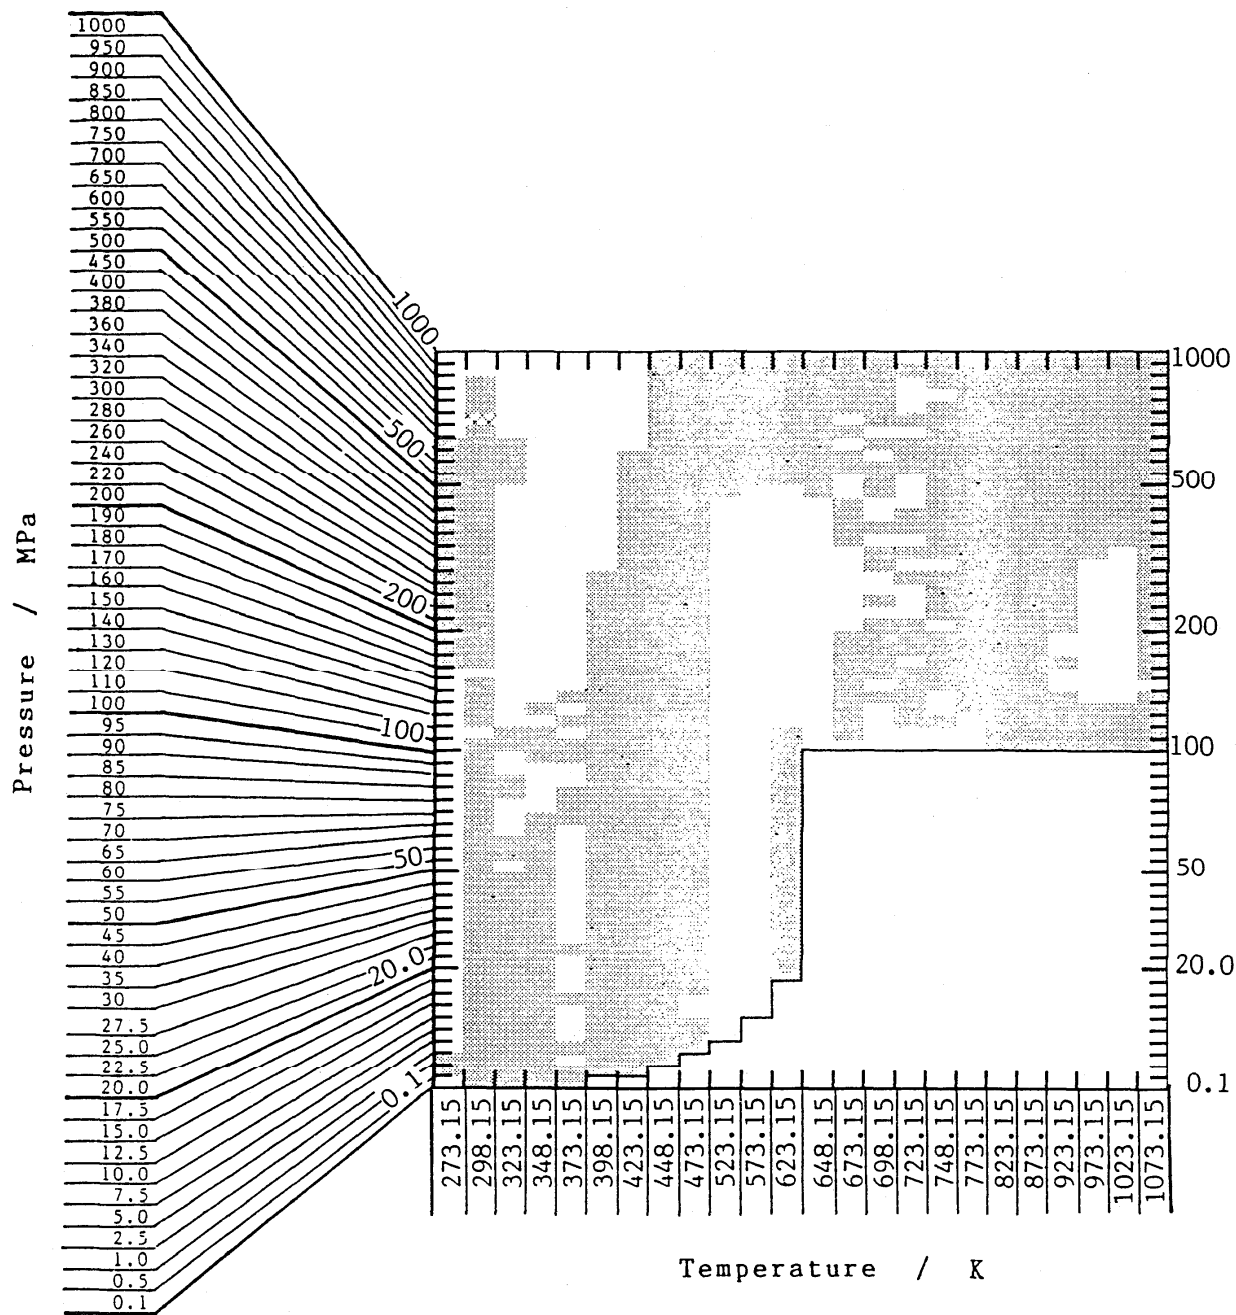


FIG. 23. Comparison of the enthalpy values derived from the equation developed by Sato *et al.* (SUWH) with the present skeleton table values (IST-85). The area where the deviations of SUWH values from IST-85 values are greater than the IST-85 tolerances is shown by crosshatch. The area where SUWH values are larger than IST-85 values is shown by □. The area where SUWH values are smaller than IST-85 values is shown by ■.

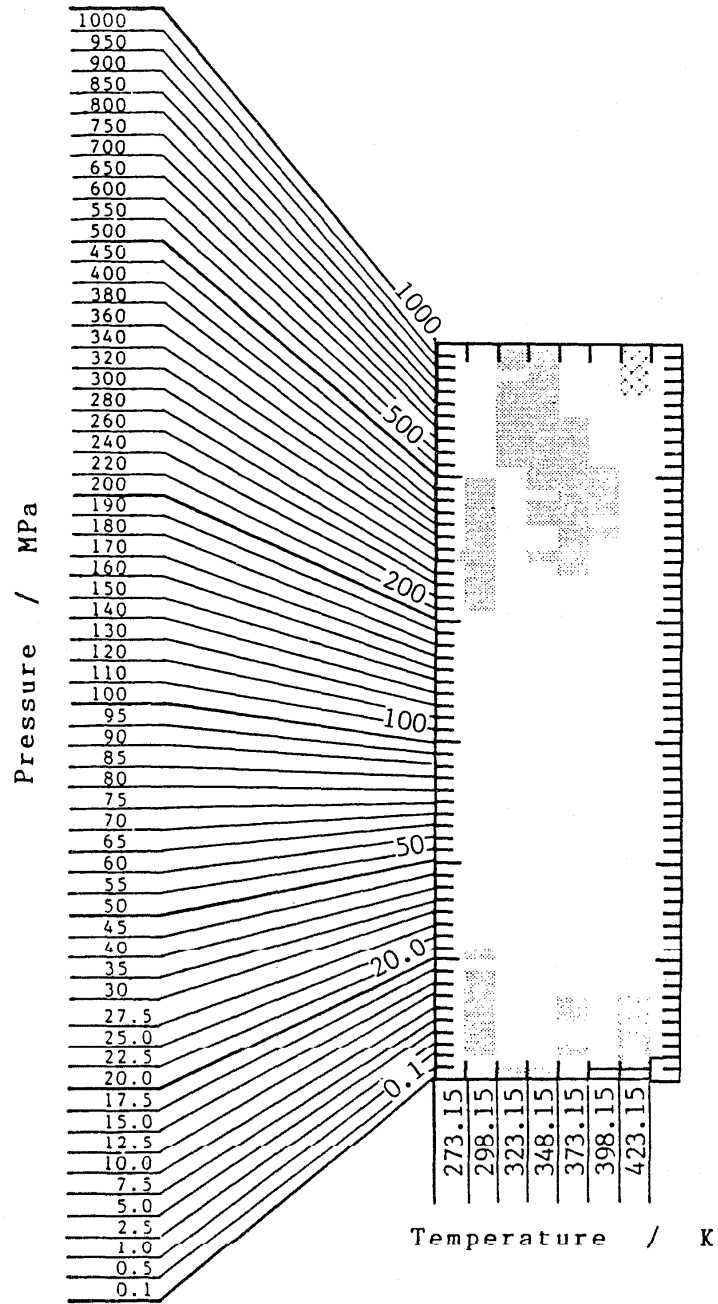


FIG. 24. Comparison of the specific-volume values derived from the equation developed by Sato *et al.* (SUWL) with the present skeleton table values (IST-85). The area where the deviations of SUWL values from IST-85 values are greater than the IST-85 tolerances is shown by crosshatch. The area where SUWL values are larger than IST-85 values is shown by □. The area where SUWL values are smaller than IST-85 values is shown by ■.

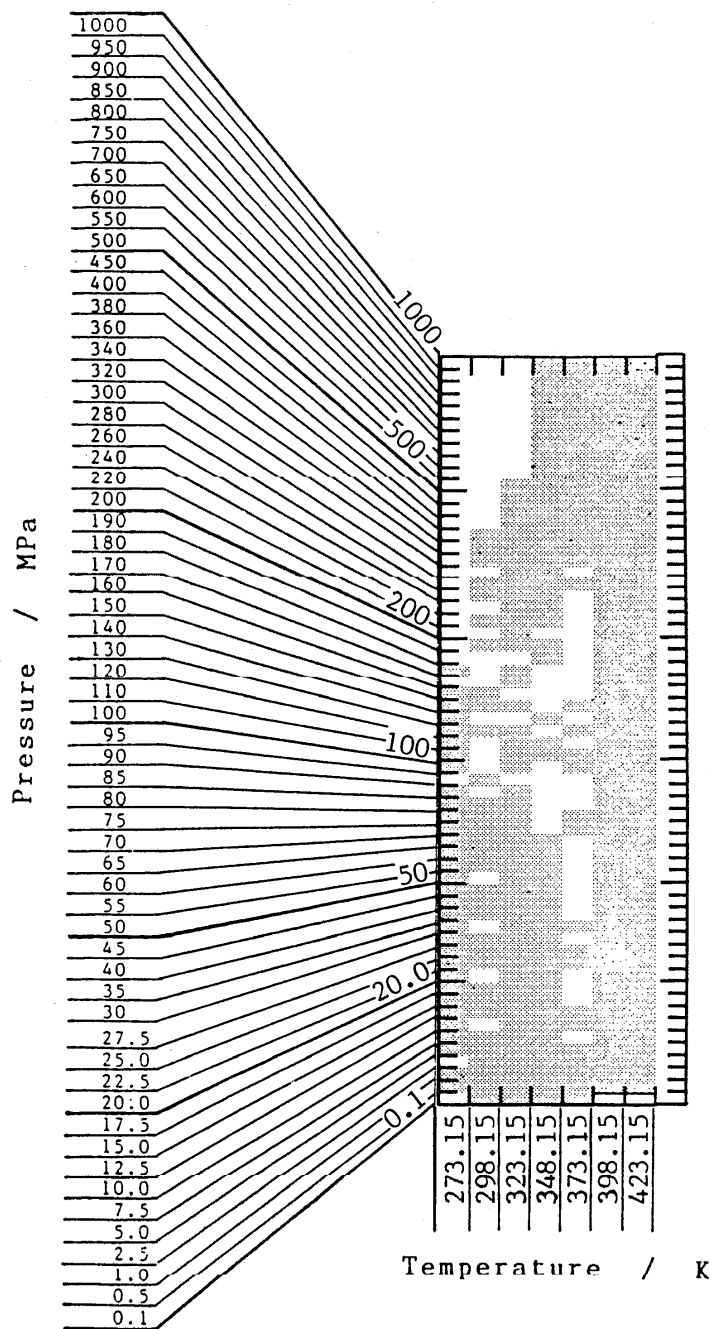


FIG. 25. Comparison of the enthalpy values derived from the equation developed by Sato *et al.* (SUWL) with the present skeleton table values (IST-85). The area where the deviations of SUWL values from IST-85 values are greater than the IST-85 tolerances is shown by crosshatch. The area where SUWL values are larger than IST-85 values is shown by □. The area where SUWL values are smaller than IST-85 values is shown by ■.

## 10. Conclusion

The history and the current state of the art regarding the experimental study of the thermodynamic properties of ordinary water substance are summarized in this paper.

The considerable accumulation of the reliable experimental data in the last two decades has represented the thermodynamic properties of water very well not only in a wide region but also with high reliability. The measurements for the speed of sound and the heat capacity have been carried out in a wide region, and especially, new experimental density data have been obtained at higher pressures beyond 100 MPa after the establishment of IST-63. Moreover, highly reliable experimental data have been obtained at the triple point, at atmospheric pressure, and in the critical region. A set of the present skeleton tables is a concise summary of those experimental data.

The following problems may come up for the future task on the thermodynamic properties of ordinary water substance.

(1) Many present skeleton table values including vapor pressure, density and enthalpy of saturated water and saturated steam, and critical parameters are based on the experimental study performed at one laboratory in the 1930s. Current technology may have the ability to reveal those properties more accurately.

(2) Experimental data on thermodynamic properties near the melting line at temperatures below 298 K and pressures above 100 MPa are not available in spite of their importance to the understanding of the structure and singularities of water; large differences exist among the thermodynamic property values derived from the available equations of state along the 273 K isotherm at high pressures.

(3) No equation can represent the present skeleton table values completely within the associated tolerances. The establishment of improved equations of state is desired at the next step. A set of present skeleton tables can be a valuable base for establishing new equation of state.

## 11. Acknowledgments

We are greatly indebted to J. Straub and N. Rosner for their study to develop skeleton tables. Their excellent work has contributed to a mutual understanding of thermodynamic properties of water. We learned many things from their work throughout our extensive cooperation between the Technical University of Munich and Keio University for the last many years. Their work was one of the most important bases to establish the IAPS Skeleton Tables 1985.

We have profited from the superior knowledge and experience of all of the members of Working Group 1 of the International Association for the Properties of Steam on the equilibrium properties, especially, A. A. Alexandrov, S. Angus, J. R. Cooper, U. Grigull, L. Haar, A. J. W. Hedbäck, P. G. Hill, J. Jůza, G. S. Kell, J. Kestin, E. J. LeFevre, J. M. H. Levelt Sengers, J. V. Sengers, P. Z. Rosta, O. Sifner, J. Straub (chairman), and I. Tanishita.

We express our gratitude to the members of Subcommittee on International Skeleton Steam Tables in the Japanese National Committee on the Properties of Steam (the

139th Committee of the Japan Society for the Promotion of Science), I. Tanishita, Y. Yamada, K. Tanaka, Y. Kobayashi, J. Kijima, and K. Oguchi for detailed discussions and careful advice for the examination of the reliability and smoothness of the draft skeleton table values. Those ungrudging efforts made it possible to attain the present extensive skeleton tables. Especially, we wish to express gratitude to I. Tanishita, the chairman of the 139th Committee, who led us to the global but delicate understanding of skeleton tables with his consistent perception on the importance of skeleton tables.

## 12. References

- <sup>1</sup>D. Eisenberg and W. Kauzmann, *The Structure and Properties of Water* (Oxford at the Clarendon Press, 1969).
- <sup>2</sup>J. Straub, K. Scheffler, N. Rosner, K. Watanabe, M. Uematsu, and H. Sato, in *Data for Science and Technology*, edited by P. S. Glaeser (Pergamon, Oxford, 1981).
- <sup>3</sup>N. Rosner and J. Straub, in *Water and Steam, Their Properties and Current Industrial Applications*, edited by J. Straub and K. Scheffler (Pergamon, Oxford, 1980), p. 58.
- <sup>4</sup>H. Sato, M. Uematsu, and K. Watanabe, in Ref. 3, p. 42.
- <sup>5</sup>H. Sato, M. Uematsu, and K. Watanabe, Bull. JSME **23**, 394 (1980).
- <sup>6</sup>H. Sato, M. Uematsu, and K. Watanabe, Bull. JSME **24**, 691 (1981).
- <sup>7</sup>H. Sato, M. Uematsu, and K. Watanabe, in Ref. 3, p. 50.
- <sup>8</sup>H. Sato, M. Uematsu, and K. Watanabe, in *Proceedings of the First International Symposium on Hydrothermal Reactions, Yokohama, 1982*, edited by S. Somiya, Gakujutu Bunken Fukkyu-kai, 1983, p. 47.
- <sup>9</sup>H. Sato, M. Uematsu, and K. Watanabe, High Temp. High Pressures **17**, 277 (1985).
- <sup>10</sup>H. Sato, M. Uematsu, and K. Watanabe, in *Proceedings of the 10th International Conference on the Properties of Steam, Moscow, 1984*, edited by V. V. Sytchev and A. A. Aleksandrov (Mir Publishers, Moscow, 1986), p. 71; Plenum Press, New York, distributor.
- <sup>11</sup>H. Sato, *A Study on the Thermodynamic Surface of Water and Steam in High Pressures*, dissertation (in Japanese), Keio University, 1981.
- <sup>12</sup>W. Wagner, Fortschr. Ber. VDI-Z, **3** (1974): Report PC/T15, IUPAC Thermodynamic Tables Project Centre, Imperial College, London, 1977.
- <sup>13</sup>W. Wagner and A. Saul, in Ref. 10, p. 199.
- <sup>14</sup>A. Saul and W. Wagner, J. Phys. Chem. Ref. Data **16**, 893 (1987).
- <sup>15</sup>*Supplementary Release on Saturation Properties of Ordinary Water Substance*, The International Association for the Properties of Steam, 1986.
- <sup>16</sup>Mech. Eng. **52**, 120 (1930).
- <sup>17</sup>Mech. Eng. **53**, 289 (1931).
- <sup>18</sup>*The 1967 IFC Formulation for Industrial Use*, The International Formulation Committee of the 6th International Conference on the Properties of Steam, 1967.
- <sup>19</sup>D. Schwarz, Fortschr. Ber., VDI Z. **6** (1967).
- <sup>20</sup>H. Tratz, Paper presented at the 2nd Meeting of IFC, Glasgow (1966).
- <sup>21</sup>K. Watanabe, I. Tanishita, and H. Ozawa, Trans. of Jpn. Soc. Mech. Eng. **34**, 501 (1968).
- <sup>22</sup>I. Tanishita and A. Nagashima, Trans. of Jpn. Soc. Mech. Eng. **34**, 517 (1968).
- <sup>23</sup>*The 1968 IFC Formulation for Scientific and General Use*, The International Formulation Committee of the 6th International Conference on the Properties of Steam, 1968.
- <sup>24</sup>1967 ASME Steam Tables; 1968 JSME Steam Tables; 1980 JSME Steam Tables in SI; U. K. Steam Tables in SI units 1970; Properties of Water and Steam in SI Units, VDI, ASME, JSME, 1979; and so on.
- <sup>25</sup>H. J. White, Jr., in Ref. 3, p. 18.
- <sup>26</sup>*The Contribution of IAPS and ICPS on the Research of the Properties of Steam over a Fifty-Year Period (1929-1979)*, edited by I. Tanishita, in cooperation with M. Uematsu, The Japan National Committee on the Properties of Steam, the 139th Committee of the Japan Society for the Promotion of Science, 1981.
- <sup>27</sup>J. Straub, in Ref. 3, p. 33.
- <sup>28</sup>*Release on the IAPS Formulation 1984 for the Thermodynamic Properties of Ordinary Water Substance for Scientific and General Use*, The International Association for the Properties of Steam, 1984.

- <sup>29</sup>Release on the IAPS Skeleton Tables 1985 for the Thermodynamic Properties of Ordinary Water Substance, The International Association for the Properties of Steam, 1985.
- <sup>30</sup>1983 IAPS Statement, Values of Temperature, Pressure, and Density of Ordinary and Heavy Water Substances at their Respective Critical Points," J. Phys. Chem. Ref. Data, **14**, 207 (1985).
- <sup>31</sup>H. F. Stimson, J. Res. Natl. Bur. Stand. **65A**, 139 (1961).
- <sup>32</sup>"The International Practical Temperature Scale of 1968," Metrologia **5**, 35 (1969).
- <sup>33</sup>K. Watanabe, in cooperation with M. Uematsu, in *Proceedings of the 8th International Conference on the Properties of Steam*. Giens, 1974; PB Rept. No. PB 284121 (1978).
- <sup>34</sup>J. H. Keenan, F. G. Keyes, P. G. Hill, and J. G. Moore, *Steam Tables, Thermodynamic Properties of Water including Vapor, Liquid, and Solid Phases* (Wiley, New York, 1969).
- <sup>35</sup>J. Jüza, Rozpr. Cesk. Akad. Ved. Rada Tech. Ved. **76**, 143 (1966).
- <sup>36</sup>J. Straub, and N. Rosner, "Classification of PVT data of Water and Steam," distributed to the members of Working Group 1 of the International Association for the Properties of Steam, 1977.
- <sup>37</sup>J. Straub and N. Rosner, "Classification of Caloric Properties of Water and Steam," distributed to the members of Working Group 1 of the International Association for the Properties of Steam, 1977.
- <sup>38</sup>E. H. Amagat, Ann. Chim. Phys. **29**, 505 (1893).
- <sup>39</sup>P. W. Bridgman, Proc. Am. Acad. Arts Sci. **47**, 441 (1912).
- <sup>41</sup>P. W. Bridgman, Proc. Am. Acad. Arts Sci. **66**, 185 (1931).
- <sup>42</sup>P. W. Bridgman, J. Chem. Phys. **3**, 597 (1935).
- <sup>43</sup>L. B. Smith and F. G. Keyes, Proc. Am. Acad. Arts Sci. **69**, 285 (1934).
- <sup>44</sup>F. G. Keyes, L. B. Smith, and H. T. Gerry, Proc. Am. Acad. Arts Sci. **70**, 319 (1935).
- <sup>45</sup>G. C. Kennedy, Am. J. Sci. **225**, 724 (1957).
- <sup>46</sup>G. C. Kennedy, W. L. Knight, and W. T. Holser, Am. J. Sci. **256**, 590 (1958).
- <sup>47</sup>W. T. Holser and G. C. Kennedy, Am. J. Sci. **256**, 744 (1958).
- <sup>48</sup>W. T. Holser and G. C. Kennedy, Am. J. Sci. **257**, 71 (1959).
- <sup>49</sup>V. A. Kirillin and S. A. Ulybin, Teploenergetika **6**, 3 (1959).
- <sup>50</sup>M. P. Vukalovich, V. N. Zubarev, and A. A. Alexandrov, Teploenergetika **6**, 74 (1959).
- <sup>51</sup>M. P. Vukalovich, V. N. Zubarev, and A. A. Alexandrov, Teploenergetika **8**, 79 (1961).
- <sup>52</sup>M. P. Vukalovich, V. N. Zubarev, and A. A. Alexandrov, Teploenergetika **9**, 49 (1962).
- <sup>53</sup>J. Jüza, V. Kmoniček, and O. Šifner, Acta Tech. **6**, 553 (1961).
- <sup>54</sup>S. L. Rivkin and T. S. Akhundov, Teploenergetika **9**, 57 (1962).
- <sup>55</sup>S. L. Rivkin and T. S. Akhundov, Teploenergetika **10**, 66 (1963).
- <sup>56</sup>S. L. Rivkin, G. V. Troyanovskaya, and T. S. Akhundov, Teplofiz. Vys. Temp. **2**, 219 (1964).
- <sup>57</sup>S. L. Rivkin and G. V. Troyanovskaya, Teploenergetika **11**, 72 (1964).
- <sup>58</sup>S. L. Rivkin, T. S. Akhundov, E. A. Kremenevskaya, and N. N. Asadulaeva, Teploenergetika, **13**, 59 (1966).
- <sup>59</sup>I. Tanishita, and K. Watanabe, presented at the 6th International Conference on the Properties of Steam, New York (1963):JCPS Report No. 9, The Japan Society of Mechanical Engineers, 1963.
- <sup>60</sup>I. Tanishita, K. Watanabe, J. Kijima, and M. Uematsu, paper to the 7th International Conference on the Properties of Steam, Tokyo, 1968.
- <sup>61</sup>I. Tanishita, K. Watanabe, J. Kijima, H. Ishii, K. Oguchi, and M. Uematsu, J. Chem. Thermodyn. **8**, 1 (1976).
- <sup>62</sup>S. Sugawara, T. Sato, and T. Minamiyama, Bull. JSME **7**, 136 (1964).
- <sup>63</sup>S. Maier and E. U. Franck, Ber. Bunsenges. Phys. Chem. **70**, 639 (1966).
- <sup>64</sup>H. Köster and E. U. Franck, Ber. Bunsenges. Phys. Chem. **73**, 716 (1969).
- <sup>65</sup>R. Vedam and G. Holton, J. Acoust. Soc. Am. **43**, 108 (1968).
- <sup>66</sup>V. A. Borzunov, V. N. Razumikhin, and V. A. Stekol'nikov, Teplofiz. Svoistva Veshchestv Mater. **2**, 146 (1970).
- <sup>67</sup>T. Grindley and J. E. Lind, Jr., J. Chem. Phys. **54**, 3983 (1971).
- <sup>68</sup>H. Garnjost, Ber. Bunsenges. Phys. Chem. **78**, 1002 (1974).
- <sup>69</sup>B. A. Grigoryev, R. M. Murdaev, and Yu. L. Rastorguyev, Teplofiz. Vys. Temp. **12**, 83 (1974).
- <sup>70</sup>G. S. Kell, G. E. McLaurin, and E. Whalley, paper presented at the 8th International Conference on the Properties of Steam, Gien, 1974: Philos. Trans. R. Soc. London, **315A**, 235 (1985).
- <sup>71</sup>G. S. Kell and E. Whalley, J. Chem. Phys. **62**, 3496 (1975).
- <sup>72</sup>G. S. Kell, G. E. McLaurin, and E. Whalley, Proc. R. Soc. London, Ser. A **360**, 389 (1978).
- <sup>73</sup>A. A. Alexandrov, T. S. Khasanshin, and D. K. Larkin, Zhur. Fiz. Khim. **50**, 394 (1976).
- <sup>74</sup>A. A. Alexandrov, T. S. Khasanshin, D. K. Larkin, paper to the Working Group 1 of the International Association for the Properties of Steam, Kyoto 1976.
- <sup>75</sup>V. N. Zubarev, P. G. Prusakov, and V. V. Barkovskii, Teploenergetika, **24**, 77 (1977).
- <sup>76</sup>V. N. Zubarev, P. G. Prusakov, and V. V. Barkovskii, Teploenergetika, **24**, 80 (1977).
- <sup>77</sup>C. W. Burnham, J. R. Holloway, and N. F. Davis, data sheets distributed to the members of the Working Group 1 of the International Association for the Properties of Steam, 1977.
- <sup>78</sup>R. Hilbert, K. Tödheide, and E. U. Franck, Ber. Bunsenges. Phys. Chem. **85**, 636 (1981).
- <sup>79</sup>H. Hanafusa, T. Tsuchida, M. Araki, H. Sato, M. Uematsu, and K. Watanabe, High Temp. High Pressures **15**, 311 (1983).
- <sup>80</sup>N. E. Dorsey, *Properties of Ordinary Water-Substance* (Reinhold, 1940).
- <sup>81</sup>C. W. Burnham, J. R. Holloway, and N. F. Davis, Am. J. Sci. **267A**, 70 (1969).
- <sup>82</sup>A. A. Alexandrov and D. K. Larkin, Teploenergetika **21**, 80 (1974).
- <sup>83</sup>J. M. H. Levelt Sengers, J. Straub, K. Watanabe, and P. G. Hill, J. Phys. Chem. Ref. Data **14**, 193 (1985).
- <sup>84</sup>G. S. Kell and E. Whalley, Philos. Trans. R. Soc. **258A**, 565 (1965).
- <sup>85</sup>C. -T. Chen, R. A. Fine, and F. J. Millero, J. Chem. Phys. **66**, 2142 (1977).
- <sup>86</sup>W. Gildseth, A. Habenschuss, and F. H. Spedding, J. Chem. Eng. Data **17**, 402 (1972).
- <sup>87</sup>G. S. Kell, J. Chem. Eng. Data **20**, 97 (1975).
- <sup>88</sup>V. A. Del Grosso, J. Acoust. Soc. Am. **47**, 947 (1970).
- <sup>89</sup>V. A. Del Grosso and C. W. Mader, J. Acoust. Soc. Am. **52**, 1442 (1972).
- <sup>90</sup>W. J. de Haas, Prov. Verv. Com. Int. Poids Mes. **22**, 85 (1950).
- <sup>91</sup>H. Sato, M. Uematsu, and K. Watanabe, Strojnícky Casopis **36**, 257 (1985).
- <sup>92</sup>W. D. Wilson, J. Acoust. Soc. Am. **31**, 1067 (1959).
- <sup>93</sup>J. Havlíček and V. Miškovský, Helevetica Phys. Acta. **9**, 161 (1936).
- <sup>94</sup>M. P. Vukalovich, V. N. Zubarev, and P. G. Prusakov, Teploenergetika **5**, 22 (1958).
- <sup>95</sup>M. P. Vukalovich, V. N. Zubarev, and P. G. Prusakov, Teploenergetika **9**, 56 (1962).
- <sup>96</sup>M. P. Vukalovich, V. N. Zubarev, and P. G. Prusakov, Teploenergetika **10**, 63 (1963).
- <sup>97</sup>G. S. Callendar and A. C. Egerton, Philos. Trans. R. Soc. London Ser. A **252**, 133 (1960).
- <sup>98</sup>A. E. Sheindlin and N. I. Gorbunova, Teploenergetika **11**, 86 (1964).
- <sup>99</sup>S. Angus and D. M. Newitt, Philos. Trans. R. Soc. London Ser. A **259**, 107 (1966).
- <sup>100</sup>N. S. Osborne, H. F. Stimson, E. F. Fiock, and D. C. Ginnings, J. Res. Natl. Bur. Stand. **10**, 155 (1933).
- <sup>101</sup>S. L. Rivkin, G. V. Troyanovskaya, and T. S. Akhundov, High Temp. **2**, 194 (1964).
- <sup>102</sup>H. F. Stimson, J. Res. Natl. Bur. Stand. **73A**, 493 (1969).
- <sup>103</sup>L. A. Guildner, D. P. Johnson, and F. E. Jones, J. Res. Natl. Bur. Stand. **80A**, 505 (1976).
- <sup>104</sup>H. Hanafusa, T. Tsuchida, K. Kawai, H. Sato, M. Uematsu, and K. Watanabe, Ref. **10**, p. 180.
- <sup>105</sup>N. S. Osborne, H. F. Stimson, and D. C. Ginnings, J. Res. Natl. Bur. Stand. **18**, 389 (1937).
- <sup>106</sup>N. S. Osborne and C. H. Meyers, J. Res. Natl. Bur. Stand. **13**, 1 (1933).
- <sup>107</sup>N. S. Osborne, H. F. Stimson, and D. C. Ginnings, J. Res. Natl. Bur. Stand. **23**, 197 (1939).
- <sup>108</sup>N. S. Osborne, H. F. Stimson, and E. F. Fiock, J. Res. Natl. Bur. Stand. **5**, 411 (1930).
- <sup>109</sup>H. D. Baehr, H. Schomacker, and S. Schulz, Forsch. Ingenieurwes. **40**, 15 (1974).
- <sup>110</sup>H. F. Stimson, Am. J. Phys. **23**, 614 (1955).
- <sup>111</sup>R. Pollak, "Die Thermodynamischen Eigenschaften von Wasser," Dissertation, Ruhr-Universität Bochum, 1974.
- <sup>112</sup>L. Haar, J. S. Gallagher, and G. S. Kell, *NBS/NRC Steam Tables*, Hemisphere Publishing Corporation and McGraw-Hill International Book Company (1984).
- <sup>113</sup>H. Sato, M. Uematsu, and K. Watanabe, in *Proceedings of the 8th Symposium on Thermophysical Properties*, edited by J. V. Sengers (ASME, Gaithersburg, 1982), p. 287.
- <sup>114</sup>A. M. Sirota and D. T. Timrot, Teploenergetika **1**, 11 (1956).
- <sup>115</sup>A. M. Sirota, Teploenergetika **5**, 10 (1985).
- <sup>116</sup>A. M. Sirota and B. K. Malcev, Teploenergetika **6**, 7 (1959).
- <sup>117</sup>A. M. Sirota and B. K. Malcev, Teploenergetika **7**, 67 (1960).

- <sup>118</sup>A. M. Sirota and B. K. Malcev, *Teplotenergetika* 9, 52 (1962).  
<sup>119</sup>A. M. Sirota and B. K. Malcev, *Teplotenergetika* 9, 70 (1962).  
<sup>120</sup>A. M. Sirota, B. K. Malcev, and A. Grishkov, *Teplotenergetika* 10, 57 (1963).  
<sup>121</sup>A. M. Sirota, *Inzh. Fiz. Zh.* 6, 52 (1963).  
<sup>122</sup>A. M. Sirota and A. Grishkov, *Teplotenergetika* 13, 61 (1966).  
<sup>123</sup>A. M. Sirota, P. E. Beljakova, and Z. Kh. Shrago, *Teplotenergetika* 13, 84 (1966).  
<sup>124</sup>A. M. Sirota and A. Grishkov, paper to the 7th International Conference on the Properties of Steam, Tokyo (1968).  
<sup>125</sup>A. M. Sirota and Z. Kh. Shrago, *Teplotenergetika* 15, 24 (1968).  
<sup>126</sup>A. M. Sirota, A. Grishkov, and A. G. Tomishko, *Teplotenergetika* 17, 60 (1970).  
<sup>127</sup>J. Ewers and W. Wagner, in Ref. 113, p. 78.  
<sup>128</sup>J. Ewers and W. Wagner, *VDI-Forsch. -Heft* 609, 27 (1982).  
<sup>129</sup>L. A. Guildner and R. E. Edsinger, *J. Res. Natl. Bur. Stand.* 80A, 703 (1976).  
<sup>130</sup>E. J. LeFevre, M. R. Nightingale, and J. W. Rose, *J. Mech. Eng. Sci.* 17, 243 (1975).

## Appendix I

### The International Association for the Properties of Steam

*Release on the IAPS Skeleton Tables 1985 for The Thermodynamic Properties of Ordinary Water Substance*

Unrestricted publication allowed in all countries.

Issued by the International Association for the Properties of Steam.

President, Professor P. G. Hill  
 Department of Mechanical Engineering  
 University of British Columbia  
 Vancouver, B.C. VGT 1W5, Canada

Executive Secretary, Dr. Howard J. White, Jr.  
 Office of Standard Reference Data  
 National Bureau of Standards  
 Gaithersburg, MD 20899 USA

This release is issued by the International Association for the Properties of Steam (IAPS) on the authority of the Tenth International Conference on the Properties of Steam, held in Moscow, USSR, 2–7 September, 1984. The members of IAPS are: Canada, the Czechoslovak Socialist Republic, the Federal Republic of Germany, France, Japan, the Union of Soviet Socialist Republics, the United Kingdom and the United States of America.

Part I of this release contains two Skeleton Tables of Thermodynamic Properties of Single-Fluid Phase of Ordinary Water Substance. Table 1 gives the most probable specific volume values with their associated tolerances for the range of temperatures 273.15–1073.15 K and pressures up to 1000 MPa, whereas Table 2 gives the most probable specific enthalpy values with their associated tolerances for the same range of temperatures and pressures.

Part II of this release contains Skeleton Tables of Thermodynamic Properties along the Saturation Curve of Ordinary Water Substance. Table 3 gives the most probable thermodynamic property values with their associated tolerances for the coexisting vapor–liquid phases between the triple point and the critical point.

It should be noted that the International Skeleton tables (October 1963), authorized at the sixth International Conference on the Properties of Steam in New York, U.S.A., 1963, are hereby withdrawn from the authorization of IAPS.

Further information can be obtained from the Executive Secretary of IAPS:

Dr. Howard J. White, Jr.  
 Office of Standard Reference Data  
 National Bureau of Standards  
 Gaithersburg, MD 20899 USA

Part I: Skeleton Tables 1985 of Thermodynamic Properties of Single-fluid Phase of Ordinary Water Substance

Table 1. The most probable specific volumes with their associated tolerances

The specific volumes(upper figure) and their associated tolerances(lower figure) are given in dm<sup>3</sup>/kg

Pressure MPa	Temperature, K (IPTS-68)											
	273.15	298.15	323.15	348.15	373.15	398.15	423.15	448.15	473.15	523.15	573.15	623.15
0.101325	1.00016 ±0.00001**	1.00296 0.00001	1.01211 0.00001	1.02580 0.00002	1.04344* 0.00002	1792.9 1.2	1910.7 1.2	2027.7 1.2	2143.7 1.2	2374.4 1.2	2604.2 1.3	2833.2 1.4
0.5	0.99995 0.00006	1.00278 0.00006	1.01193 0.00006	1.02560 0.00006	1.04324 0.00006	1.06474 0.00007	1.09045 0.00009	399.28 0.32	424.80 0.32	474.25 0.32	522.49 0.32	570.03 0.34
1.0	0.99969 0.00010	1.00256 0.00010	1.01170 0.00010	1.02536 0.00010	1.04299 0.00010	1.06443 0.00011	1.09010 0.00014	1.12057 0.00017	205.85 0.21	232.57 0.20	257.84 0.20	282.38 0.20
2.5	0.99893 0.00010	1.00188 0.00010	1.01103 0.00010	1.02466 0.00010	1.04222 0.00010	1.06358 0.00013	1.08910 0.00014	1.11934 0.00018	1.15552 0.00025	86.95 0.09	98.84 0.09	109.69 0.09
5.0	0.99767 0.00010	1.00076 0.00010	1.00992 0.00010	1.02350 0.00010	1.04096 0.00010	1.06215 0.00015	1.08744 0.00017	1.11734 0.00020	1.15296 0.00028	1.24960 0.00031	45.29 0.07	51.91 0.08
7.5	0.99642 0.00010	0.99965 0.00010	1.00882 0.00010	1.02236 0.00010	1.03972 0.00010	1.06075 0.00016	1.08580 0.00021	1.11537 0.00029	1.15050 0.00032	1.24520 0.00037	26.71 0.04	32.41 0.05
10.0	0.99518 0.00010	0.99855 0.00010	1.00774 0.00010	1.02122 0.00010	1.03848 0.00010	1.05935 0.00016	1.08417 0.00021	1.11342 0.00030	1.14810 0.00034	1.2409 0.0004	1.3975 0.0006	22.42 0.04
12.5	0.99396 0.00010	0.99745 0.00010	1.00666 0.00010	1.02010 0.00010	1.03724 0.00010	1.05798 0.00016	1.08255 0.00021	1.11152 0.00031	1.1457 0.0004	1.2367 0.0004	1.3872 0.0006	16.12 0.04
15.0	0.99274 0.00010	0.99636 0.00010	1.00559 0.00010	1.01898 0.00010	1.03603 0.00010	1.05662 0.00016	1.08097 0.00021	1.10964 0.00033	1.1434 0.0004	1.2327 0.0005	1.3776 0.0006	11.470 0.034
17.5	0.99153 0.00010	0.99527 0.00010	1.00452 0.00010	1.01787 0.00010	1.03482 0.00010	1.05526 0.00016	1.07940 0.00021	1.10780 0.00033	1.1411 0.0004	1.2288 0.0005	1.3687 0.0006	1.7144 0.0017
20.0	0.99032 0.00010	0.99420 0.00010	1.00346 0.00010	1.01677 0.00010	1.03362 0.00010	1.05393 0.00016	1.07786 0.00021	1.10597 0.00033	1.1389 0.0004	1.2250 0.0005	1.3604 0.0006	1.6649 0.0016
22.5	0.98914 0.00010	0.99313 0.00010	1.00242 0.00010	1.01569 0.00010	1.03245 0.00010	1.05261 0.00016	1.07635 0.00021	1.10413 0.00033	1.1367 0.0004	1.2214 0.0005	1.3528 0.0006	1.6286 0.0016
25.0	0.98796 0.00010	0.99205 0.00010	1.00139 0.00010	1.01461 0.00010	1.03128 0.00010	1.05130 0.00016	1.07485 0.00021	1.10230 0.00033	1.1345 0.0004	1.2178 0.0005	1.3453 0.0006	1.5983 0.0014
27.5	0.98678 0.00010	0.99100 0.00010	1.00035 0.00010	1.01353 0.00010	1.03012 0.00012	1.05000 0.00016	1.07336 0.00024	1.10055 0.00033	1.1323 0.0004	1.2143 0.0005	1.3383 0.0007	1.5733 0.0013
30.0	0.98562 0.00010	0.98995 0.00010	0.99932 0.00010	1.01246 0.00010	1.02897 0.00012	1.04872 0.00016	1.07189 0.00024	1.09880 0.00033	1.1302 0.0004	1.2110 0.0005	1.3316 0.0007	1.5521 0.0012
35.	0.98333 0.00010	0.98789 0.00010	0.99729 0.00010	1.01136 0.00010	1.02670 0.00012	1.04620 0.00017	1.06900 0.00024	1.09540 0.00033	1.1261 0.0004	1.2045 0.0005	1.3192 0.0007	1.5168 0.0012
40.	0.98108 0.00010	0.98586 0.00010	0.99528 0.00010	1.00828 0.00010	1.02446 0.00012	1.04371 0.00017	1.06616 0.00024	1.09210 0.00033	1.1221 0.0004	1.1982 0.0005	1.3078 0.0007	1.4878 0.0012
45.	0.97886 0.00010	0.98385 0.00010	0.99330 0.00010	1.00623 0.00010	1.02226 0.00012	1.04128 0.00017	1.06340 0.00024	1.0888 0.0004	1.1183 0.0004	1.1923 0.0005	1.2972 0.0007	1.4634 0.0011
50.	0.97666 0.00010	0.98186 0.00010	0.99136 0.00010	1.00421 0.00010	1.02009 0.00012	1.03889 0.00017	1.06069 0.00024	1.0857 0.0004	1.1145 0.0005	1.1866 0.0005	1.2874 0.0007	1.4420 0.0011
55.	0.97451 0.00010	0.97992 0.00010	0.98944 0.00010	1.00223 0.00010	1.01796 0.00012	1.03654 0.00017	1.05804 0.00025	1.0826 0.0004	1.1109 0.0005	1.1812 0.0005	1.2781 0.0007	1.4232 0.0011
60.	0.97240 0.00010	0.97799 0.00010	0.98755 0.00010	1.00027 0.00010	1.01586 0.00012	1.03424 0.00017	1.05545 0.00025	1.0796 0.0004	1.1074 0.0005	1.1760 0.0005	1.2695 0.0007	1.4063 0.0010



Table 1. The most probable specific volumes with their associated tolerances—continued

The specific volumes(upper figure) and their associated tolerances(lower figure) are given in  $\text{dm}^3/\text{g}$ 

Pressure MPa	Temperature, K (IPTS-68)											
	273.15	298.15	323.15	348.15	373.15	398.15	423.15	448.15	473.15	523.15	573.15	623.15
65.	0.97031 0.00010	0.97609 0.00010	0.98563 0.00010	0.99834 0.00010	1.01380 0.00012	1.03197 0.00017	1.05290 0.00025	1.0767 0.0004	1.1039 0.0005	1.1710 0.0006	1.2614 0.0008	1.3910 0.0010
70.	0.96826 0.00010	0.97422 0.00010	0.98383 0.00010	0.99644 0.00010	1.01178 0.00012	1.02975 0.00017	1.05040 0.00026	1.0739 0.0004	1.1006 0.0005	1.1661 0.0006	1.2537 0.0008	1.3770 0.0010
75.	0.96624 0.00010	0.97237 0.00010	0.98202 0.00010	0.99457 0.00010	1.00978 0.00012	1.02756 0.00017	1.04795 0.00026	1.0711 0.0004	1.0974 0.0005	1.1615 0.0006	1.2464 0.0008	1.3642 0.0010
80.	0.96426 0.00011	0.97056 0.00011	0.98022 0.00011	0.99272 0.00012	1.00781 0.00014	1.02541 0.00019	1.04554 0.00028	1.0683 0.0004	1.0942 0.0005	1.1570 0.0007	1.2394 0.0008	1.3523 0.0010
85.	0.96230 0.00011	0.96875 0.00011	0.97845 0.00011	0.99090 0.00013	1.00587 0.00016	1.02329 0.00020	1.04318 0.00029	1.0656 0.0004	1.0911 0.0005	1.1526 0.0007	1.2328 0.0009	1.3411 0.0011
90.	0.96037 0.00011	0.96698 0.00012	0.97670 0.00012	0.98910 0.00014	1.00396 0.00017	1.02121 0.00021	1.04086 0.00029	1.0630 0.0004	1.0881 0.0005	1.1484 0.0007	1.2264 0.0009	1.3307 0.0012
95.	0.95848 0.00012	0.96522 0.00013	0.97497 0.00013	0.98732 0.00015	1.00207 0.00018	1.01916 0.00021	1.03858 0.00030	1.0604 0.0004	1.0851 0.0005	1.1443 0.0008	1.2203 0.0010	1.3209 0.0013
100.	0.95660 0.00015	0.96347 0.00015	0.97325 0.00015	0.98556 0.00016	1.00021 0.00019	1.01713 0.00024	1.03633 0.00031	1.0579 0.0004	1.0822 0.0005	1.1403 0.0008	1.2145 0.0010	1.3116 0.0013
110.	0.95290 0.00020	0.96004 0.00017	0.96985 0.00017	0.98208 0.00018	0.99653 0.00022	1.01317 0.00027	1.03190 0.00036	1.0529 0.0005	1.0766 0.0006	1.1326 0.0009	1.2033 0.0011	1.2944 0.0014
120.	0.94940 0.00030	0.95671 0.00020	0.96655 0.00020	0.97869 0.00020	0.99297 0.00025	1.00932 0.00031	1.0277 0.0004	1.0482 0.0005	1.0711 0.0007	1.1253 0.0009	1.1929 0.0012	1.2788 0.0015
130.	0.9460 0.0004	0.95347 0.00020	0.96335 0.00020	0.97540 0.00023	0.98950 0.00027	1.00558 0.00034	1.0235 0.0005	1.0436 0.0006	1.0660 0.0008	1.1184 0.0010	1.1833 0.0013	1.2646 0.0015
140.	0.9426 0.0005	0.95032 0.00022	0.96023 0.00023	0.97220 0.00025	0.98612 0.00029	1.00190 0.00035	1.0196 0.0005	1.0392 0.0006	1.0609 0.0008	1.1118 0.0011	1.1743 0.0013	1.2516 0.0016
150.	0.9394 0.0006	0.94725 0.00024	0.95720 0.00025	0.96907 0.00027	0.98282 0.00032	0.99830 0.00039	1.0157 0.0005	1.0349 0.0007	1.0561 0.0008	1.1055 0.0011	1.1657 0.0014	1.2395 0.0016
160.	0.9362 0.0007	0.94427 0.00029	0.95423 0.00030	0.96602 0.00029	0.97960 0.00034	0.9949 0.0004	1.0119 0.0005	1.0307 0.0007	1.0515 0.0009	1.0995 0.0011	1.1577 0.0014	1.2282 0.0017
170.	0.9331 0.0008	0.94134 0.00031	0.95131 0.00031	0.96302 0.00032	0.97645 0.00037	0.9915 0.0004	1.0083 0.0006	1.0267 0.0007	1.0470 0.0009	1.0938 0.0011	1.1500 0.0014	1.2177 0.0017
180.	0.9301 0.0010	0.93849 0.00033	0.94845 0.00033	0.96010 0.00033	0.9733 0.0004	0.9883 0.0005	1.0048 0.0006	1.0228 0.0007	1.0426 0.0009	1.0882 0.0011	1.1426 0.0014	1.2078 0.0017
190.	0.9272 0.0015	0.93571 0.00034	0.94568 0.00034	0.95725 0.00034	0.9704 0.0005	0.9851 0.0005	1.0013 0.0006	1.0190 0.0007	1.0384 0.0009	1.0828 0.0011	1.1356 0.0014	1.1984 0.0017
200.	0.9244 0.0020	0.93299 0.00035	0.94295 0.00035	0.95440 0.00037	0.9674 0.0005	0.9820 0.0006	0.9979 0.0006	1.0153 0.0007	1.0342 0.0009	1.0775 0.0011	1.1289 0.0014	1.1895 0.0017
220.	0.9189 0.0025	0.9277 0.0006	0.9376 0.0006	0.9490 0.0006	0.9618 0.0006	0.9759 0.0006	0.9913 0.0007	1.0080 0.0008	1.0261 0.0012	1.0675 0.0014	1.1162 0.0015	1.1730 0.0018
240.	0.9137 0.0030	0.9226 0.0008	0.9325 0.0008	0.9437 0.0008	0.9563 0.0008	0.9700 0.0009	0.9850 0.0009	1.0011 0.0010	1.0186 0.0012	1.0583 0.0014	1.1045 0.0016	1.1579 0.0020
260.	0.9088 0.0035	0.9177 0.0010	0.9276 0.0010	0.9387 0.0010	0.9510 0.0011	0.9645 0.0011	0.9790 0.0011	0.9947 0.0012	1.0116 0.0014	1.0497 0.0016	1.0937 0.0019	1.1443 0.0023
280.	0.904 0.004	0.9130 0.0012	0.9228 0.0012	0.9339 0.0012	0.9460 0.0013	0.9591 0.0013	0.9733 0.0013	0.9886 0.0014	1.0050 0.0015	1.0416 0.0018	1.0836 0.0021	1.1317 0.0026
300.	0.900 0.005	0.9085 0.0014	0.9183 0.0014	0.9292 0.0014	0.9411 0.0014	0.9540 0.0015	0.9678 0.0015	0.9828 0.0015	0.9988 0.0017	1.0339 0.0019	1.0740 0.0023	1.1197 0.0028
320.	0.895 0.006	0.9041 0.0015	0.9138 0.0015	0.9246 0.0015	0.9364 0.0016	0.9490 0.0016	0.9626 0.0016	0.9771 0.0017	0.9927 0.0019	1.0265 0.0021	1.0651 0.0025	1.1080 0.0030
340.	0.891 0.007	0.8999 0.0016	0.9095 0.0016	0.9202 0.0016	0.9319 0.0017	0.9443 0.0017	0.9575 0.0017	0.9717 0.0018	0.9869 0.0020	1.0193 0.0023	1.0568 0.0027	1.0980 0.0032

Table 1. The most probable specific volumes with their associated tolerances -continued

The specific volumes(upper figure) and their associated tolerances(lower figure) are given in dm<sup>3</sup>/kg

Pressure MPa	Temperature, K (IPTS-68)											
	273.15	298.15	323.15	348.15	373.15	398.15	423.15	448.15	473.15	523.15	573.15	623.15
360.	0.887 0.008	0.8958 0.0016	0.9054 0.0017	0.9160 0.0017	0.9275 0.0017	0.9396 0.0017	0.9526 0.0018	0.9664 0.0019	0.9813 0.0020	1.0132 0.0024	1.0488 0.0029	1.0880 0.0034
380.	0.883 0.009	0.8918 0.0017	0.9013 0.0017	0.9119 0.0017	0.9233 0.0018	0.9352 0.0018	0.9478 0.0018	0.9613 0.0019	0.9759 0.0020	1.0069 0.0025	1.0413 0.0030	1.0790 0.0035
400.	0.880 0.010	0.8879 0.0017	0.8973 0.0017	0.9078 0.0017	0.9191 0.0018	0.9308 0.0018	0.9432 0.0019	0.9564 0.0019	0.9707 0.0020	1.0009 0.0025	1.0341 0.0031	1.0700 0.0036
450.	0.871 0.015	0.8788 0.0017	0.8881 0.0018	0.8984 0.0018	0.9093 0.0018	0.9205 0.0019	0.9323 0.0019	0.9449 0.0020	0.9583 0.0023	0.9867 0.0027	1.0170 0.0032	1.0500 0.0038
500.	0.863 0.015	0.8702 0.0018	0.8795 0.0018	0.8896 0.0019	0.9002 0.0019	0.9110 0.0019	0.9222 0.0020	0.9340 0.0022	0.9468 0.0025	0.9735 0.0030	1.0020 0.0036	1.033 0.004
550.	0.855 0.020	0.8620 0.0018	0.8715 0.0019	0.8814 0.0019	0.8915 0.0020	0.9020 0.0021	0.9128 0.0021	0.9241 0.0023	0.9361 0.0026	0.9614 0.0032	0.9880 0.0039	1.017 0.005
600.	0.848 0.020	0.8541 0.0018	0.8639 0.0019	0.8737 0.0020	0.8834 0.0021	0.8936 0.0022	0.9040 0.0022	0.9148 0.0024	0.9263 0.0027	0.9501 0.0033	0.975 0.004	1.003 0.005
650.	0.842 0.020	0.8465 0.0018	0.8567 0.0019	0.8664 0.0021	0.8759 0.0022	0.8857 0.0022	0.8958 0.0023	0.9062 0.0025	0.9171 0.0027	0.9398 0.0033	0.964 0.004	0.990 0.005
700.		0.8393 0.0018	0.8499 0.0019	0.8596 0.0021	0.8687 0.0022	0.8782 0.0023	0.8879 0.0024	0.8980 0.0025	0.9086 0.0027	0.9304 0.0033	0.953 0.004	0.978 0.005
750.		0.8326 0.0018	0.8435 0.0020	0.8532 0.0021	0.8620 0.0022	0.8712 0.0023	0.8806 0.0024	0.8903 0.0025	0.9007 0.0027	0.9215 0.0033	0.943 0.004	0.967 0.005
800.		0.8263 0.0019	0.8373 0.0021	0.8470 0.0022	0.8555 0.0023	0.8644 0.0024	0.8735 0.0025	0.8830 0.0027	0.8931 0.0029	0.9130 0.0035	0.934 0.004	0.956 0.005
850.		0.8200 0.0022	0.8310 0.0023	0.8410 0.0024	0.8490 0.0025	0.8580 0.0026	0.8660 0.0027	0.8760 0.0028	0.8860 0.0031	0.9050 0.0036	0.924 0.004	0.945 0.005
900.		0.8150 0.0024	0.8250 0.0025	0.8350 0.0026	0.8430 0.0027	0.8520 0.0028	0.8600 0.0028	0.8690 0.0030	0.8790 0.0032	0.8970 0.0037	0.916 0.004	0.936 0.005
950.			0.8200 0.0028	0.8300 0.0029	0.8380 0.0029	0.8460 0.0030	0.8540 0.0030	0.8630 0.0032	0.8720 0.0034	0.8900 0.0038	0.908 0.004	0.926 0.005
1000.			0.815 0.004	0.825 0.004	0.833 0.004	0.841 0.004	0.849 0.004	0.857 0.004	0.866 0.004	0.883 0.004	0.900 0.005	0.918 0.006

\*

At this point, the specific volume and associated tolerance are given for saturated water.  
The values for saturated steam are ( 1673.7 ± 1.2 ) dm<sup>3</sup>/kg.

\*\*

Except for this entry, the sign ( ± ) of the tolerance is omitted.

Table 1. The most probable specific volumes with their associated tolerances -continued

The specific volumes(upper figure) and their associated tolerances(lower figure) are given in dm<sup>3</sup>/kg

Pressure MPa	Temperature, K (IPTS-68)											
	648.15	673.15	698.15	723.15	748.15	773.15	823.15	873.15	923.15	973.15	1023.15	1073.15
0.101325	2947.7 ±1.5**	3062.0 1.5	3176.3 1.6	3290.5 1.6	3404.4 1.7	3518.8 1.8	3747.1 1.9	3975.2 2.0	4203.2 2.0	4431.2 2.0	4659.2 2.0	4887.1 2.0
0.5	593.68 0.36	617.23 0.37	640.72 0.38	664.2 0.4	687.6 0.4	710.9 0.4	757.5 0.4	804.0 0.4	850.5 0.4	896.9 0.4	943.3 0.4	989.6 0.4
1.0	294.52 0.20	306.53 0.20	318.49 0.20	330.39 0.20	342.25 0.20	354.06 0.20	377.60 0.20	401.06 0.20	424.44 0.20	447.78 0.20	471.09 0.20	494.35 0.20
2.5	114.93 0.09	120.05 0.10	125.10 0.10	130.09 0.10	135.03 0.10	139.93 0.10	149.64 0.10	159.24 0.10	168.78 0.10	178.28 0.10	187.74 0.10	197.16 0.10
5.0	54.92 0.08	57.80 0.09	60.58 0.09	63.28 0.09	65.92 0.09	68.53 0.10	73.63 0.10	78.61 0.10	83.52 0.10	88.41 0.10	93.26 0.10	98.07 0.10
7.5	34.76 0.05	36.93 0.06	38.99 0.06	40.95 0.06	42.85 0.07	44.70 0.07	48.28 0.07	51.74 0.08	55.12 0.08	58.48 0.08	61.79 0.08	65.05 0.08
10.0	24.533 0.037	26.41 0.04	28.13 0.04	29.74 0.04	31.28 0.06	32.76 0.06	35.60 0.07	38.31 0.07	40.92 0.07	43.51 0.07	46.05 0.07	48.55 0.07
12.5	18.248 0.027	20.007 0.030	21.564 0.032	22.980 0.034	24.320 0.039	25.59 0.05	27.99 0.05	30.25 0.05	32.41 0.05	34.54 0.05	36.61 0.05	38.65 0.05
15.0	13.890 0.025	15.653 0.023	17.135 0.026	18.451 0.028	19.660 0.031	20.790 0.037	22.91 0.04	24.87 0.04	26.74 0.04	28.56 0.04	30.32 0.05	32.05 0.05
17.5	10.556 0.023	12.452 0.020	13.921 0.022	15.181 0.023	16.313 0.026	17.361 0.031	19.280 0.039	21.03 0.04	22.69 0.04	24.29 0.04	25.84 0.05	27.35 0.05
20.0	7.672 0.018	9.947 0.018	11.463 0.021	12.702 0.021	13.788 0.022	14.774 0.027	16.549 0.030	18.156 0.055	19.65 0.04	21.09 0.04	22.48 0.05	23.82 0.05
22.5	2.44 0.05	7.866 0.016	9.503 0.017	10.750 0.019	11.809 0.020	12.753 0.023	14.422 0.025	15.914 0.030	17.295 0.035	18.60 0.04	19.86 0.05	21.08 0.05
25.0	1.980 0.005	6.002 0.013	7.883 0.015	9.166 0.017	10.214 0.018	11.129 0.020	12.720 0.020	14.121 0.020	15.400 0.030	16.618 0.035	17.77 0.04	18.89 0.05
27.5	1.8623 0.0034	4.181 0.020	6.503 0.012	7.849 0.014	8.899 0.016	9.797 0.018	11.329 0.020	12.657 0.020	13.860 0.030	14.990 0.030	16.069 0.035	17.10 0.04
30.0	1.7917 0.0026	2.794 0.014	5.301 0.010	6.735 0.012	7.795 0.014	8.682 0.016	10.168 0.018	11.438 0.020	12.581 0.020	13.640 0.030	14.651 0.035	15.61 0.04
35.	1.7009 0.0020	2.106 0.004	3.426 0.008	4.958 0.009	6.052 0.011	6.927 0.012	8.342 0.015	9.519 0.017	10.562 0.020	11.520 0.025	12.410 0.030	13.276 0.035
40.	1.6406 0.0017	1.9101 0.0031	2.535 0.005	3.691 0.006	4.761 0.008	5.620 0.010	6.980 0.014	8.066 0.016	9.053 0.018	9.931 0.020	10.740 0.025	11.520 0.030
45.	1.5955 0.0015	1.8029 0.0022	2.1860 0.0033	2.912 0.005	3.820 0.007	4.633 0.008	5.934 0.010	6.981 0.010	7.886 0.015	8.700 0.018	9.454 0.020	10.160 0.030
50.	1.5592 0.0014	1.7304 0.0018	2.0081 0.0025	2.4860 0.0038	3.173 0.005	3.892 0.007	5.116 0.010	6.107 0.010	6.959 0.014	7.721 0.018	8.421 0.018	9.070 0.025
55.	1.5291 0.0014	1.6762 0.0017	1.8956 0.0024	2.2410 0.0033	2.749 0.005	3.347 0.006	4.469 0.008	5.404 0.008	6.208 0.012	6.925 0.018	7.581 0.018	8.196 0.020
60.	1.5032 0.0013	1.6330 0.0016	1.8158 0.0022	2.0840 0.0030	2.470 0.004	2.954 0.005	3.956 0.007	4.832 0.008	5.591 0.010	6.268 0.016	6.886 0.018	7.464 0.018

Table 1. The most probable specific volumes with their associated tolerances -continued

The specific volumes(upper figure) and their associated tolerances(lower figure) are given in dm<sup>3</sup>/kg

Pressure MPa	Temperature, K (IPTS-68)											
	648.15	673.15	698.15	723.15	748.15	773.15	823.15	873.15	923.15	973.15	1023.15	1073.15
65.	1.4805	1.5970	1.7546	1.9747	2.2800	2.671	3.549	4.362	5.078	5.718	6.303	6.848
	0.0013	0.0015	0.0021	0.0028	0.0036	0.005	0.007	0.008	0.010	0.015	0.018	0.018
70.	1.4604	1.5664	1.7054	1.8922	2.1430	2.463	3.226	3.975	4.648	5.253	5.807	6.323
	0.0012	0.0015	0.0020	0.0026	0.0034	0.004	0.006	0.007	0.009	0.010	0.015	0.018
75.	1.4423	1.5398	1.6646	1.8271	2.0390	2.308	2.969	3.653	4.284	4.857	5.383	5.872
	0.0012	0.0015	0.0020	0.0025	0.0033	0.004	0.006	0.007	0.008	0.010	0.014	0.018
80.	1.4259	1.5164	1.6298	1.7740	1.9579	2.1870	2.762	3.385	3.975	4.516	5.016	5.481
	0.0012	0.0015	0.0020	0.0024	0.0031	0.0039	0.006	0.006	0.008	0.010	0.010	0.016
85.	1.4109	1.4953	1.5995	1.7294	1.8917	2.0910	2.595	3.160	3.710	4.222	4.696	5.139
	0.0013	0.0016	0.0020	0.0024	0.0030	0.0038	0.005	0.006	0.008	0.010	0.010	0.015
90.	1.3970	1.4763	1.5728	1.6912	1.8365	2.0130	2.458	2.971	3.483	3.966	4.417	4.839
	0.0014	0.0017	0.0020	0.0024	0.0029	0.0036	0.005	0.006	0.007	0.008	0.010	0.015
95.	1.3841	1.4590	1.5490	1.6578	1.7896	1.9477	2.344	2.810	3.286	3.742	4.170	4.573
	0.0015	0.0018	0.0021	0.0024	0.0029	0.0035	0.005	0.006	0.006	0.008	0.010	0.014
100.	1.3720	1.4430	1.5274	1.6282	1.7488	1.8919	2.248	2.672	3.115	3.545	3.952	4.336
	0.0016	0.0019	0.0021	0.0024	0.0028	0.0034	0.005	0.005	0.006	0.007	0.010	0.013
110.	1.3500	1.4143	1.4897	1.5779	1.6813	1.8018	2.096	2.452	2.835	3.217	3.585	3.935
	0.0016	0.0019	0.0022	0.0024	0.0027	0.0032	0.005	0.005	0.006	0.007	0.010	0.012
120.	1.3305	1.3895	1.4578	1.5365	1.6273	1.7315	1.983	2.285	2.619	2.959	3.291	3.612
	0.0017	0.0020	0.0022	0.0025	0.0027	0.0031	0.005	0.005	0.006	0.007	0.009	0.011
130.	1.3129	1.3677	1.4303	1.5015	1.5827	1.6748	1.893	2.155	2.447	2.751	3.053	3.347
	0.0018	0.0020	0.0023	0.0025	0.0027	0.0030	0.005	0.005	0.006	0.007	0.009	0.010
140.	1.2970	1.3482	1.4061	1.4713	1.5448	1.6273	1.821	2.051	2.310	2.582	2.857	3.126
	0.0018	0.0021	0.0023	0.0025	0.0027	0.0030	0.005	0.005	0.006	0.007	0.008	0.009
150.	1.2825	1.3306	1.3845	1.4447	1.5120	1.5869	1.760	1.966	2.196	2.442	2.692	2.941
	0.0019	0.0021	0.0023	0.0025	0.0027	0.0030	0.004	0.005	0.006	0.007	0.008	0.009
160.	1.2691	1.3145	1.3650	1.4210	1.4831	1.5519	1.710	1.894	2.102	2.324	2.553	2.782
	0.0019	0.0021	0.0023	0.0025	0.0027	0.0030	0.004	0.005	0.006	0.007	0.007	0.008
170.	1.2567	1.2996	1.3472	1.3996	1.4573	1.5210	1.665	1.834	2.022	2.225	2.435	2.647
	0.0019	0.0021	0.0023	0.0025	0.0027	0.0030	0.004	0.005	0.006	0.007	0.007	0.008
180.	1.2450	1.2858	1.3309	1.3801	1.4341	1.4934	1.627	1.781	1.953	2.139	2.332	2.529
	0.0019	0.0022	0.0023	0.0025	0.0027	0.0030	0.004	0.005	0.006	0.007	0.007	0.008
190.	1.2341	1.2730	1.3157	1.3622	1.4129	1.4685	1.593	1.735	1.893	2.064	2.243	2.426
	0.0019	0.0022	0.0023	0.0025	0.0027	0.0030	0.004	0.005	0.006	0.007	0.007	0.008
200.	1.2239	1.2609	1.3013	1.3454	1.3934	1.4456	1.562	1.694	1.840	1.998	2.165	2.336
	0.0019	0.0022	0.0023	0.0025	0.0027	0.0030	0.004	0.005	0.006	0.007	0.008	0.009
220.	1.2049	1.2387	1.2752	1.3152	1.3580	1.4050	1.508	1.625	1.752	1.889	2.034	2.184
	0.0020	0.0022	0.0029	0.0030	0.0031	0.0032	0.004	0.005	0.006	0.007	0.008	0.010
240.	1.1878	1.2190	1.2520	1.2890	1.3280	1.370	1.463	1.568	1.680	1.800	1.928	2.061
	0.0022	0.0025	0.0029	0.0034	0.0035	0.004	0.004	0.005	0.006	0.007	0.008	0.010
260.	1.1724	1.2010	1.2320	1.2660	1.3030	1.341	1.426	1.519	1.619	1.727	1.841	1.960
	0.0026	0.0028	0.0030	0.0035	0.0035	0.004	0.004	0.005	0.006	0.007	0.008	0.010
280.	1.1584	1.1860	1.2150	1.2460	1.2800	1.316	1.393	1.478	1.569	1.666	1.770	1.877
	0.0029	0.0032	0.0034	0.0036	0.0038	0.004	0.005	0.005	0.006	0.007	0.008	0.010
300.	1.1451	1.1710	1.1980	1.228	1.260	1.293	1.364	1.442	1.525	1.615	1.710	1.808
	0.0032	0.0036	0.0038	0.004	0.004	0.004	0.005	0.005	0.006	0.007	0.008	0.010
320.	1.1320	1.1570	1.183	1.211	1.241	1.272	1.338	1.410	1.488	1.571	1.658	1.748
	0.0035	0.0038	0.004	0.004	0.005	0.005	0.005	0.006	0.006	0.007	0.008	0.010
340.	1.1210	1.145	1.170	1.196	1.224	1.254	1.315	1.382	1.454	1.531	1.612	1.696
	0.0036	0.004	0.004	0.005	0.005	0.005	0.005	0.006	0.006	0.007	0.008	0.010

Table 1. The most probable specific volumes with their associated tolerances -continued  
 The specific volumes(upper figure) and their associated tolerances(lower figure) are given in dm<sup>3</sup>/kg

Pressure MPa	Temperature, K (IPTS-68)											
	648.15	673.15	698.15	723.15	748.15	773.15	823.15	873.15	923.15	973.15	1023.15	1073.15
360.	1.1100 0.0038	1.133 0.004	1.157 0.005	1.182 0.005	1.209 0.005	1.236 0.005	1.294 0.005	1.357 0.006	1.424 0.006	1.496 0.007	1.572 0.008	1.650 0.011
380.	1.1000 0.0039	1.122 0.004	1.145 0.005	1.169 0.005	1.194 0.005	1.220 0.005	1.275 0.006	1.334 0.006	1.398 0.006	1.465 0.007	1.536 0.008	1.610 0.011
400.	1.090 0.004	1.111 0.004	1.134 0.005	1.157 0.005	1.181 0.005	1.205 0.005	1.257 0.006	1.314 0.006	1.374 0.006	1.437 0.007	1.504 0.008	1.572 0.011
450.	1.069 0.004	1.087 0.005	1.108 0.005	1.130 0.005	1.151 0.005	1.172 0.006	1.218 0.006	1.268 0.006	1.321 0.006	1.376 0.007	1.433 0.008	1.492 0.011
500.	1.049 0.005	1.067 0.005	1.086 0.005	1.106 0.006	1.125 0.006	1.145 0.006	1.186 0.007	1.231 0.007	1.278 0.007	1.327 0.008	1.377 0.008	1.429 0.011
550.	1.032 0.005	1.049 0.006	1.067 0.006	1.086 0.008	1.103 0.008	1.120 0.008	1.158 0.008	1.199 0.009	1.241 0.009	1.286 0.009	1.332 0.010	1.379 0.011
600.	1.017 0.006	1.033 0.006	1.050 0.007	1.067 0.008	1.083 0.009	1.099 0.009	1.134 0.009	1.171 0.009	1.210 0.010	1.251 0.010	1.293 0.010	1.335 0.012
650.	1.004 0.006	1.018 0.007	1.034 0.007	1.050 0.008	1.065 0.009	1.081 0.009	1.113 0.009	1.147 0.010	1.183 0.011	1.220 0.011	1.258 0.011	1.297 0.012
700.	0.992 0.006	1.005 0.007	1.020 0.007	1.034 0.008	1.048 0.009	1.063 0.009	1.093 0.010	1.125 0.011	1.159 0.012	1.193 0.012	1.228 0.013	1.263 0.013
750.	0.980 0.006	0.993 0.007	1.007 0.008	1.020 0.009	1.033 0.009	1.047 0.009	1.075 0.010	1.105 0.012	1.137 0.013	1.169 0.014	1.201 0.014	1.235 0.015
800.	0.968 0.006	0.980 0.007	0.993 0.008	1.006 0.009	1.018 0.009	1.031 0.009	1.057 0.010	1.086 0.012	1.116 0.015	1.147 0.016	1.178 0.017	1.209 0.019
850.	0.956 0.006	0.968 0.007	0.980 0.008	0.992 0.009	1.004 0.009	1.016 0.010	1.040 0.010	1.067 0.012	1.097 0.016	1.126 0.017	1.155 0.017	1.185 0.019
900.	0.946 0.006	0.956 0.007	0.968 0.008	0.979 0.009	0.991 0.009	1.002 0.010	1.026 0.011	1.051 0.012	1.079 0.016	1.106 0.016	1.134 0.017	1.161 0.019
950.	0.936 0.006	0.946 0.007	0.956 0.008	0.967 0.009	0.979 0.009	0.990 0.010	1.013 0.011	1.036 0.013	1.063 0.016	1.088 0.016	1.114 0.017	1.140 0.019
1000.	0.927 0.007	0.936 0.009	0.946 0.009	0.957 0.010	0.968 0.010	0.979 0.010	1.000 0.012	1.022 0.015	1.047 0.016	1.071 0.019	1.096 0.022	1.120 0.022

\*\*

Except for this entry, the sign ( ± ) of the tolerance is omitted.

Table 2. The most probable specific enthalpies with their associated tolerances

The specific enthalpies(upper figure) and their associated tolerances(lower figure) are given in kJ/kg

Pressure MPa	Temperature, K (IPTS-68)											
	273.15	298.15	323.15	348.15	373.15	398.15	423.15	448.15	473.15	523.15	573.15	623.15
0.101325	0.06 ±0.01**	104.86 0.07	209.33 0.10	313.97 0.11	419.07* 0.14	2726.1 2.0	2775.7 2.0	2824.8 2.0	2874.3 2.0	2973.6 2.0	3073.7 3.0	3175.0 3.0
0.5	0.47 0.01	105.23 0.10	209.67 0.16	314.29 0.16	419.34 0.20	525.11 0.33	632.0 0.5	2800.1 2.0	2854.4 2.0	2959.8 3.0	3063.0 3.6	3167. 4.
1.0	0.98 0.01	105.69 0.12	210.10 0.19	314.69 0.28	419.71 0.33	525.48 0.35	632.3 0.5	740.9 0.7	2826.9 2.0	2941.5 3.0	3050.0 3.9	3157. 4.
2.5	2.50 0.01	107.08 0.15	211.40 0.19	315.90 0.28	420.84 0.33	526.5 0.4	633.3 0.5	741.7 0.7	852.4 0.9	2879. 4.	3007. 4.	3125. 4.
5.0	5.04 0.03	109.38 0.16	213.55 0.19	317.92 0.28	422.72 0.33	528.2 0.4	634.8 0.5	743.0 0.7	853.4 0.9	1085.4 1.8	2923. 4.	3067. 4.
7.5	7.57 0.04	111.69 0.16	215.70 0.19	319.94 0.28	424.60 0.34	530.0 0.4	636.4 0.5	744.3 0.7	854.5 0.9	1085.4 1.8	2813. 4.	3000. 4.
10.0	10.09 0.05	113.98 0.17	217.85 0.19	321.95 0.29	426.49 0.34	531.7 0.4	637.9 0.5	745.7 0.7	855.5 0.9	1085.5 1.8	1342.9 2.0	2922. 4.
12.5	12.59 0.06	116.28 0.17	220.00 0.19	323.97 0.29	428.38 0.34	533.4 0.4	639.5 0.5	747.1 0.7	856.6 0.9	1085.6 1.8	1340.2 2.0	2825. 4.
15.0	15.09 0.07	118.57 0.17	222.14 0.20	325.98 0.29	430.26 0.34	535.2 0.4	641.1 0.5	748.4 0.7	857.8 0.9	1085.8 1.8	1337.9 2.0	2691. 5.
17.5	17.58 0.08	120.85 0.18	224.28 0.30	328.00 0.30	432.15 0.34	536.9 0.4	642.7 0.5	749.8 0.7	858.9 0.9	1086.1 1.8	1335.8 2.0	1662.2 3.0
20.0	20.06 0.10	123.13 0.18	226.43 0.30	330.01 0.30	434.04 0.34	538.7 0.4	644.3 0.5	751.2 0.7	860.0 0.9	1086.4 1.8	1334.0 2.0	1645.6 3.0
22.5	22.53 0.11	125.41 0.18	228.56 0.30	332.03 0.30	435.94 0.34	540.5 0.4	645.9 0.5	752.6 0.7	861.2 0.9	1086.7 1.8	1332.3 2.0	1633.3 3.0
25.0	25.00 0.12	127.68 0.19	230.70 0.30	334.04 0.30	437.83 0.35	542.2 0.4	647.5 0.5	754.1 0.7	862.4 0.9	1087.1 1.8	1330.9 2.0	1623.4 3.0
27.5	27.45 0.13	129.95 0.19	232.84 0.30	336.06 0.30	439.72 0.35	544.0 0.4	649.1 0.5	755.5 0.7	863.6 0.9	1087.6 1.8	1329.6 2.0	1615.3 3.0
30.0	29.90 0.15	132.21 0.19	234.97 0.30	338.07 0.30	441.62 0.35	545.7 0.4	650.7 0.5	756.9 0.7	864.8 0.9	1088.1 1.8	1328.5 2.0	1608.4 3.0
35.	34.76 0.17	136.73 0.25	239.23 0.30	342.10 0.30	445.41 0.35	549.3 0.4	654.0 0.5	759.8 0.7	867.3 0.9	1089.2 1.8	1326.6 2.0	1597.2 3.0
40.	39.60 0.19	141.23 0.26	243.48 0.30	346.12 0.30	449.20 0.36	552.8 0.4	657.3 0.5	762.8 0.7	869.8 0.9	1090.4 1.8	1325.3 2.0	1588.5 3.0
45.	44.40 0.22	145.71 0.29	247.72 0.30	350.14 0.30	453.00 0.36	556.4 0.4	660.6 0.5	765.8 0.7	872.4 0.9	1091.8 1.8	1324.3 2.0	1581.4 3.0
50.	49.17 0.24	150.17 0.31	251.95 0.30	354.16 0.30	456.80 0.36	560.0 0.4	663.9 0.5	768.8 0.7	875.0 0.9	1093.3 1.8	1323.6 2.0	1575.7 3.0
55.	53.91 0.27	154.63 0.34	256.18 0.30	358.18 0.30	460.60 0.36	563.6 0.4	667.2 0.5	771.8 0.7	877.7 0.9	1094.9 1.8	1323.2 2.0	1571.0 2.9
60.	58.62 0.29	159.06 0.36	260.40 0.35	362.20 0.35	464.40 0.37	567.2 0.4	670.6 0.5	774.9 0.7	880.4 0.9	1096.6 1.8	1323.1 2.0	1567.1 2.9

THERMODYNAMIC PROPERTIES OF WATER

Table 2. The most probable specific enthalpies with their associated tolerances -continued

The specific enthalpies(upper figure) and their associated tolerances(lower figure) are given in kJ/kg

Pressure MPa	Temperature, K (IPTS-68)											
	273.15	298.15	323.15	348.15	373.15	398.15	423.15	448.15	473.15	523.15	573.15	623.15
65.	63.30	163.48	264.60	366.20	468.20	570.8	673.9	777.9	883.1	1098.4	1323.2	1563.9
	0.31	0.39	0.35	0.35	0.37	0.4	0.5	0.7	0.9	1.8	2.0	2.9
70.	67.96	167.9	268.8	370.2	472.1	574.4	677.3	781.0	885.9	1100.3	1323.6	1561.2
	0.34	0.4	0.5	0.5	0.5	0.5	0.5	0.7	0.9	1.8	2.0	3.0
75.	72.60	172.3	273.0	374.2	475.9	578.0	680.7	784.2	888.7	1102.3	1324.1	1559.1
	0.36	0.4	0.6	0.6	0.5	0.5	0.5	0.8	0.9	1.8	2.0	3.0
80.	77.20	176.7	277.2	378.2	479.7	581.6	684.1	787.3	891.6	1104.3	1324.7	1557.3
	0.38	0.4	0.6	0.6	0.7	0.7	0.7	0.8	0.9	1.8	2.0	3.0
85.	81.8	181.0	281.4	382.2	483.5	585.2	687.5	790.5	894.5	1106.4	1325.6	1555.9
	0.4	0.4	0.6	0.7	0.8	0.8	0.8	0.9	1.0	1.8	2.0	3.0
90.	86.3	185.4	285.5	386.2	487.3	588.9	690.9	793.7	897.4	1108.5	1326.5	1554.8
	0.4	0.4	0.7	0.7	0.9	0.9	0.9	1.0	1.0	1.8	2.0	3.0
95.	90.9	189.7	289.7	390.2	491.2	592.5	694.4	796.9	900.3	1110.8	1327.6	1554.1
	0.4	0.4	0.7	0.8	1.0	1.0	1.0	1.1	1.3	1.9	2.5	3.2
100.	95.4	194.0	293.9	394.2	495.0	596.1	697.8	800.1	903.3	1113.0	1328.8	1553.5
	0.4	0.4	0.7	0.8	1.1	1.1	1.2	1.5	1.5	2.0	2.8	3.3
110.	104.4	202.6	302.2	402.2	502.6	603.4	704.7	806.6	909.3	1117.7	1331.6	1553.2
	0.6	0.5	0.7	0.9	1.2	1.3	1.5	1.7	1.9	2.4	3.0	3.4
120.	113.3	211.2	310.4	410.1	510.3	610.7	711.7	813.1	915.3	1122.6	1334.7	1553.1
	0.6	0.5	0.7	1.0	1.2	1.4	1.6	1.8	2.2	2.6	3.1	3.5
130.	122.1	219.7	318.6	418.1	517.9	618.1	718.6	819.7	921.5	1127.7	1338.1	1554.1
	0.7	0.7	0.8	1.0	1.3	1.4	1.8	1.9	2.3	2.7	3.2	3.5
140.	130.9	228.2	326.9	426.0	525.6	625.4	725.6	826.3	927.7	1132.9	1341.8	1555.7
	0.7	0.7	0.8	1.0	1.3	1.5	1.8	2.0	2.3	2.7	3.2	3.6
150.	139.6	236.6	335.0	433.9	533.2	632.7	732.6	832.9	933.9	1138.2	1345.8	1557.7
	0.8	0.7	0.8	1.0	1.3	1.5	1.8	2.0	2.3	2.8	3.2	3.6
160.	148.2	244.9	343.2	441.8	540.8	640.1	739.7	839.7	940.3	1143.6	1350.0	1560.1
	1.0	0.7	0.8	1.1	1.3	1.6	1.8	2.1	2.3	2.8	3.3	3.6
170.	156.8	253.3	351.3	449.7	548.5	647.4	746.8	846.4	946.7	1149.1	1354.4	1562.9
	1.1	0.7	0.8	1.1	1.3	1.6	1.8	2.1	2.3	2.8	3.3	3.6
180.	165.3	261.6	359.4	457.6	556.1	654.8	753.9	853.2	953.1	1154.8	1358.9	1565.9
	1.1	0.7	0.9	1.1	1.4	1.6	1.8	2.1	2.3	2.8	3.3	3.6
190.	173.8	269.9	367.5	465.5	563.7	662.2	761.0	860.0	959.7	1160.5	1363.6	1569.3
	1.2	0.8	0.9	1.1	1.4	1.6	1.9	2.1	2.4	2.8	3.3	3.6
200.	182.2	278.1	375.6	473.3	571.4	669.6	768.1	866.9	966.2	1166.3	1368.5	1572.8
	1.4	1.0	1.0	1.1	1.4	1.6	1.9	2.1	2.4	2.8	3.3	3.6
220.	198.9	294.5	391.6	489.0	586.6	684.4	782.4	880.7	979.4	1178.2	1378.6	1580.7
	1.8	1.1	1.1	1.2	1.4	1.7	1.9	2.2	2.4	2.9	3.4	3.7
240.	215.5	310.7	407.6	504.6	601.8	699.1	796.8	894.5	992.8	1190.3	1389.1	1589.2
	2.1	1.3	1.3	1.4	1.6	1.8	2.2	2.2	2.4	2.9	3.4	3.7
260.	232.0	326.9	423.5	520.2	617.0	713.9	811.2	908.5	1006.2	1202.7	1400.1	1598.4
	2.7	1.4	1.4	1.5	1.7	2.0	2.3	2.3	2.5	2.9	3.4	3.7
280.	248.4	342.9	439.3	535.7	632.2	728.7	825.6	922.5	1019.8	1215.2	1411.3	1608.1
	3.7	1.8	1.6	1.6	1.8	2.0	2.3	2.5	2.7	3.0	3.4	3.7
300.	265.	358.8	455.0	551.1	647.3	743.5	840.0	936.6	1033.4	1227.9	1422.9	1618.2
	5.	2.0	1.8	1.8	1.8	2.1	2.4	2.7	2.8	3.0	3.5	3.8
320.	281.	374.7	470.7	566.6	662.5	758.3	854.5	950.7	1047.2	1240.8	1434.8	1628.7
	7.	2.1	1.8	1.8	1.9	2.1	2.4	2.7	2.8	3.1	3.5	3.8
340.	297.	390.5	486.3	581.9	677.6	773.1	868.9	964.8	1061.0	1253.8	1446.8	1639.6
	9.	2.1	1.9	1.9	1.9	2.2	2.5	2.8	2.9	3.1	3.5	3.8

Table 2. The most probable specific enthalpies with their associated tolerances -continued

The specific enthalpies(upper figure) and their associated tolerances(lower figure) are given in kJ/kg

Pressure MPa	Temperature, K (IPTS-68)											
	273.15	298.15	323.15	348.15	373.15	398.15	423.15	448.15	473.15	523.15	573.15	623.15
360.	314. 11.	406.2 2.2	501.8 2.0	597.2 2.0	692.6 2.0	787.9 2.2	883.4 2.5	979.0 2.8	1074.8 2.9	1266.9 3.1	1459.0 3.6	1650.7 3.8
380.	330. 13.	421.8 2.5	517.3 2.0	612.5 2.0	707.7 2.0	802.7 2.3	897.9 2.6	993.2 2.8	1088.7 3.0	1280.1 3.2	1471.4 3.6	1662.2 3.9
400.	346. 15.	437.4 3.0	532.7 2.1	627.8 2.1	722.7 2.1	817.4 2.3	912.4 2.6	1007.5 2.9	1102.7 3.0	1293.4 3.2	1484.0 3.6	1673.8 3.9
450.	387. 19.	476. 4.	570.9 2.2	665.7 2.2	760.1 2.2	854.2 2.4	948.6 2.7	1043.2 3.0	1137.7 3.1	1327.0 3.3	1516.0 3.7	1704. 4.
500.	428. 25.	514. 5.	608.8 3.0	703.4 2.3	797.3 2.3	890.9 2.5	984.8 2.8	1078.9 3.1	1173.0 3.2	1361.1 3.4	1548.7 3.8	1735. 4.
550.	469. 33.	552. 6.	646.3 3.2	740.8 2.4	834.4 2.4	927.6 2.6	1021.0 2.9	1114.7 3.2	1208.3 3.3	1395.4 3.4	1581.7 3.9	1767. 4.
600.	510. 41.	590. 7.	683.4 3.4	778.0 2.5	871.3 2.5	964.1 2.8	1057.1 3.0	1150.6 3.3	1243.7 3.4	1430.0 3.5	1615.3 3.9	1799. 4.
650.	550. 50.	627. 8.	720. 4.	814.9 2.7	908.1 2.7	1000.4 3.0	1093.1 3.2	1186.4 3.4	1279.2 3.6	1464.8 3.7	1649. 4.	1832. 4.
700.		663. 9.	756. 5.	852. 4.	944.7 3.5	1036.7 3.4	1129.0 3.4	1222.2 3.6	1314.8 3.7	1499.6 3.8	1683. 4.	1866. 4.
750.		700. 10.	792. 6.	888. 5.	981.2 3.9	1073.0 3.8	1165.0 3.8	1258.0 3.9	1350.2 3.9	1534.6 3.9	1718. 4.	1899. 4.
800.		736. 12.	828. 7.	924. 6.	1017. 5.	1109. 5.	1201. 5.	1294. 4.	1386. 4.	1570. 4.	1752. 4.	1933. 4.
850.		772. 14.	862. 8.	960. 6.	1054. 6.	1145. 6.	1236. 5.	1329. 4.	1421. 4.	1605. 4.	1787. 4.	1967. 4.
900.		808. 16.	897. 9.	996. 7.	1089. 7.	1181. 7.	1272. 5.	1365. 4.	1457. 4.	1640. 4.	1821. 4.	2002. 4.
950.			931. 10.	1031. 8.	1125. 8.	1216. 7.	1307. 5.	1401. 4.	1492. 4.	1675. 4.	1856. 4.	2036. 4.
1000.			965. 15.	1066. 10.	1161. 9.	1252. 8.	1343. 6.	1436. 5.	1527. 5.	1710. 5.	1891. 5.	2071. 5.

\*

At this point, the specific enthalpy and associated tolerance are given for saturated water.  
The values for saturated steam are ( 2675.8 ± 1.6 ) kJ/kg.

\*\*

Except for this entry, the sign ( ± ) of the tolerance is omitted.



Table 2. The most probable specific enthalpies with their associated tolerances -continued

The specific enthalpies(upper figure) and their associated tolerances(lower figure) are given in kJ/kg

Pressure MPa	Temperature, K (IPTS-68)											
	648.15	673.15	698.15	723.15	748.15	773.15	823.15	873.15	923.15	973.15	1023.15	1073.15
0.101325	3226.2 ±3.0**	3277.7 3.0	3329.7 3.0	3382.0 3.0	3434.7 3.0	3487.9 3.0	3595.4 3.0	3704.7 3.0	3815.7 3.8	3928.5 3.9	4043. 4.	4159. 4.
0.5	3219. 4.	3271. 4.	3324. 4.	3377. 4.	3430. 4.	3484. 4.	3592. 4.	3702. 4.	3813. 4.	3926. 4.	4041. 4.	4157. 4.
1.0	3210. 4.	3263. 4.	3317. 4.	3370. 4.	3424. 4.	3478. 4.	3587. 5.	3693. 5.	3810. 5.	3923. 5.	4038. 6.	4155. 6.
2.5	3182. 4.	3239. 4.	3295. 4.	3350. 4.	3406. 4.	3462. 4.	3574. 5.	3685. 5.	3800. 5.	3915. 5.	4031. 6.	4149. 6.
5.0	3132. 4.	3195. 4.	3256. 4.	3316. 4.	3375. 4.	3434. 4.	3550. 5.	3665. 5.	3783. 5.	3900. 5.	4018. 6.	4137. 6.
7.5	3077. 4.	3147. 4.	3215. 4.	3279. 4.	3342. 4.	3404. 4.	3526. 5.	3646. 5.	3765. 5.	3885. 5.	4005. 6.	4126. 6.
10.0	3014. 4.	3095. 4.	3170. 4.	3241. 4.	3308. 4.	3374. 4.	3501. 5.	3623. 5.	3748. 5.	3870. 6.	3992. 6.	4114. 8.
12.5	2942. 4.	3038. 4.	3122. 4.	3200. 4.	3273. 4.	3342. 5.	3476. 5.	3604. 5.	3730. 7.	3855. 7.	3979. 8.	4103. 10.
15.0	2858. 4.	2974. 4.	3071. 4.	3156. 4.	3235. 4.	3309. 5.	3449. 6.	3583. 6.	3712. 7.	3839. 8.	3965. 8.	4091. 10.
17.5	2751. 4.	2901. 4.	3014. 4.	3110. 4.	3196. 4.	3275. 5.	3422. 6.	3561. 7.	3693. 8.	3824. 9.	3952. 9.	4080. 11.
20.0	2601. 5.	2816. 5.	2952. 4.	3060. 4.	3154. 4.	3240. 5.	3395. 6.	3538. 8.	3675. 9.	3808. 9.	3938. 9.	4068. 11.
22.5	1966. 9.	2713. 5.	2883. 5.	3007. 5.	3111. 5.	3203. 5.	3367. 6.	3515. 8.	3656. 9.	3792. 10.	3925. 10.	4056. 12.
25.0	1849. 5.	2578. 5.	2805. 5.	2950. 5.	3065. 5.	3164. 5.	3338. 6.	3492. 8.	3637. 9.	3776. 10.	3911. 10.	4044. 13.
27.5	1814. 4.	2380. 5.	2716. 5.	2888. 5.	3017. 5.	3124. 5.	3308. 6.	3469. 8.	3618. 9.	3760. 10.	3897. 10.	4032. 13.
30.0	1791. 4.	2152. 4.	2613. 5.	2821. 5.	2966. 5.	3083. 5.	3278. 6.	3445. 8.	3598. 10.	3744. 10.	3884. 11.	4021. 13.
35.	1761.9 3.5	1988. 4.	2373. 5.	2672. 5.	2857. 5.	2997. 5.	3216. 6.	3397. 8.	3559. 10.	3711. 11.	3856. 12.	3997. 13.
40.	1742.1 3.4	1931. 4.	2198. 4.	2512. 5.	2741. 5.	2906. 5.	3153. 6.	3348. 8.	3520. 10.	3678. 11.	3828. 12.	3973. 13.
45.	1727.4 3.4	1897. 4.	2110. 4.	2377. 5.	2624. 5.	2813. 5.	3088. 6.	3299. 8.	3481. 10.	3646. 11.	3801. 12.	3949. 13.
50.	1716.0 3.4	1874. 4.	2060. 4.	2284. 5.	2520. 5.	2723. 5.	3024. 6.	3250. 8.	3441. 10.	3613. 11.	3773. 12.	3926. 13.
55.	1706.8 3.4	1857. 4.	2026. 4.	2223. 4.	2438. 5.	2641. 5.	2961. 6.	3202. 8.	3403. 10.	3581. 11.	3746. 12.	3902. 13.
60.	1699.3 3.4	1843. 4.	2001. 4.	2180. 4.	2375. 5.	2571. 5.	2901. 6.	3155. 8.	3364. 10.	3549. 11.	3719. 12.	3879. 13.

Table 2. The most probable specific enthalpies with their associated tolerances -continued

The specific enthalpies(upper figure) and their associated tolerances(lower figure) are given in kJ/kg

Pressure MPa	Temperature, K (IPTS-68)											
	648.15	673.15	698.15	723.15	748.15	773.15	823.15	873.15	923.15	973.15	1023.15	1073.15
65.	1693.0 3.4	1832. 4.	1982. 4.	2148. 4.	2328. 5.	2513. 5.	2845. 6.	3109. 8.	3327. 10.	3518. 11.	3693. 12.	3856. 13.
70.	1687.8 3.4	1822. 4.	1967. 4.	2123. 4.	2291. 5.	2466. 5.	2795. 6.	3066. 8.	3291. 10.	3488. 11.	3667. 12.	3834. 13.
75.	1683.4 3.5	1815. 4.	1954. 4.	2104. 4.	2262. 5.	2428. 5.	2749. 6.	3025. 8.	3256. 10.	3458. 11.	3641. 12.	3812. 13.
80.	1679.7 3.5	1808.3 3.9	1944. 4.	2087. 4.	2239. 5.	2397. 5.	2710. 6.	2987. 8.	3223. 10.	3430. 11.	3617. 12.	3791. 13.
85.	1676.5 3.5	1802.8 3.9	1935. 4.	2074. 4.	2220. 4.	2371. 5.	2675. 6.	2952. 8.	3192. 10.	3403. 11.	3593. 12.	3770. 13.
90.	1673.9 3.5	1798.0 3.9	1927. 4.	2063. 4.	2204. 4.	2349. 5.	2645. 6.	2920. 8.	3163. 10.	3377. 11.	3570. 12.	3750. 13.
95.	1671.7 3.5	1794.0 3.9	1921. 4.	2053. 4.	2190. 4.	2331. 5.	2618. 6.	2891. 8.	3135. 10.	3352. 11.	3548. 12.	3730. 13.
100.	1669.9 3.6	1790.5 3.9	1915. 4.	2045. 4.	2178. 4.	2316. 5.	2595. 6.	2864. 8.	3109. 10.	3327. 11.	3525. 12.	3710. 13.
110.	1667.3 3.7	1785.1 3.9	1906. 4.	2031. 4.	2159. 4.	2290. 5.	2557. 6.	2819. 8.	3063. 10.	3284. 11.	3486. 12.	3674. 13.
120.	1665.8 3.7	1781.2 3.9	1899. 4.	2021. 4.	2145. 4.	2271. 5.	2527. 6.	2781. 8.	3023. 10.	3245. 11.	3450. 12.	3640. 13.
130.	1665.2 3.7	1778.6 3.9	1894. 4.	2013. 4.	2133. 4.	2256. 5.	2504. 6.	2751. 8.	2989. 10.	3211. 11.	3418. 12.	3610. 13.
140.	1665.3 3.8	1777.0 3.9	1891. 4.	2007. 4.	2124. 4.	2244. 5.	2485. 6.	2726. 8.	2960. 10.	3181. 11.	3389. 12.	3582. 13.
150.	1666.0 3.8	1776.2 3.9	1888. 4.	2002. 4.	2118. 4.	2234. 5.	2469. 6.	2705. 8.	2935. 10.	3155. 11.	3363. 12.	3556. 13.
160.	1667.3 3.8	1776.2 3.9	1887. 4.	1999. 4.	2112. 4.	2226. 5.	2457. 6.	2688. 8.	2915. 10.	3133. 11.	3341. 12.	3534. 13.
170.	1669.1 3.8	1776.7 3.9	1886. 4.	1996. 4.	2108. 4.	2220. 5.	2447. 6.	2674. 8.	2898. 10.	3114. 11.	3321. 13.	3515. 13.
180.	1671.2 3.8	1777.8 3.9	1886. 4.	1995. 4.	2105. 4.	2216. 5.	2438. 6.	2662. 8.	2883. 10.	3097. 11.	3303. 12.	3497. 13.
190.	1673.7 3.8	1779.3 3.9	1886. 4.	1994. 4.	2103. 4.	2212. 5.	2432. 6.	2652. 8.	2870. 10.	3083. 11.	3288. 12.	3481. 13.
200.	1676.5 3.8	1781.2 3.9	1887. 4.	1994. 4.	2101. 4.	2209. 5.	2426. 6.	2644. 8.	2860. 10.	3071. 11.	3275. 12.	3467. 13.
220.	1682.9 3.8	1786.1 3.9	1890. 4.	1995. 4.	2101. 4.	2206. 5.	2418. 6.	2631. 8.	2843. 10.	3051. 11.	3252. 12.	3443. 13.
240.	1690.3 3.8	1792.2 3.9	1895. 4.	1998. 4.	2102. 4.	2206. 5.	2414. 6.	2623. 8.	2831. 10.	3036. 11.	3235. 12.	3424. 13.
260.	1698.4 3.8	1799.1 3.9	1900. 4.	2002. 4.	2105. 4.	2207. 5.	2412. 6.	2618. 8.	2823. 10.	3025. 11.	3223. 12.	3410. 13.
280.	1707.2 3.9	1806.9 3.9	1907. 4.	2008. 4.	2109. 4.	2210. 5.	2412. 6.	2615. 8.	2817. 10.	3017. 11.	3213. 12.	3399. 13.
300.	1716.5 3.9	1815. 4.	1915. 4.	2014. 5.	2114. 5.	2214. 5.	2414. 6.	2614. 8.	2815. 10.	3012. 11.	3207. 12.	3391. 13.
320.	1726.3 3.9	1824. 4.	1923. 4.	2022. 5.	2121. 5.	2220. 6.	2417. 7.	2616. 8.	2814. 10.	3010. 11.	3202. 12.	3386. 13.
340.	1736.5 3.9	1834. 4.	1931. 5.	2029. 5.	2128. 5.	2226. 6.	2422. 7.	2618. 9.	2814. 10.	3009. 11.	3200. 12.	3382. 13.

Table 2. The most probable specific enthalpies with their associated tolerances -continued

The specific enthalpies(upper figure) and their associated tolerances(lower figure) are given in kJ/kg

Pressure MPa	Temperature, K ( IPTS-68)											
	648.15	673.15	698.15	723.15	748.15	773.15	823.15	873.15	923.15	973.15	1023.15	1073.15
360.	1747.	1844.	1941.	2038.	2135.	2233.	2427.	2622.	2816.	3009.	3199.	3380.
	4.	4.	5.	5.	5.	6.	7.	9.	10.	11.	12.	17.
380.	1758.	1854.	1950.	2047.	2144.	2240.	2433.	2626.	2819.	3011.	3200.	3380.
	4.	4.	5.	5.	5.	6.	7.	9.	10.	11.	12.	20.
400.	1769.	1865.	1960.	2056.	2152.	2248.	2440.	2632.	2824.	3014.	3202.	3381.
	4.	4.	5.	5.	5.	6.	7.	9.	10.	11.	16.	20.
450.	1798.	1892.	1987.	2081.	2176.	2271.	2459.	2648.	2837.	3025.	3211.	3388.
	4.	4.	5.	5.	5.	6.	7.	9.	10.	12.	16.	23.
500.	1828.	1921.	2015.	2108.	2202.	2295.	2482.	2668.	2855.	3041.	3224.	3400.
	4.	4.	5.	5.	6.	6.	7.	9.	10.	15.	19.	23.
550.	1859.	1952.	2044.	2137.	2230.	2322.	2506.	2691.	2876.	3060.	3241.	3415.
	4.	4.	5.	5.	6.	6.	8.	9.	10.	15.	19.	24.
600.	1891.	1983.	2074.	2167.	2258.	2350.	2533.	2716.	2899.	3081.	3261.	3433.
	4.	4.	5.	5.	6.	7.	8.	9.	10.	15.	19.	24.
650.	1923.	2014.	2106.	2197.	2288.	2379.	2560.	2742.	2923.	3104.	3282.	3454.
	4.	4.	5.	6.	6.	7.	8.	9.	11.	15.	19.	27.
700.	1956.	2047.	2137.	2228.	2319.	2409.	2589.	2769.	2949.	3128.	3306.	3476.
	4.	5.	5.	6.	6.	7.	8.	11.	14.	21.	26.	34.
750.	1989.	2079.	2170.	2260.	2350.	2440.	2619.	2797.	2976.	3154.	3330.	3500.
	4.	5.	5.	6.	6.	7.	9.	11.	14.	25.	33.	40.
800.	2023.	2113.	2203.	2292.	2382.	2471.	2649.	2827.	3004.	3181.	3360.	3520.
	4.	5.	5.	6.	6.	7.	9.	14.	18.	31.	40.	50.
850.	2057.	2146.	2236.	2325.	2414.	2503.	2680.	2857.	3033.	3208.	3380.	3550.
	4.	5.	5.	6.	7.	7.	10.	17.	24.	38.	50.	60.
900.	2091.	2180.	2269.	2358.	2447.	2536.	2711.	2887.	3062.	3240.	3410.	3570.
	4.	5.	6.	6.	9.	10.	13.	20.	30.	50.	50.	60.
950.	2125.	2214.	2303.	2392.	2480.	2568.	2743.	2918.	3090.	3260.	3430.	3600.
	4.	5.	7.	7.	12.	12.	16.	23.	40.	50.	60.	70.
1000.	2159.	2248.	2337.	2425.	2514.	2601.	2776.	2949.	3120.	3290.	3460.	3620.
	5.	5.	8.	9.	13.	15.	22.	29.	50.	60.	70.	80.

\*\*

Except for this entry, the sign ( ± ) of the tolerance is omitted.

Part II: Skeleton Tables 1985 of Thermodynamic Properties along the Saturation Curve of Ordinary Water Substance

Table 3. The most probable thermodynamic property values with their associated tolerances

Temperature K (IPTS-68)	Pressure		Specific volume				Specific enthalpy			
	MPa		Saturated water dm <sup>3</sup> /kg		Saturated steam dm <sup>3</sup> /kg		Saturated water kJ/kg		Saturated steam kJ/kg	
273.16	0.000611659±0.000000010**		1.000210±0.000010		206031. ± 150.		0.000611787±0.000000010		2500.3 ± 1.6	
278.15	0.00087246	0.00000005	1.000085	0.000010	147064.	100.	21.017	0.010	2509.8	1.6
283.15	0.00122792	0.00000009	1.000347	0.000010	106353.	80.	42.013	0.021	2519.2	1.6
288.15	0.00170528	0.00000017	1.000947	0.000010	77917.	60.	62.968	0.029	2528.4	1.6
293.15	0.00233849	0.00000029	1.001844	0.000010	57791.	40.	83.895	0.036	2537.6	1.6
298.15	0.0031687	0.0000005	1.003008	0.000015	43364.	30.	104.81	0.04	2546.7	1.6
303.15	0.0042451	0.0000006	1.004415	0.000015	32900.	25.	125.71	0.05	2555.7	1.6
308.15	0.0056263	0.0000008	1.006046	0.000015	25223.	20.	146.60	0.06	2564.7	1.6
313.15	0.0073811	0.0000010	1.007887	0.000015	19530.	15.	167.50	0.06	2573.7	1.6
318.15	0.0095897	0.0000012	1.009925	0.000015	15264.	10.	188.39	0.07	2582.6	1.6
323.15	0.0123446	0.0000015	1.012149	0.000015	12037.	8.	209.29	0.07	2591.4	1.6
328.15	0.0157521	0.0000017	1.014551	0.000015	9573.	7.	230.20	0.08	2600.2	1.6
333.15	0.0199331	0.0000021	1.017126	0.000015	7674.	6.	251.12	0.09	2609.0	1.6
338.15	0.0250239	0.0000024	1.019866	0.000015	6200.	5.	272.05	0.10	2617.7	1.6
343.15	0.0311777	0.0000028	1.022768	0.000015	5045.	4.	293.00	0.10	2626.3	1.6
348.15	0.0385653	0.0000033	1.025829	0.000020	4133.3	3.0	313.96	0.11	2634.8	1.6
353.15	0.0473759	0.0000038	1.029045	0.000020	3408.9	2.5	334.93	0.11	2643.2	1.6
358.15	0.057818	0.000004	1.032416	0.000020	2829.0	2.0	355.93	0.12	2651.6	1.6
363.15	0.070121	0.000005	1.035939	0.000020	2361.8	1.7	376.95	0.13	2659.8	1.6
368.15	0.084533	0.000005	1.039615	0.000020	1982.9	1.4	397.99	0.14	2667.9	1.6
373.15	0.101325		1.043442	0.000020	1673.7	1.2	419.07	0.14	2675.8	1.6
383.15	0.14324	0.00004	1.051558	0.000020	1210.7	0.9	461.30	0.18	2691.3	1.6
393.15	0.19848	0.00005	1.060296	0.000025	892.3	0.7	503.69	0.22	2706.2	1.6
398.15	0.23201	0.00006	1.064904	0.000025	770.9	0.6	524.94	0.24	2713.3	1.6
403.15	0.27002	0.00007	1.069674	0.000025	668.8	0.5	546.25	0.26	2720.3	1.6
413.15	0.36119	0.00009	1.079718	0.000025	509.0	0.4	589.01	0.30	2733.6	1.6
423.15	0.47571	0.00012	1.090460	0.000030	392.85	0.28	632.01	0.35	2746.0	1.6
433.15	0.61766	0.00015	1.10194	0.00005	307.08	0.22	675.3	0.4	2757.5	1.7
443.15	0.79147	0.00020	1.11422	0.00007	242.81	0.19	718.9	0.4	2767.9	1.8
448.15	0.89180	0.00022	1.12067	0.00008	216.77	0.17	740.8	0.4	2772.7	1.8
453.15	1.00193	0.00025	1.12734	0.00009	194.01	0.16	762.8	0.5	2777.2	1.9
463.15	1.25417	0.00030	1.14139	0.00010	156.49	0.14	807.2	0.5	2785.2	1.9
473.15	1.5537	0.0004	1.15645	0.00015	127.31	0.12	852.0	0.5	2791.9	2.0

THERMODYNAMIC PROPERTIES OF WATER

Table 3. The most probable thermodynamic property values with their associated tolerances -continued

Temperature K (IPTS-68)	Pressure		Specific volume				Specific enthalpy			
	MPa		Saturated water dm <sup>3</sup> /kg		Saturated steam dm <sup>3</sup> /kg		Saturated water kJ/kg		Saturated steam kJ/kg	
483.15	1.9062	0.0005	1.17262	0.00015	104.37	0.10	897.4	0.6	2797.2	2.1
493.15	2.3178	0.0006	1.19004	0.00020	86.15	0.09	943.3	0.6	2800.9	2.2
503.15	2.7950	0.0007	1.20886	0.00020	71.55	0.08	989.9	0.7	2802.8	2.4
513.15	3.3446	0.0008	1.22927	0.00025	59.75	0.07	1037.2	0.7	2802.9	2.5
523.15	3.9735	0.0010	1.25149	0.00030	50.12	0.06	1085.4	0.7	2800.9	2.6
533.15	4.6892	0.0012	1.27583	0.00035	42.20	0.06	1134.6	0.8	2796.5	2.8
543.15	5.4996	0.0014	1.3027	0.0004	35.64	0.05	1184.9	0.8	2789.6	3.0
553.15	6.4127	0.0016	1.3324	0.0005	30.17	0.04	1236.5	0.9	2779.7	3.1
563.15	7.4375	0.0018	1.3658	0.0005	25.57	0.04	1289.6	0.9	2766.5	3.2
573.15	8.5831	0.0022	1.4037	0.0006	21.671	0.033	1344.6	1.0	2749.4	3.4
583.15	9.8597	0.0025	1.4473	0.0007	18.344	0.033	1401.7	1.0	2727.7	3.6
593.15	11.2784	0.0028	1.4984	0.0007	15.479	0.033	1461.7	1.1	2700.3	3.8
603.15	12.8515	0.0032	1.5601	0.0008	12.987	0.032	1525.4	1.1	2666.	4.
613.15	14.593	0.004	1.6374	0.0009	10.790	0.029	1594.1	1.2	2622.	4.
623.15	16.521	0.004	1.7403	0.0010	8.812	0.026	1670.6	1.2	2564.	5.
633.15	18.657	0.005	1.894	0.008	6.957	0.035	1760.9	1.9	2482.	6.
643.15	21.033	0.005	2.215	0.020	4.96	0.04	1890.0	3.5	2334.	7.
644.15	21.286	0.005	2.280	0.020	4.71	0.04	1909.8	3.5	2309.	7.
645.15	21.542	0.005	2.365	0.020	4.43	0.04	1933.8	3.5	2277.	7.
646.15	21.802	0.005	2.496	0.025	4.07	0.04	1966.	4.	2233.	10.
647.14*	22.064	0.005	3.106	0.030	3.106	0.030	2086.	15.	2086.	15.

At the triple point(273.16 K), the values of the specific internal energy and the specific entropy of saturated water have been made exactly zero as adopted at the fifth International Conference on the Properties of Steam in London, England, 1956.

The saturation pressure is exactly 0.101325 MPa at the normal boiling point(373.15 K) which is defined as the fixed point of the International Practical Temperature Scale of 1968(IPTS-68).

\*

At the critical point, the values of the temperature, pressure, and density of ordinary water substance are ( 647.14 +  $\delta_1$  ) K, where  $\delta_1 = 0.00 \pm 0.10$ , ( 22.064 + 0.27 $\delta_1 \pm 0.005$  ) MPa, and ( 322  $\pm$  3 ) kg/m<sup>3</sup>, respectively. (Ref. IAPS Statement, 1983, of the Values of the Temperature, Pressure, and Density of Pure Ordinary and Heavy Water Substances at Their Respective Critical Points.)

\*\*

Except for the entries in the first line, the sign (  $\pm$  ) of the tolerance is omitted.

Appendix II

Comparison of the available specific-volume values of water with the present skeleton table values along the isotherms between 273.15 and 1073.15 K in the pressure range up to 1 GPa. Percent deviations of the specific-volume values from the IAPS Formulation 1984(IAPS-84) are plotted in the figures.

Table A.II.1. The lines and marks in Figs. A.II.1a-24b

————	The IFC Formulation for Industrial Use (IFC-67)	
-----	Equation developed by Pollak, R., 1974	
-----	Equation developed by Sato, H., Uematsu M., and Watanabe, K., 1981(SUWH)	
-----	Equation developed by Sato, H., Uematsu M., and Watanabe, K., 1985(SUWL)	
◇	Alexandrov, et al.	(1976) <sup>73</sup>
⊗	Borzunov, et al.	(1970) <sup>66</sup>
×	Burnham, et al.	(1977) <sup>77</sup>
⊕	Chen, et al.	(1977) <sup>85</sup>
⊗	Garnjost	(1974) <sup>68</sup>
⊗	Grigoryev, et al.	(1974) <sup>69</sup>
⊕	I series	
⊗	II series	
△	Grindley and Lind	(1971) <sup>67</sup>
⊗	Hanafusa, et al.	(1984) <sup>104</sup>
⊗	Hilbert, et al.	(1974) <sup>78</sup>
⊗	Kell, et al.	(1974) <sup>70</sup>
⊗	Kell, et al.	(1975) <sup>71</sup>
⊗	Kell, et al.	(1978) <sup>72</sup>
☆	Keyes, et al.	(1935) <sup>44</sup>
⊕	Köster and Franck	(1969) <sup>64</sup>
⊕	Maier and Franck	(1966) <sup>63</sup>
⊕	Rivkin, et al.	(1962) <sup>54</sup>
⊕	Rivkin, et al.	(1963) <sup>55</sup>
⊕	Rivkin, et al.	(1964) <sup>56</sup>
⊗	Smith and Keyes	(1934) <sup>43</sup>
⊗	Tanishita, et al.	(1976) <sup>61</sup>
⊗	Vedam and Holton	(1968) <sup>65</sup>
⊗	Vukalovich, et al.	(1961) <sup>51</sup>
⊗	Vukalovich, et al.	(1962) <sup>52</sup>
▽	Zubarev, et al.	(1977) <sup>75</sup>
⊕	IST-63 value and the associated tolerance	
⊕		
)	IST-85 value and the associated tolerance	
⊕		

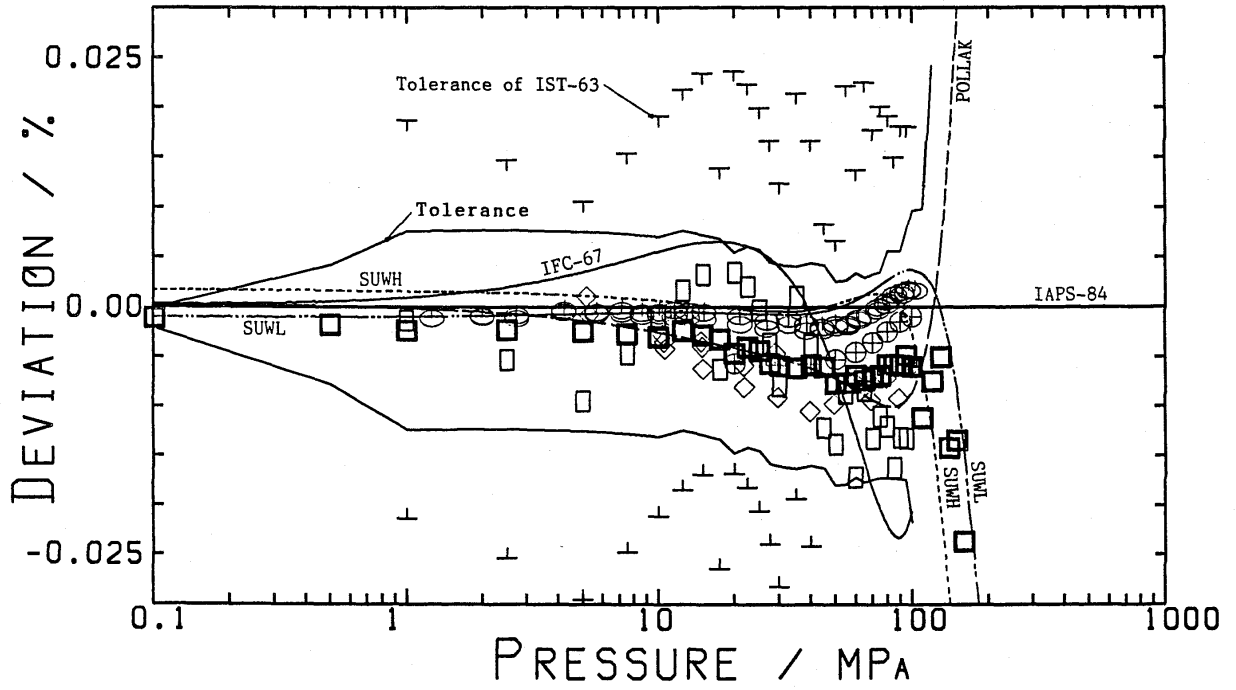


FIG. A.II.1a. Specific volume deviation from IAPS-84 at 273.15 K against logarithmic pressure scale.

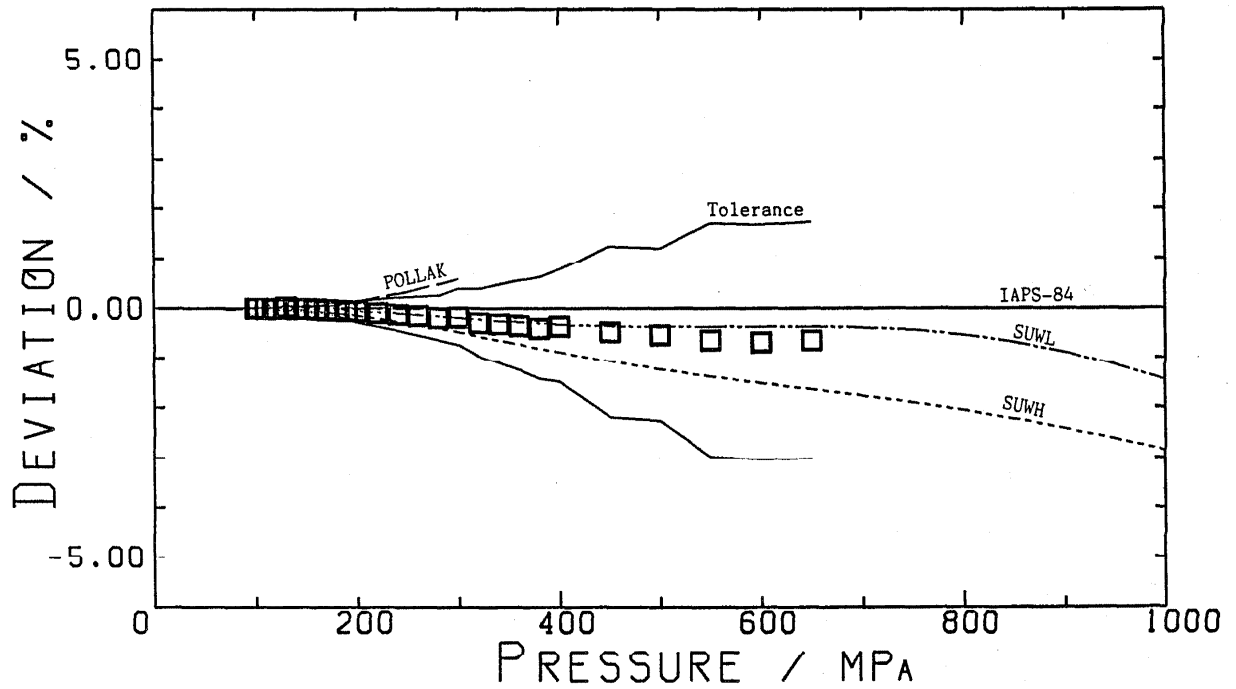


FIG. A.II.1b. Specific volume deviation from IAPS-84 at 273.15 K against pressure.

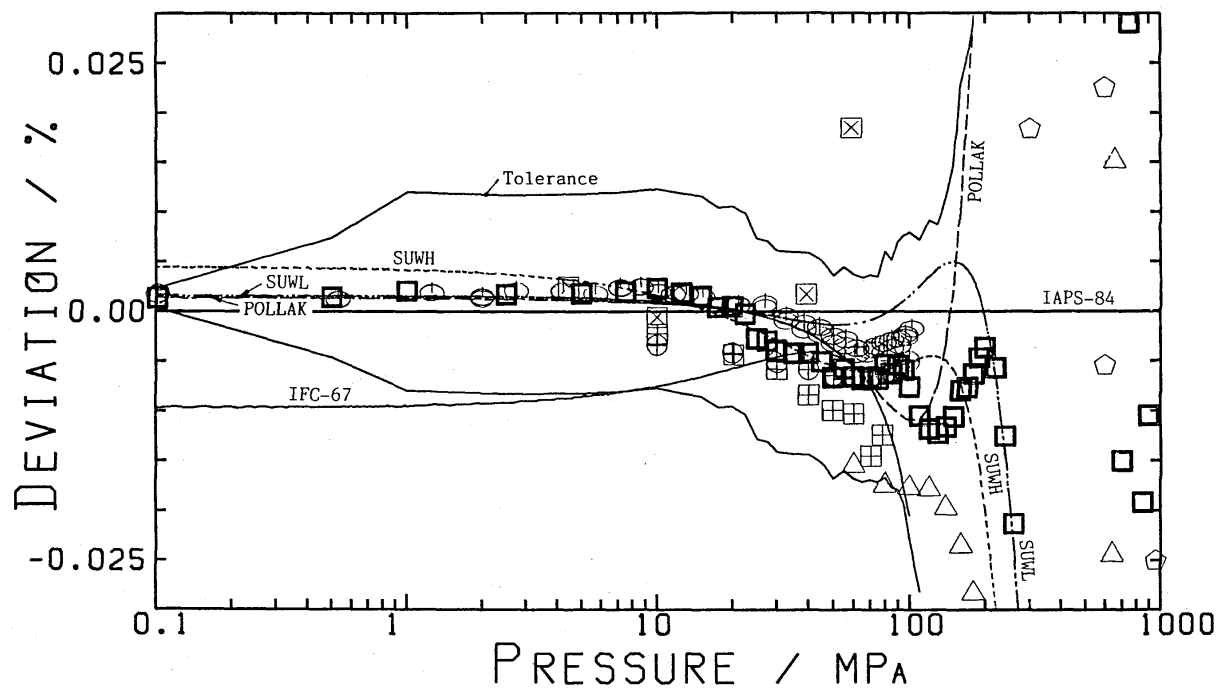


FIG. A.II.2a. Specific volume deviation from IAPS-84 at 298.15 K against logarithmic pressure scale.

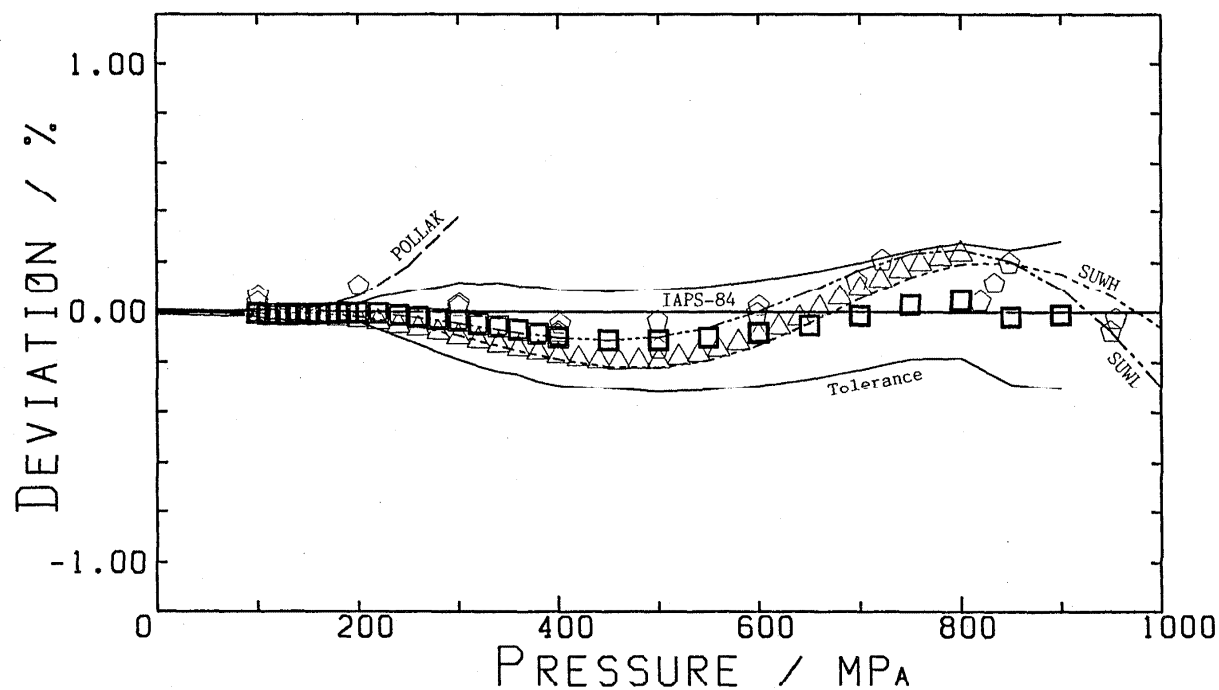


FIG. A.II.2b. Specific volume deviation from IAPS-84 at 298.15 K against pressure.



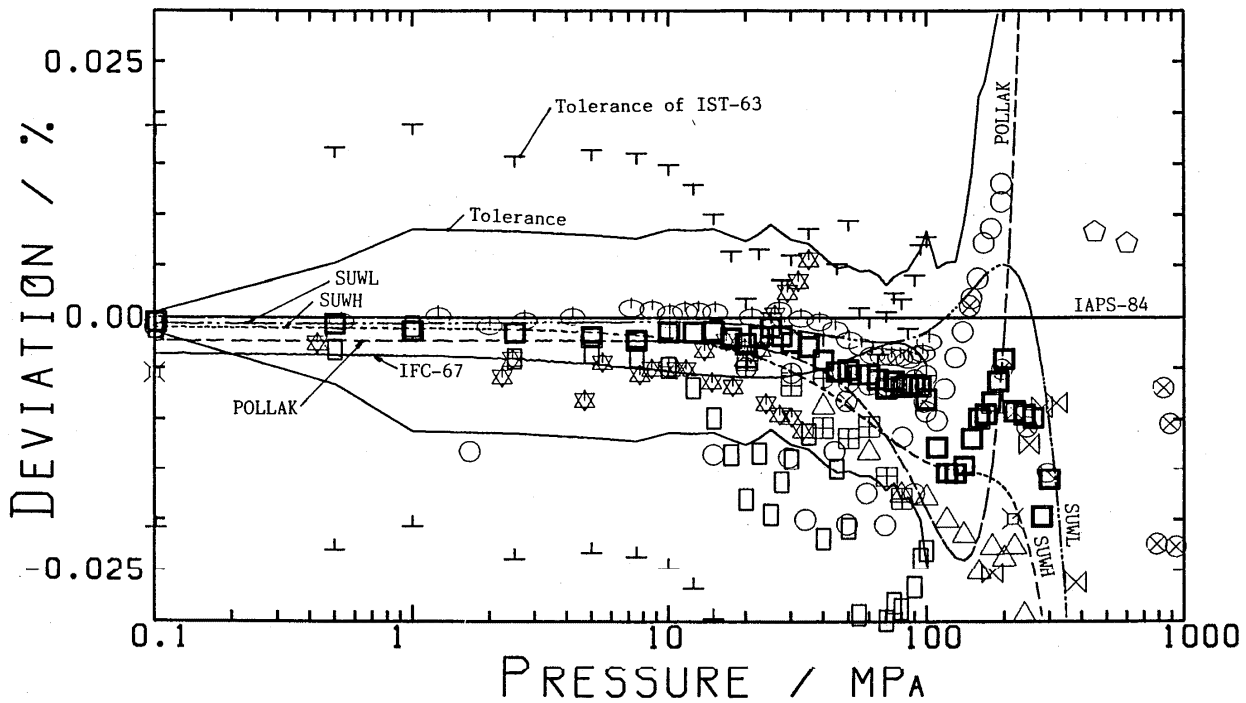


FIG. A.II.3a. Specific volume deviation from IAPS-84 at 323.15 K against logarithmic pressure scale.

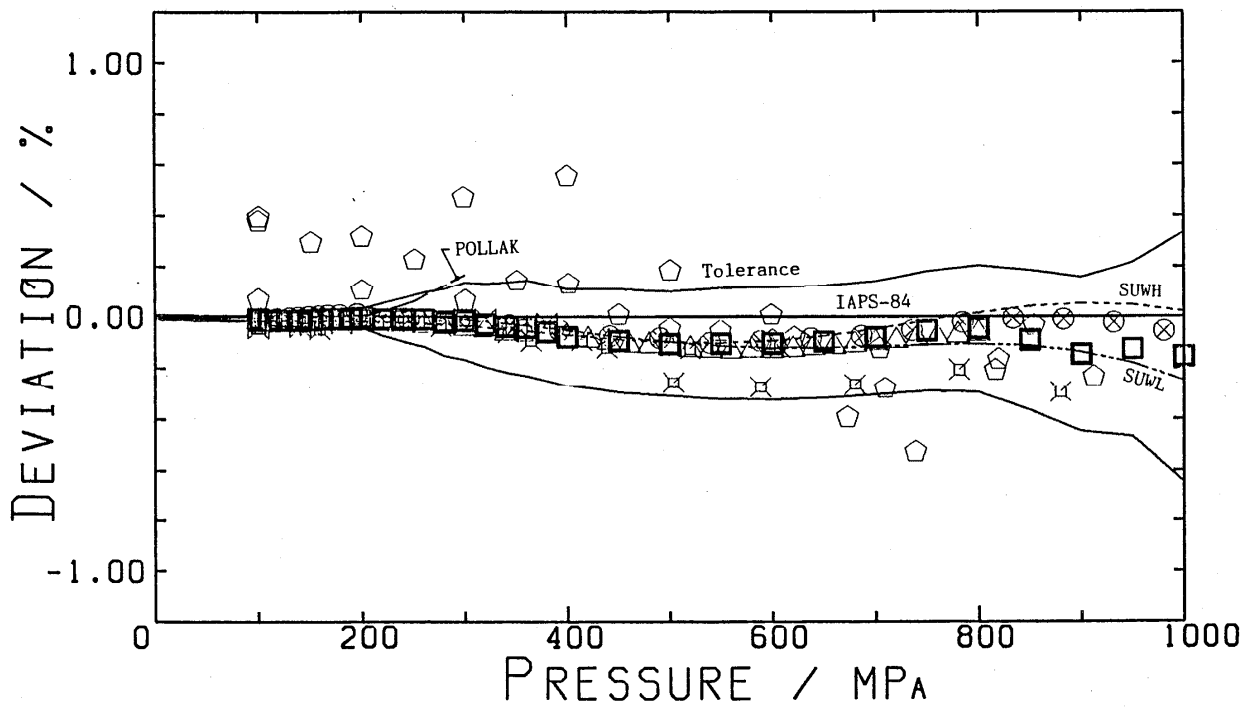


FIG. A.II.3b. Specific volume deviation from IAPS-84 at 323.15 K against pressure.

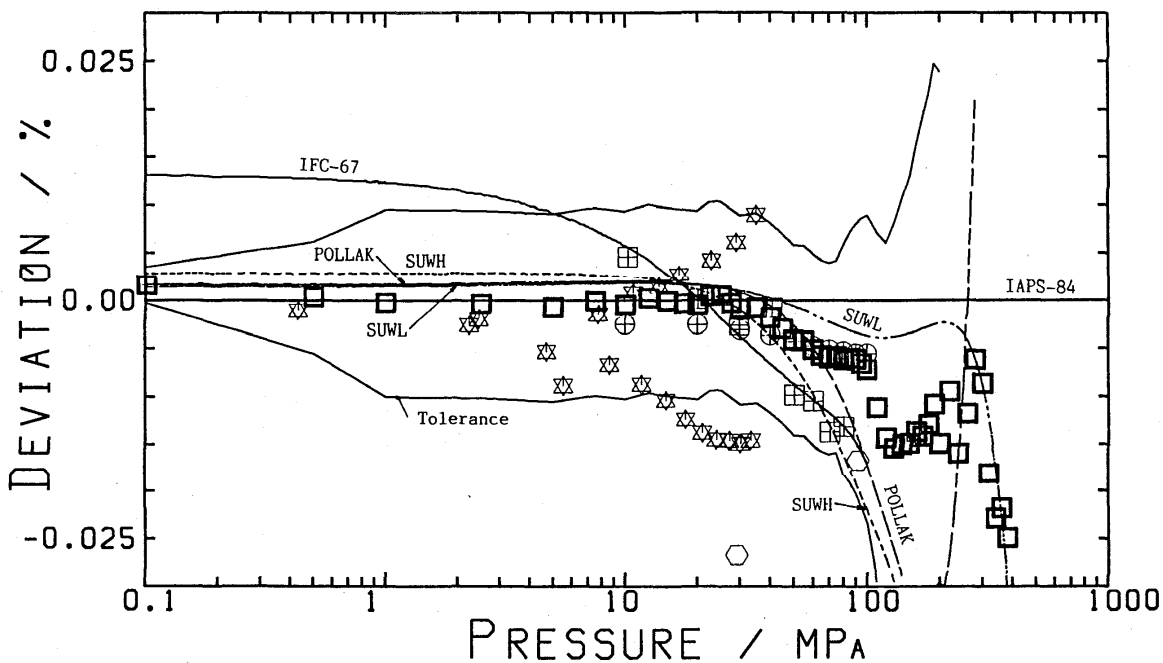


FIG. A.II.4a. Specific volume deviation from IAPS-84 at 348.15 K against logarithmic pressure scale.

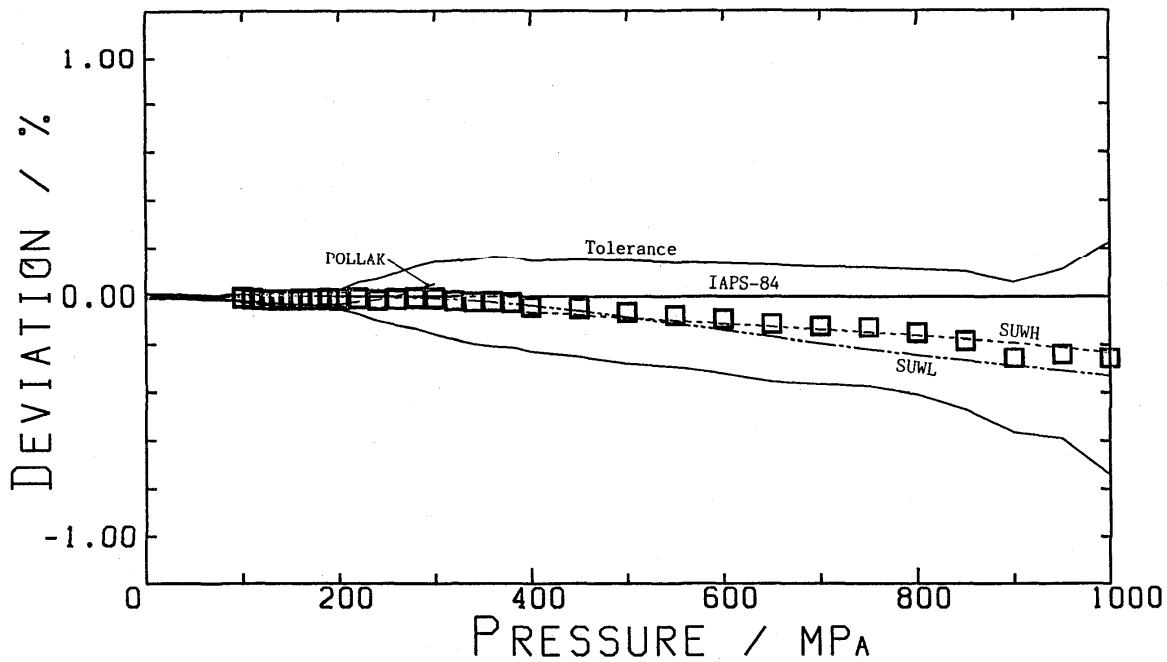


FIG. A.II.4b. Specific volume deviation from IAPS-84 at 348.15 K against pressure.

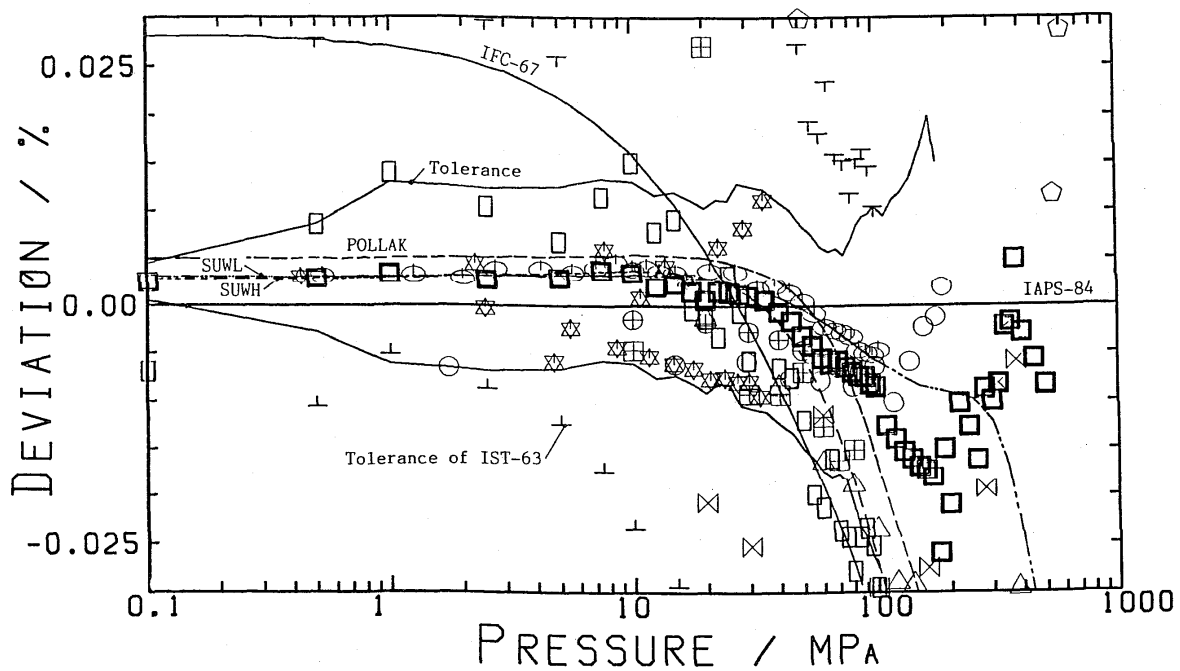


FIG. A.II.5a. Specific volume deviation from IAPS-84 at 373.15 K against logarithmic pressure scale.

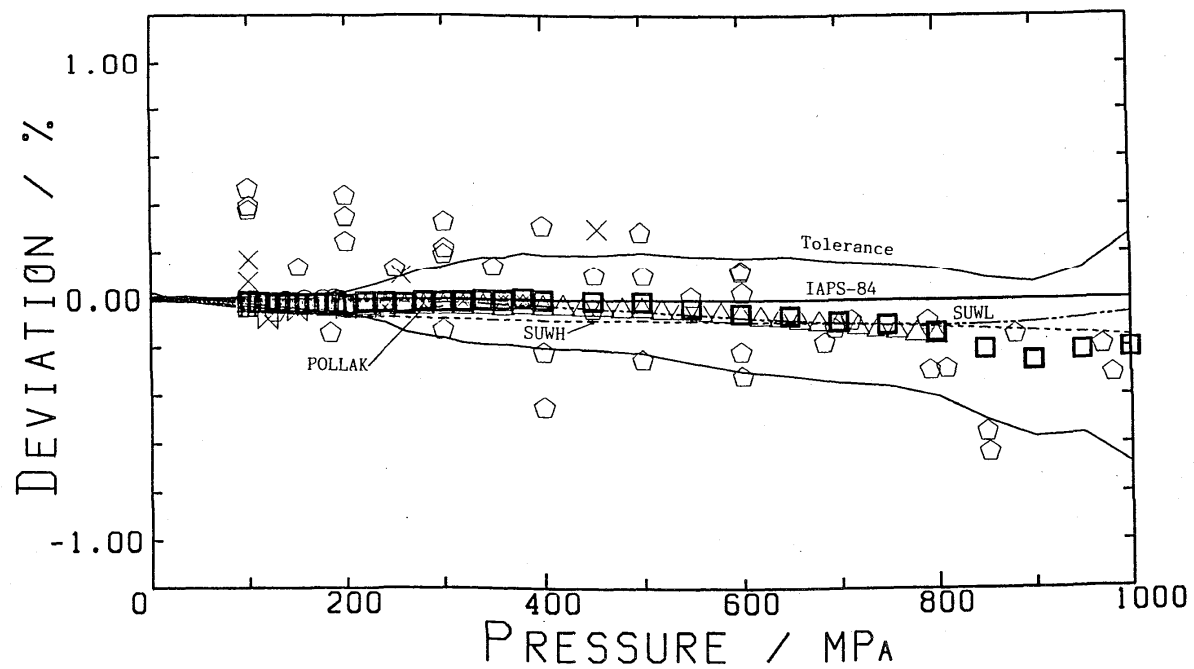


FIG. A.II.5b. Specific volume deviation from IAPS-84 at 373.15 K against pressure.

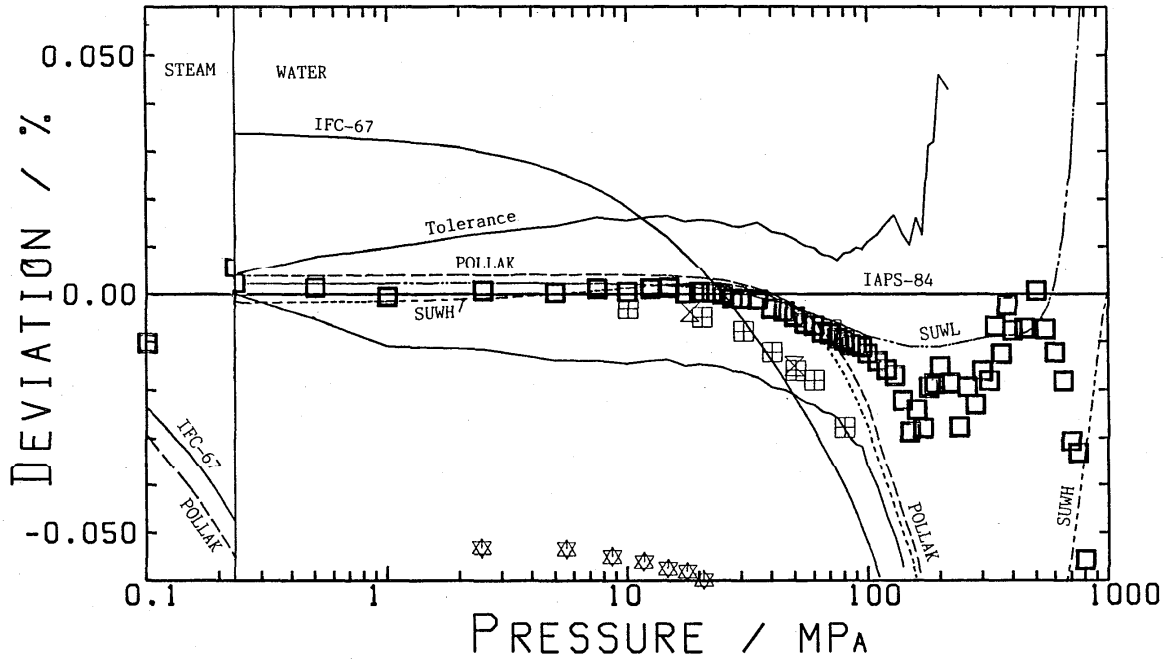


FIG. A.II.6a. Specific volume deviation from IAPS-84 at 398.15 K against logarithmic pressure scale.

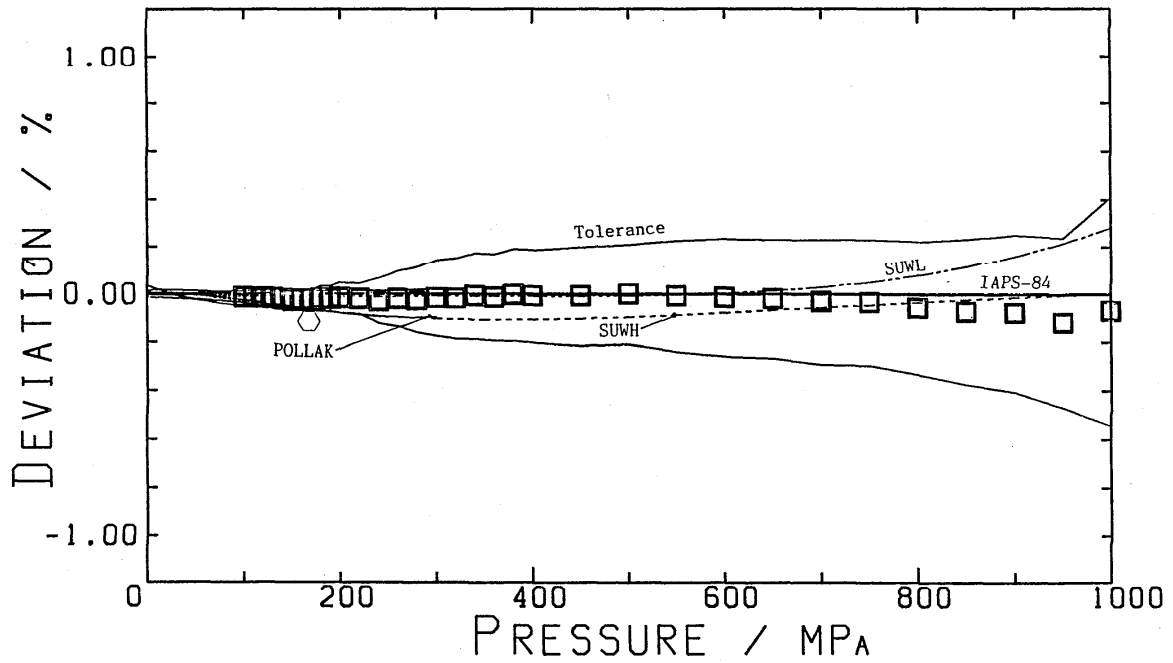


FIG. A.II.6b. Specific volume deviation from IAPS-84 at 398.15 K against pressure.

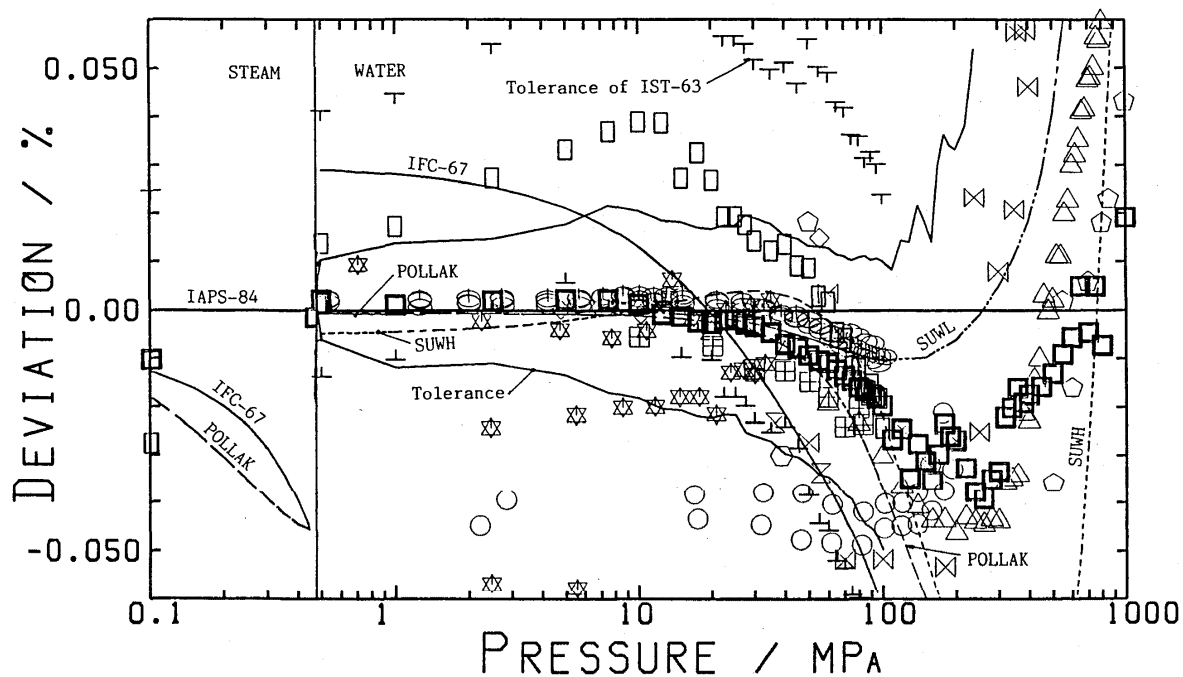


FIG. A.II.7a. Specific volume deviation from IAPS-84 at 423.15 K against logarithmic pressure scale.

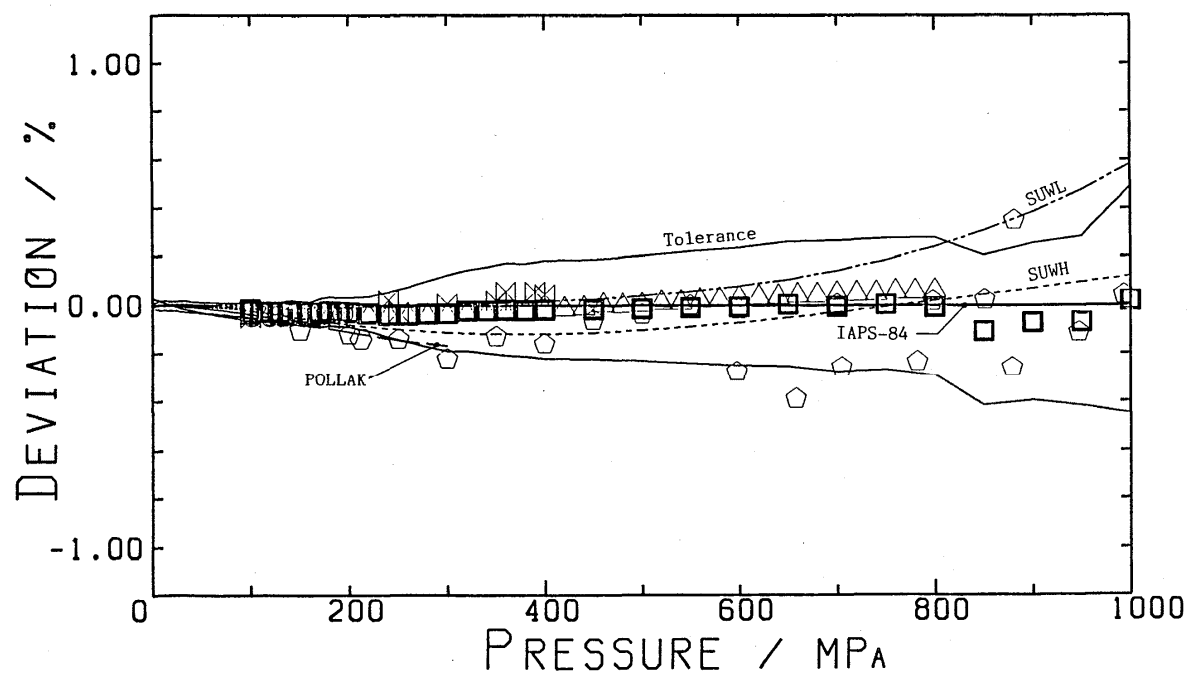


FIG. A.II.7b. Specific volume deviation from IAPS-84 at 423.15 K against pressure.

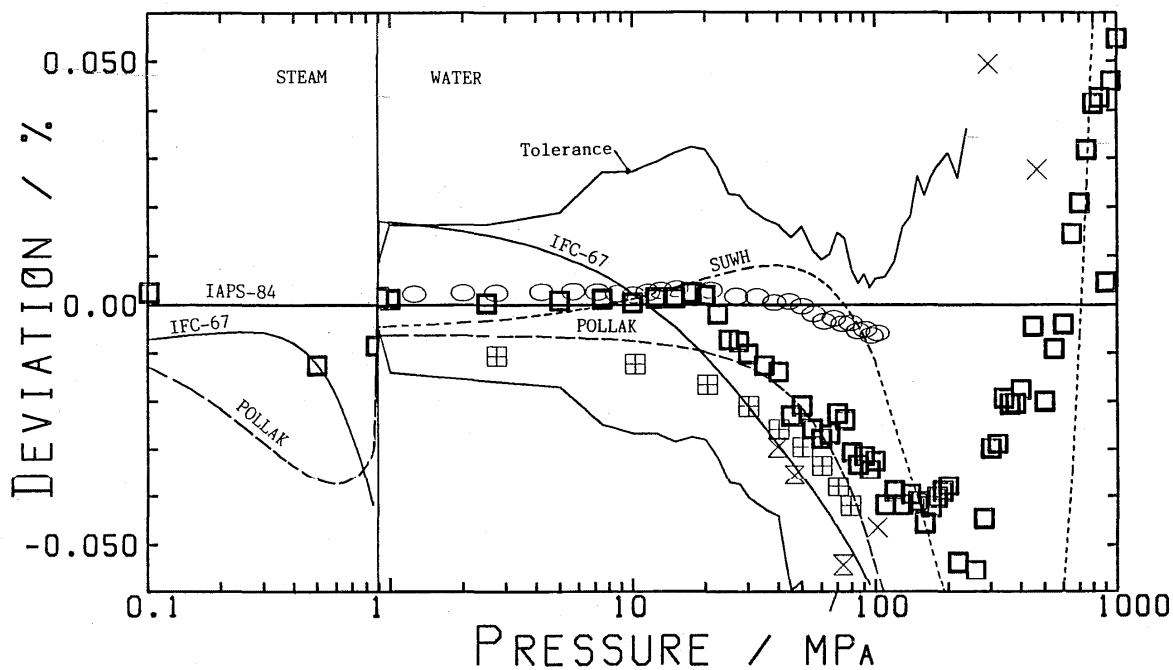


FIG. A.II.8a. Specific volume deviation from IAPS-84 at 448.15 K against logarithmic pressure scale.

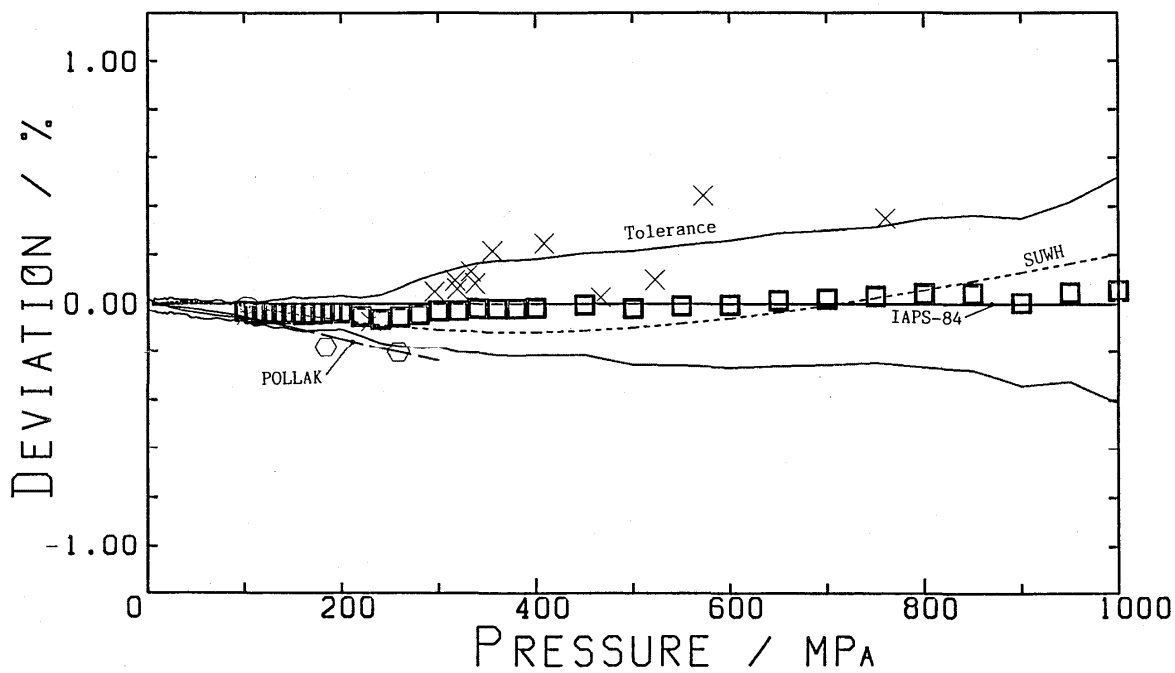


FIG. A.II.8b. Specific volume deviation from IAPS-84 at 448.15 K against pressure.

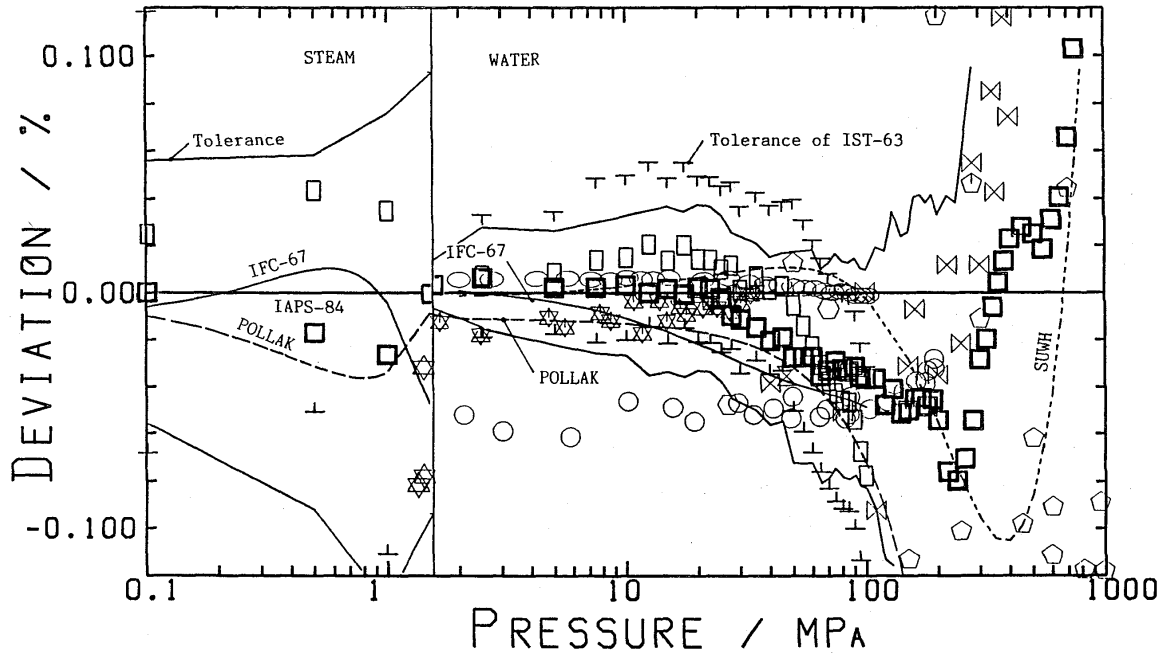


FIG. A.II.9a. Specific volume deviation from IAPS-84 at 473.15 K against logarithmic pressure scale.

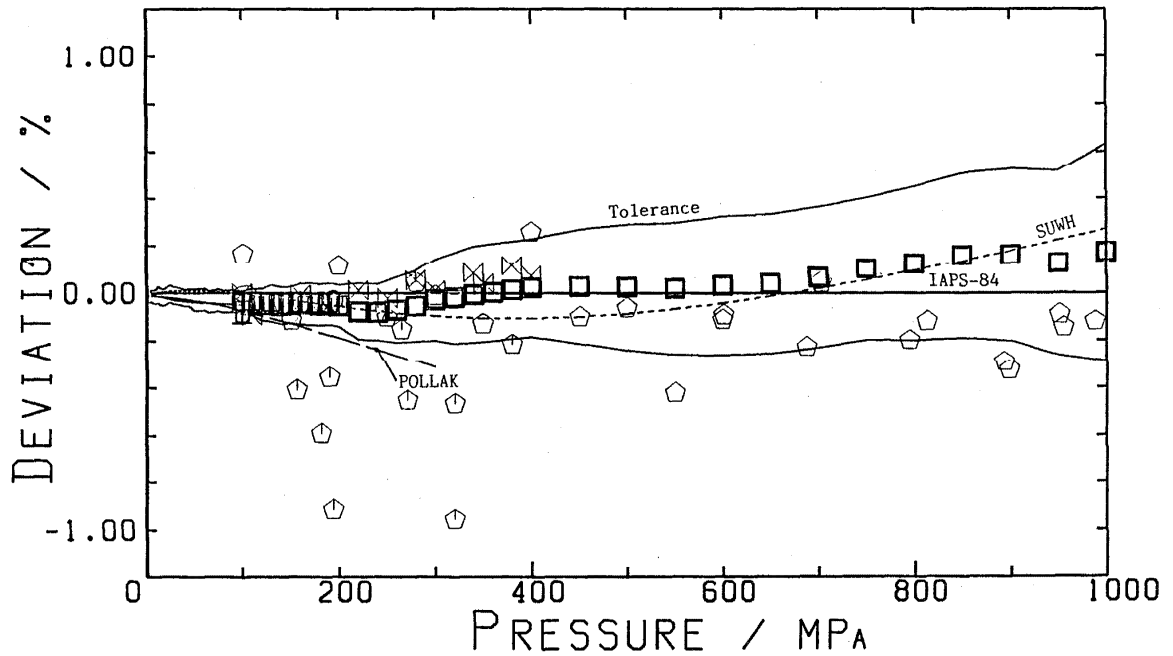


FIG. A.II.9b. Specific volume deviation from IAPS-84 at 473.15 K against pressure.

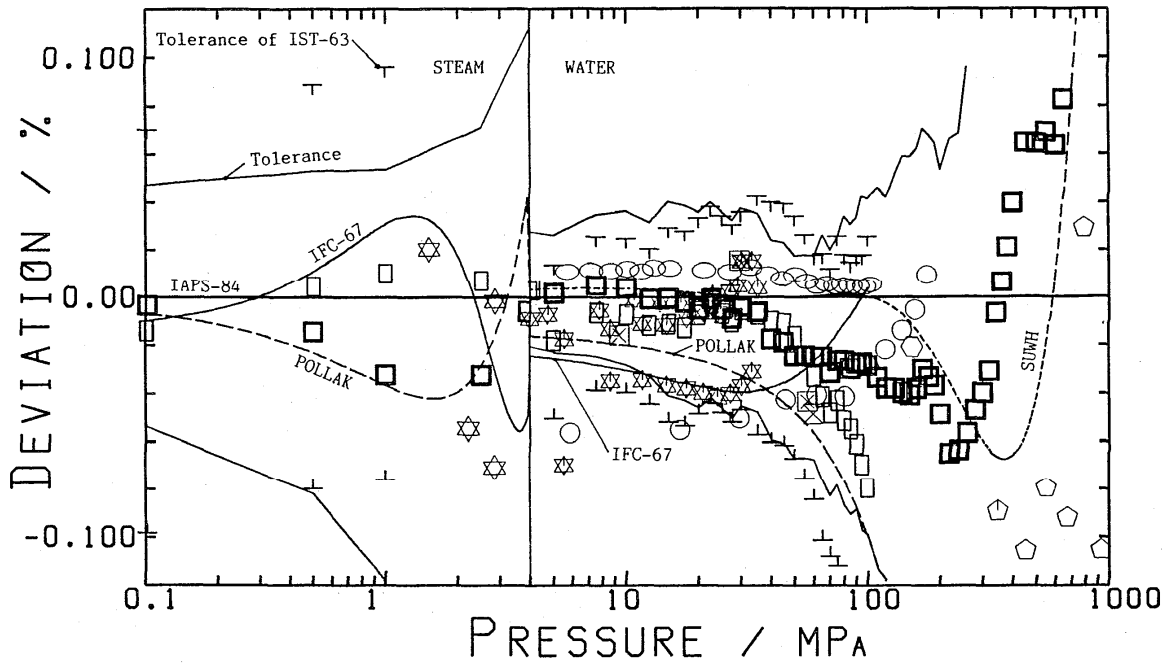


FIG. A.II.10a. Specific volume deviation from IAPS-84 at 523.15 K against logarithmic pressure scale.

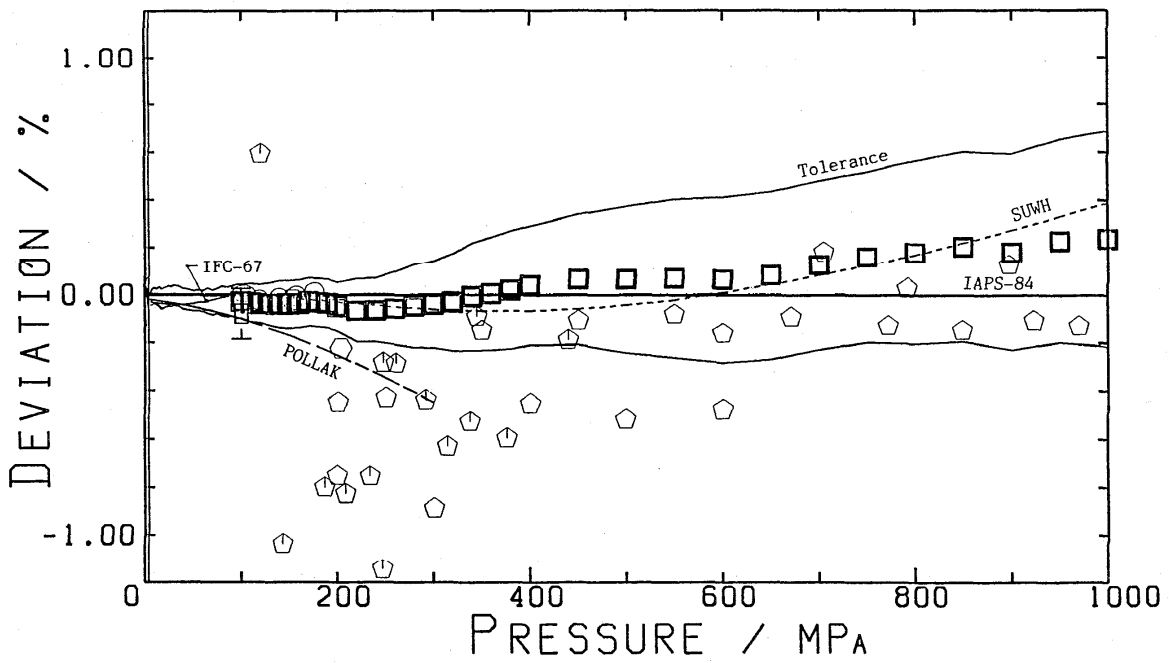


FIG. A.II.10b. Specific volume deviation from IAPS-84 at 523.15 K against pressure.



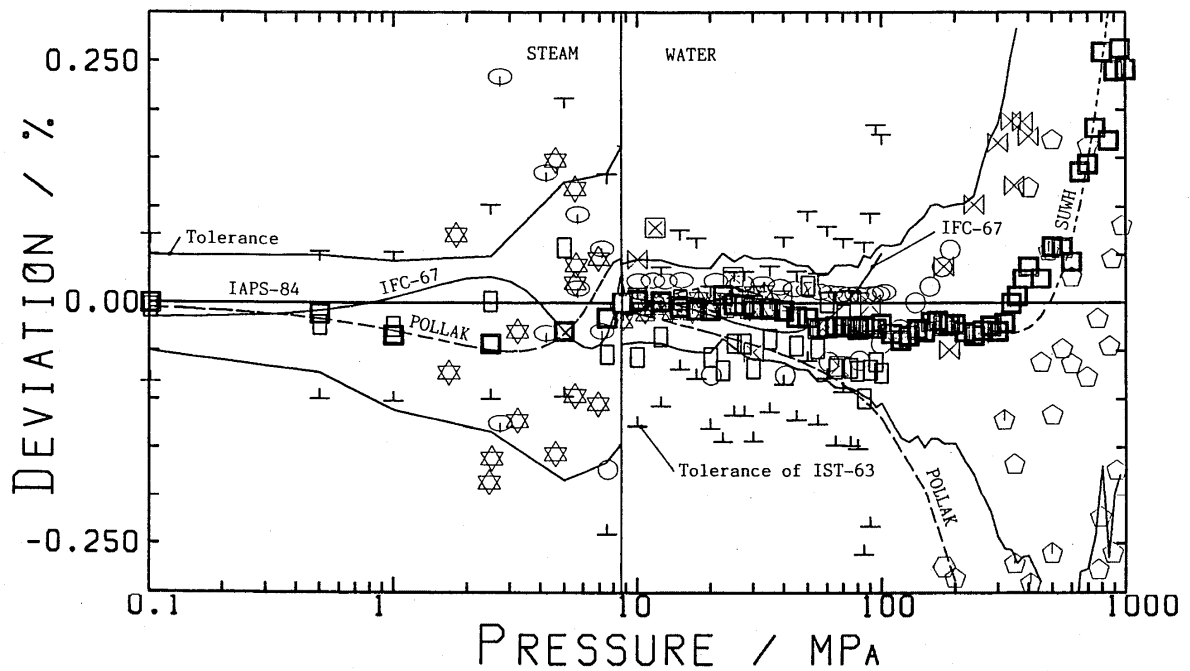


FIG. A.II.11a. Specific volume deviation from IAPS-84 at 573.15 K against logarithmic pressure scale.

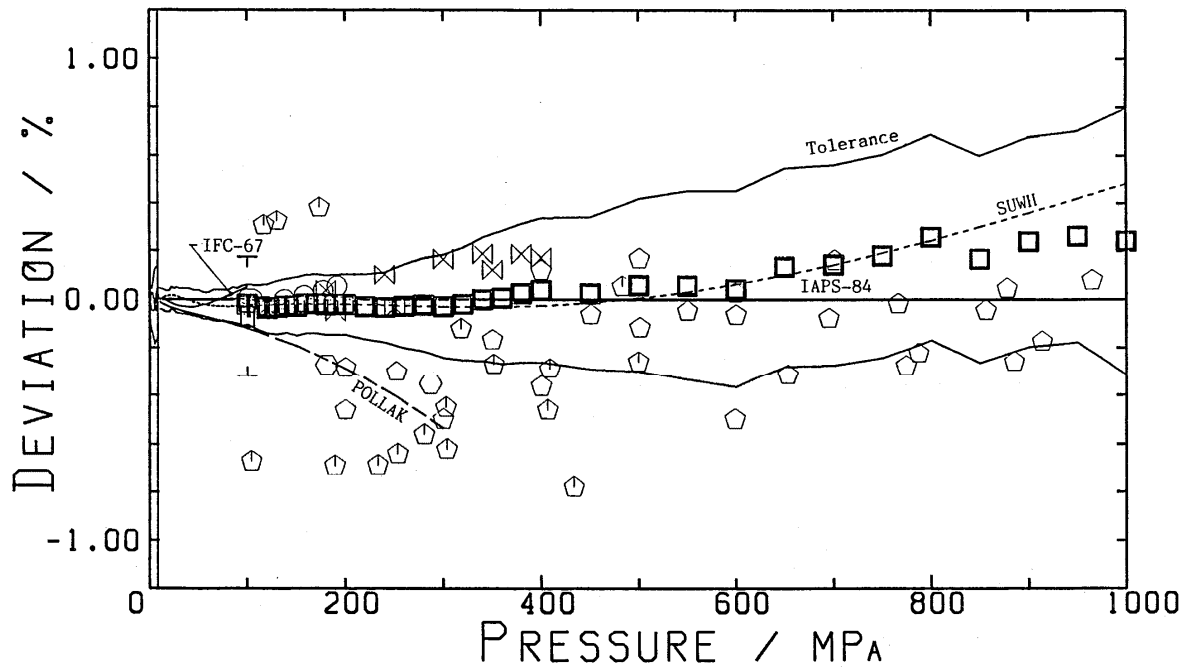


FIG. A.II.11b. Specific volume deviation from IAPS-84 at 573.15 K against pressure.

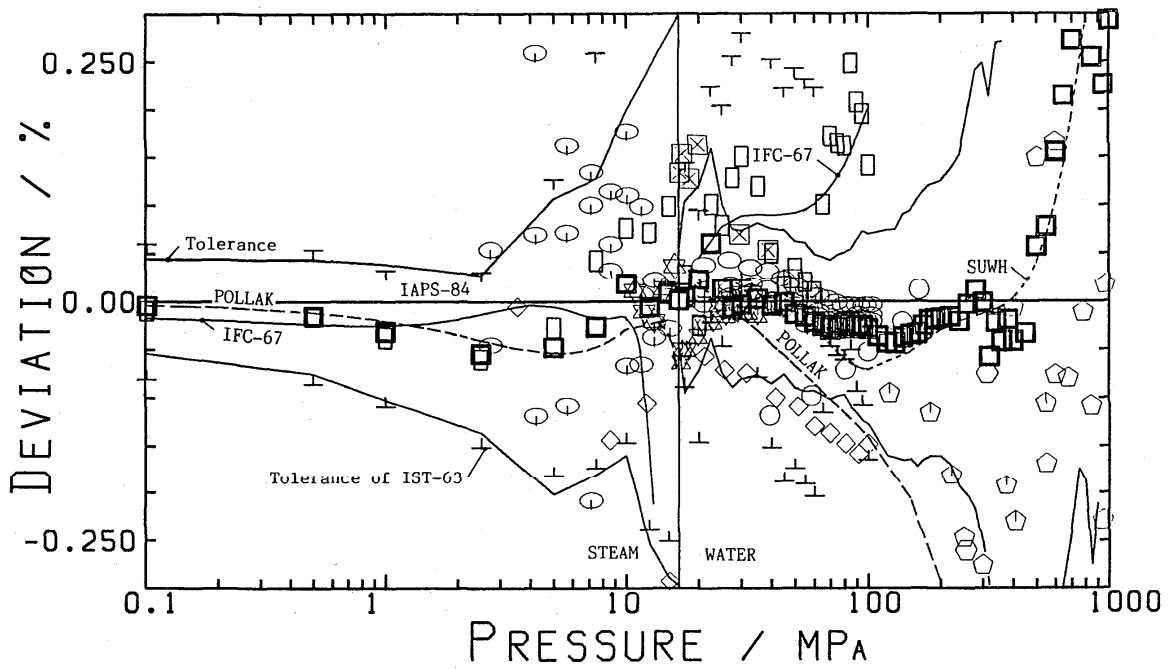


FIG. A.II.12a. Specific volume deviation from IAPS-84 at 623.15 K against logarithmic pressure scale.

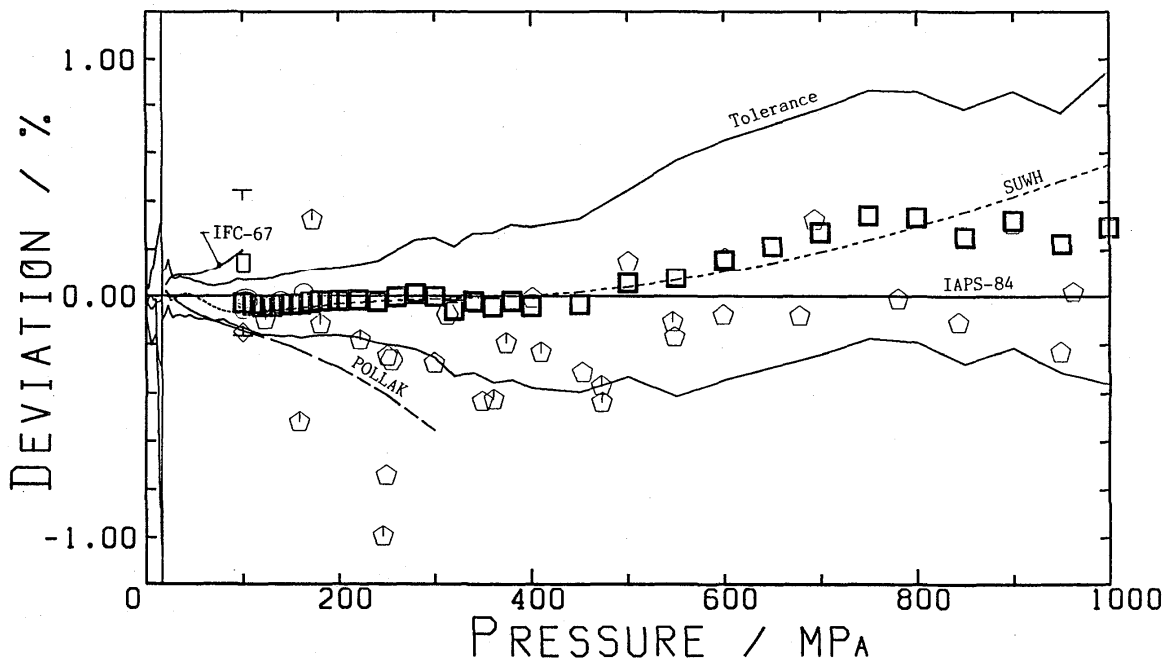


FIG. A.II.12b. Specific volume deviation from IAPS-84 at 623.15 K against pressure.

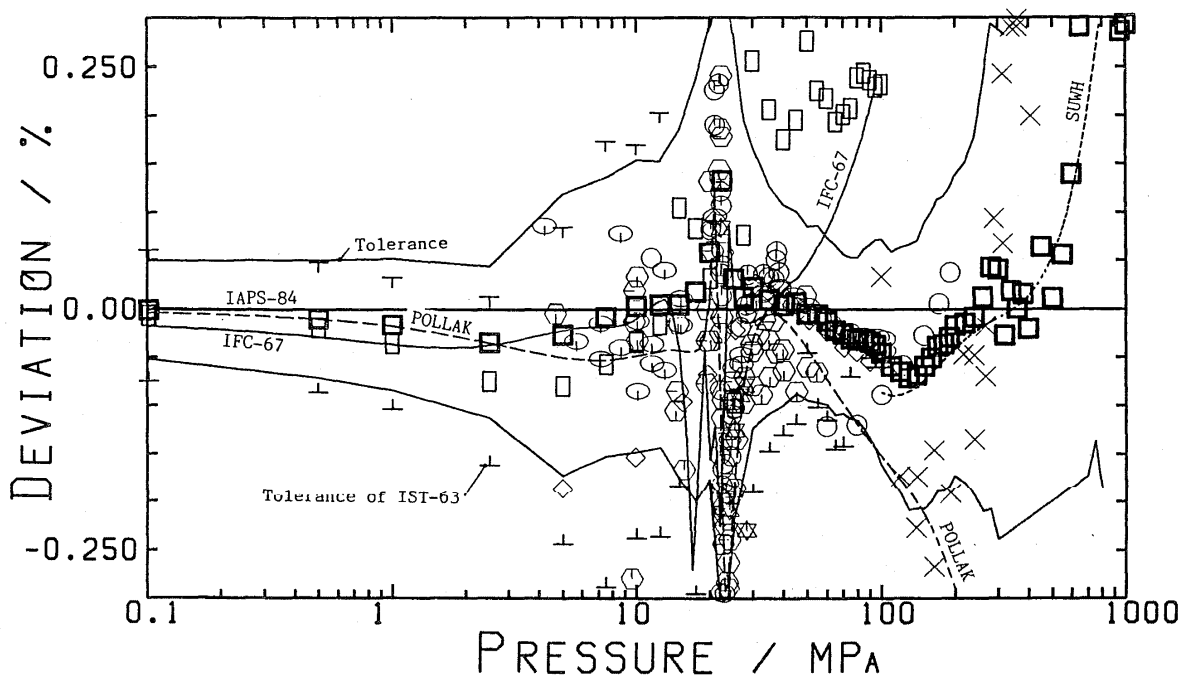


FIG. A.II.13a. Specific volume deviation from IAPS-84 at 648.15 K against logarithmic pressure scale.

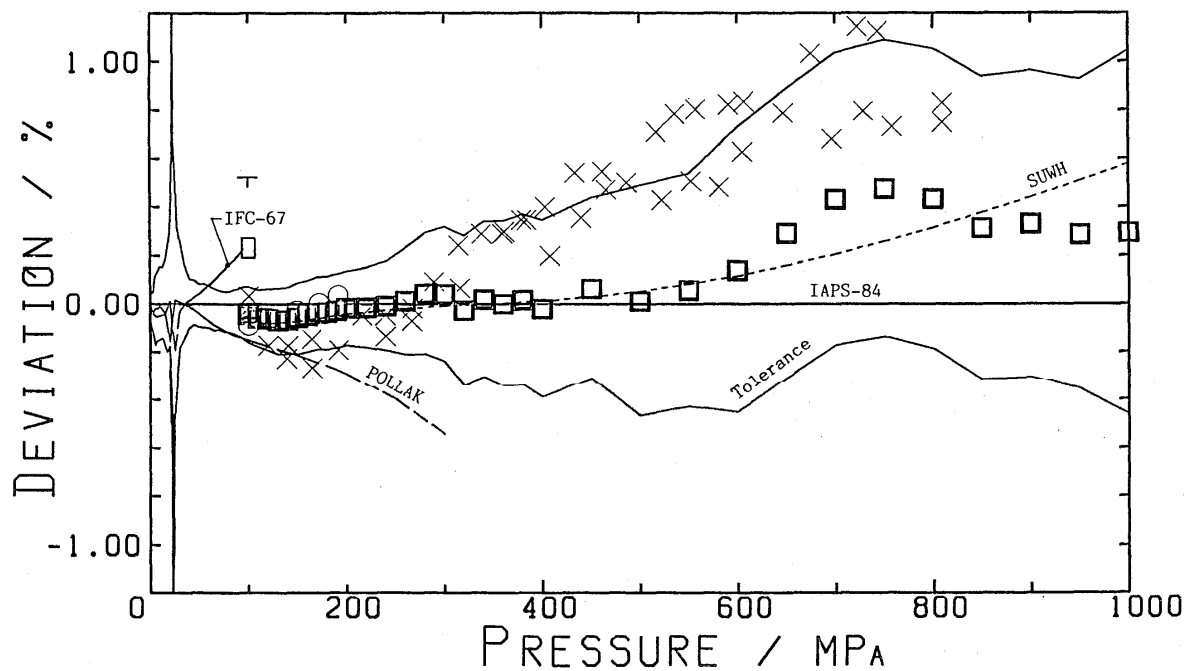


FIG. A.II.13b. Specific volume deviation from IAPS-84 at 648.15 K against pressure.

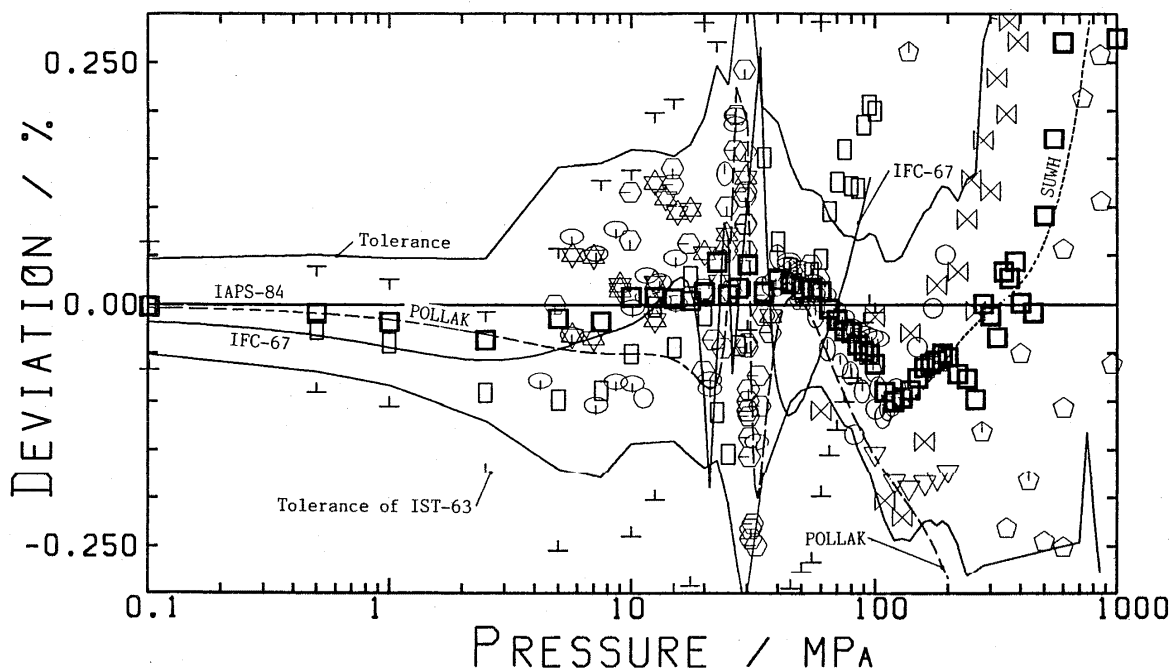


FIG. A.II.14a. Specific volume deviation from IAPS-84 at 673.15 K against logarithmic pressure scale.

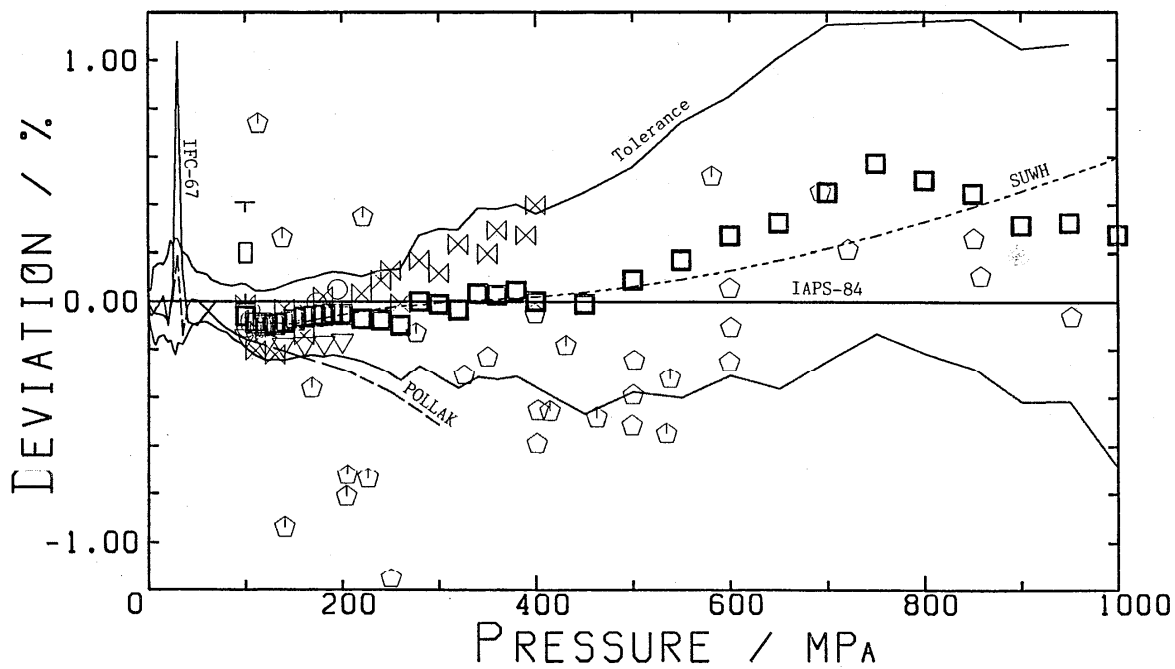


FIG. A.II.14b. Specific volume deviation from IAPS-84 at 673.15 K against pressure.

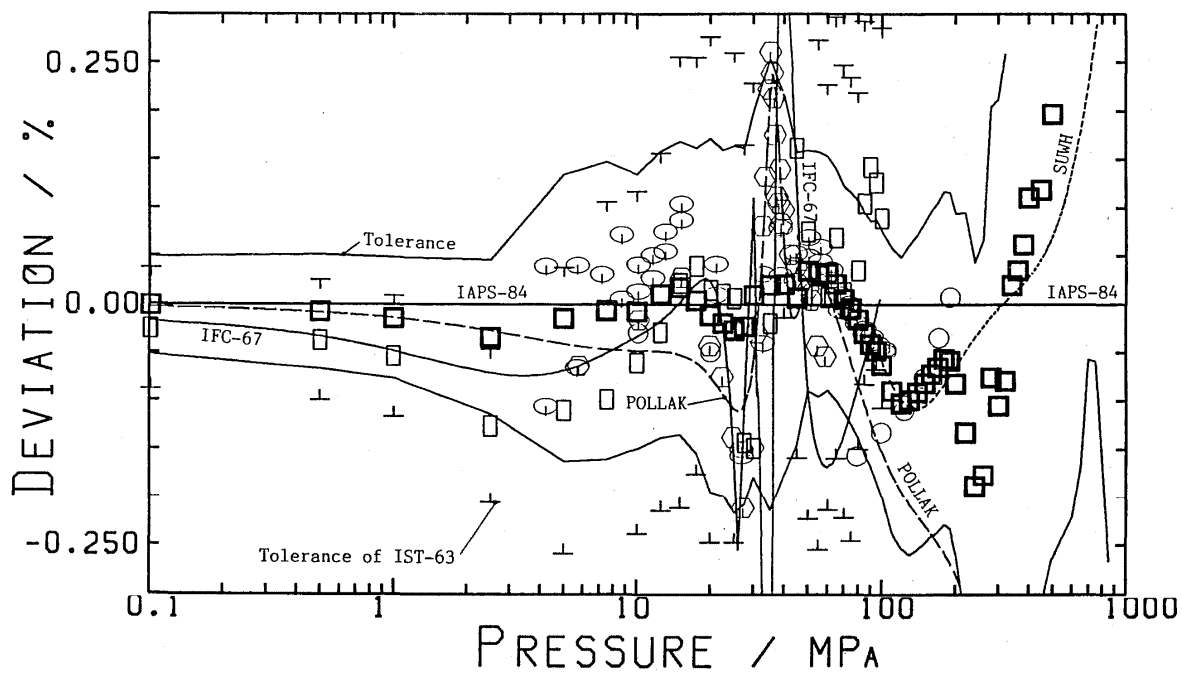


FIG. A.II.15a. Specific volume deviation from IAPS-84 at 698.15 K against logarithmic pressure scale.

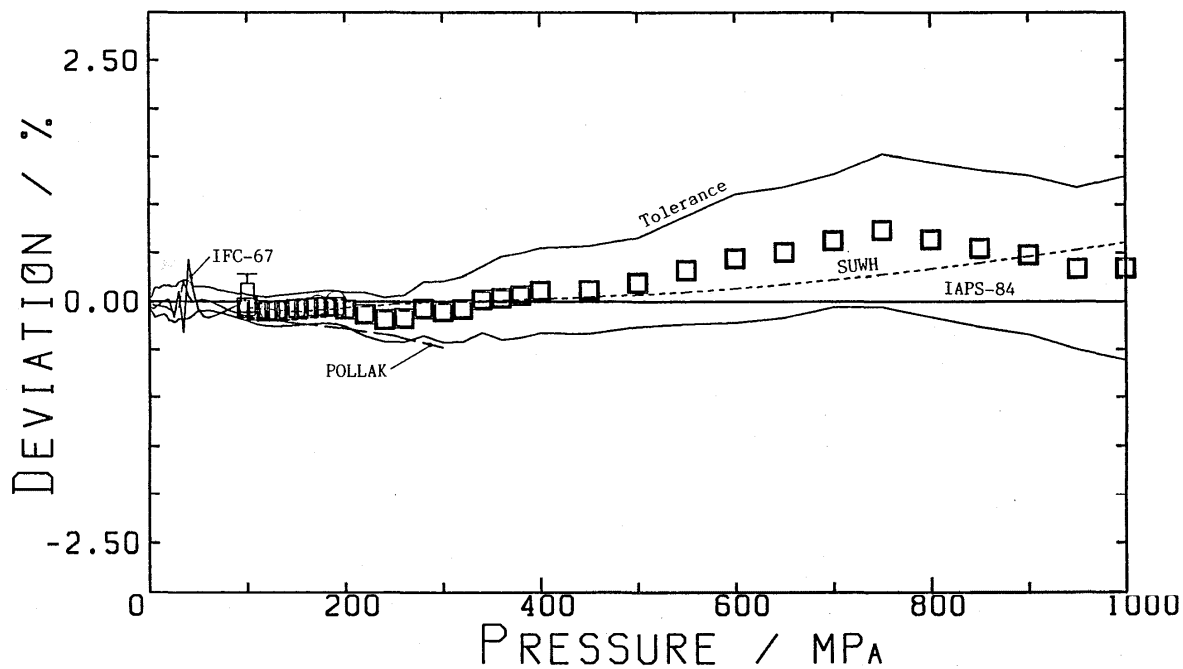


FIG. A.II.15b. Specific volume deviation from IAPS-84 at 698.15 K against pressure.

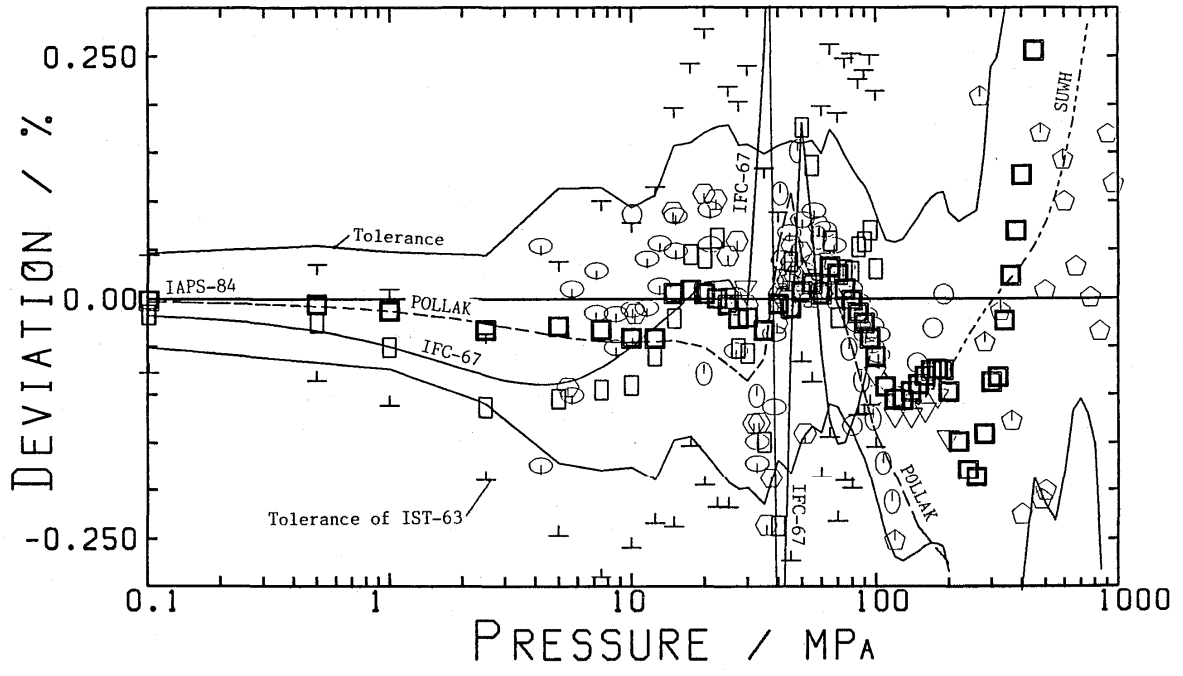


FIG. A.II.16a. Specific volume deviation from IAPS-84 at 723.15 K against logarithmic pressure scale.

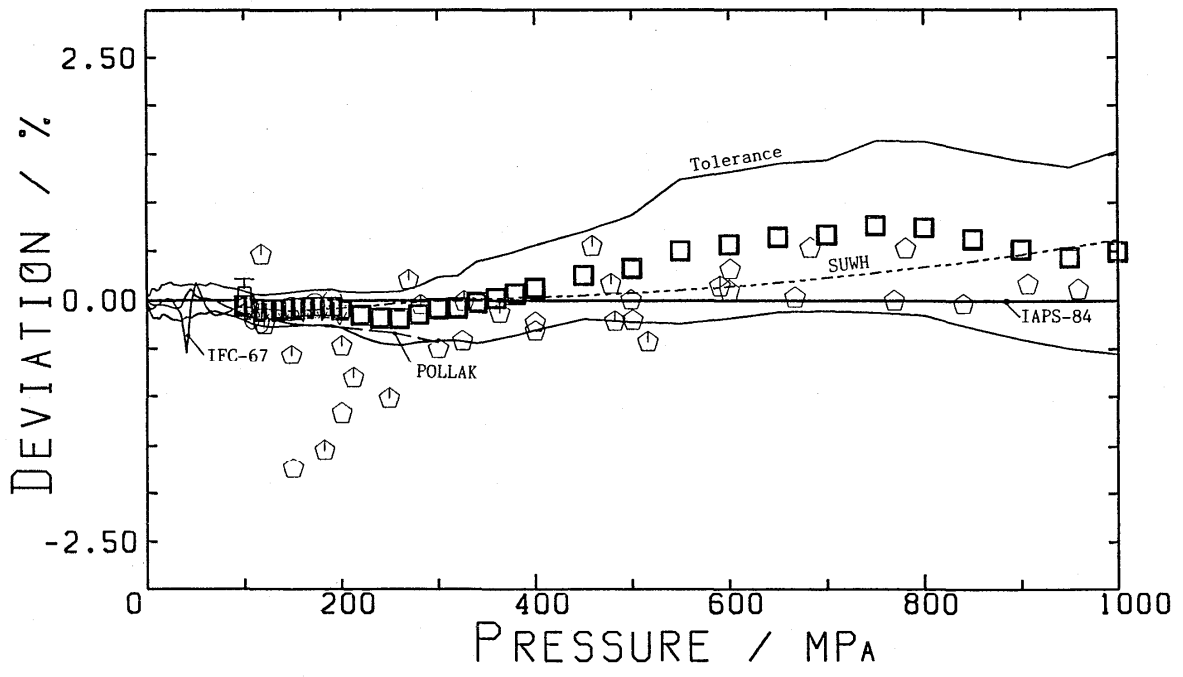


FIG. A.II.16b. Specific volume deviation from IAPS-84 at 723.15 K against pressure.

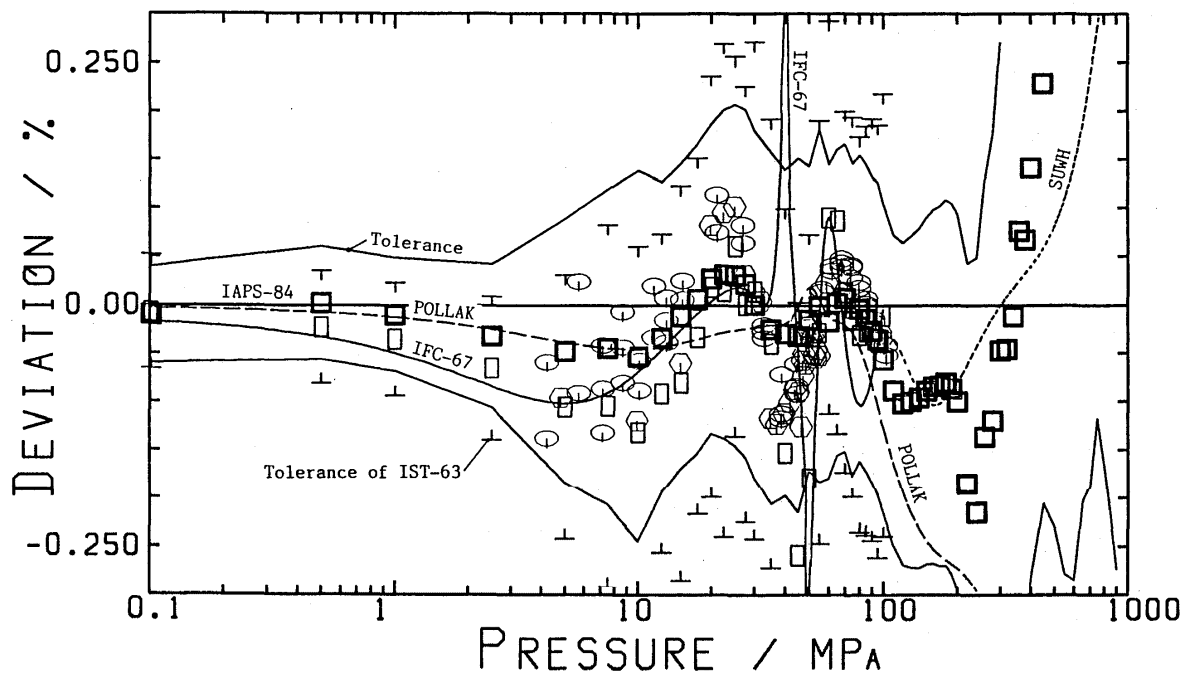


FIG. A.II.17a. Specific volume deviation from IAPS-84 at 748.15 K against logarithmic pressure scale.

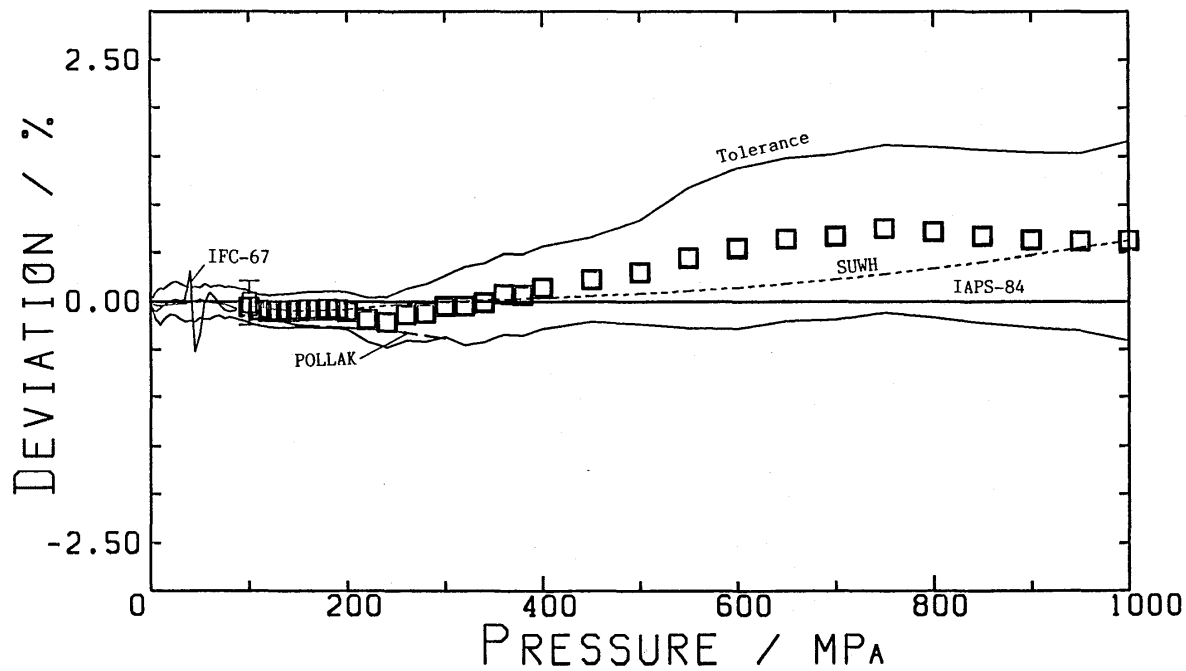


FIG. A.II.17b. Specific volume deviation from IAPS-84 at 748.15 K against pressure.

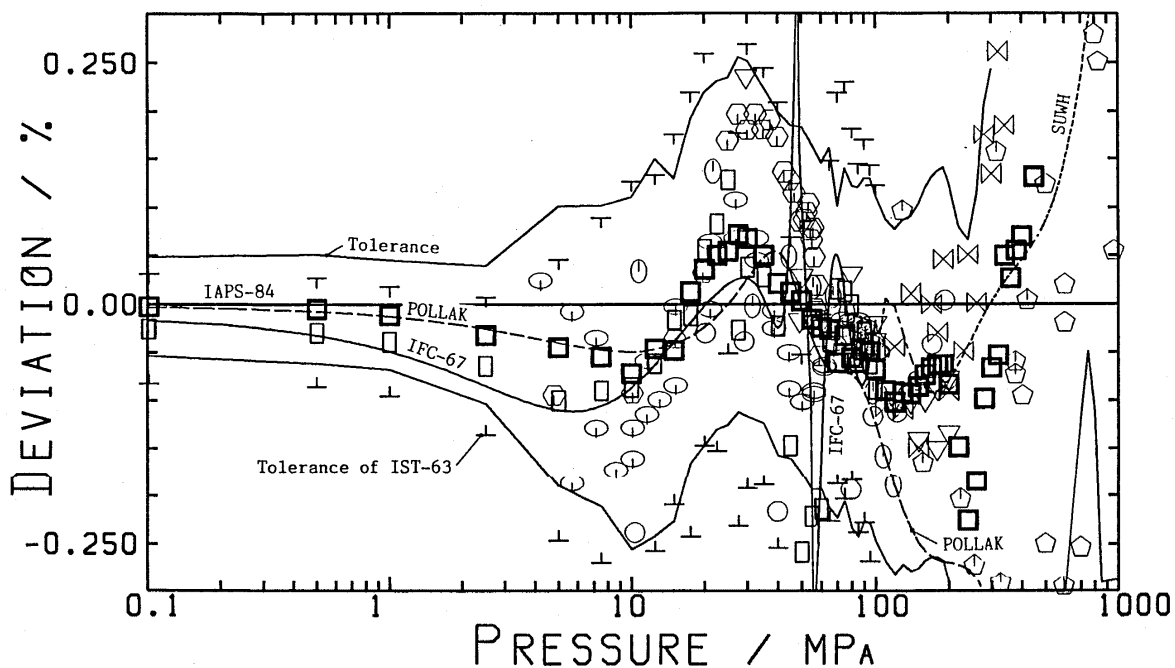


FIG. A.II.18a. Specific volume deviation from IAPS-84 at 773.15 K against logarithmic pressure scale.

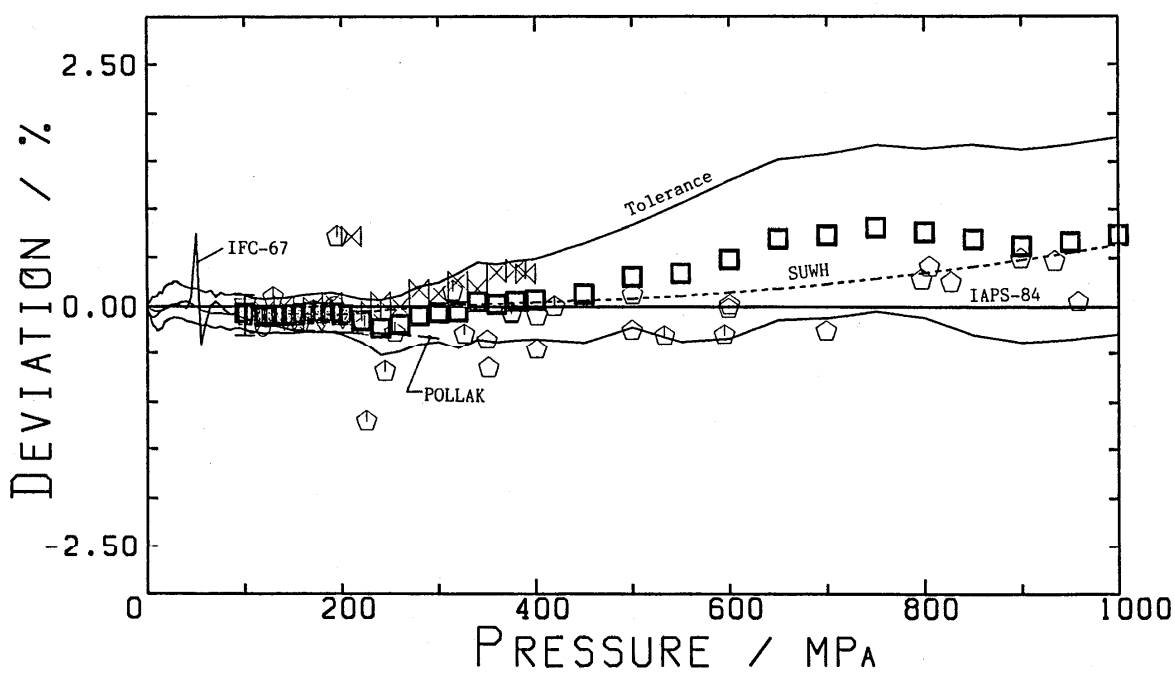


FIG. A.II.18b. Specific volume deviation from IAPS-84 at 773.15 K against pressure.



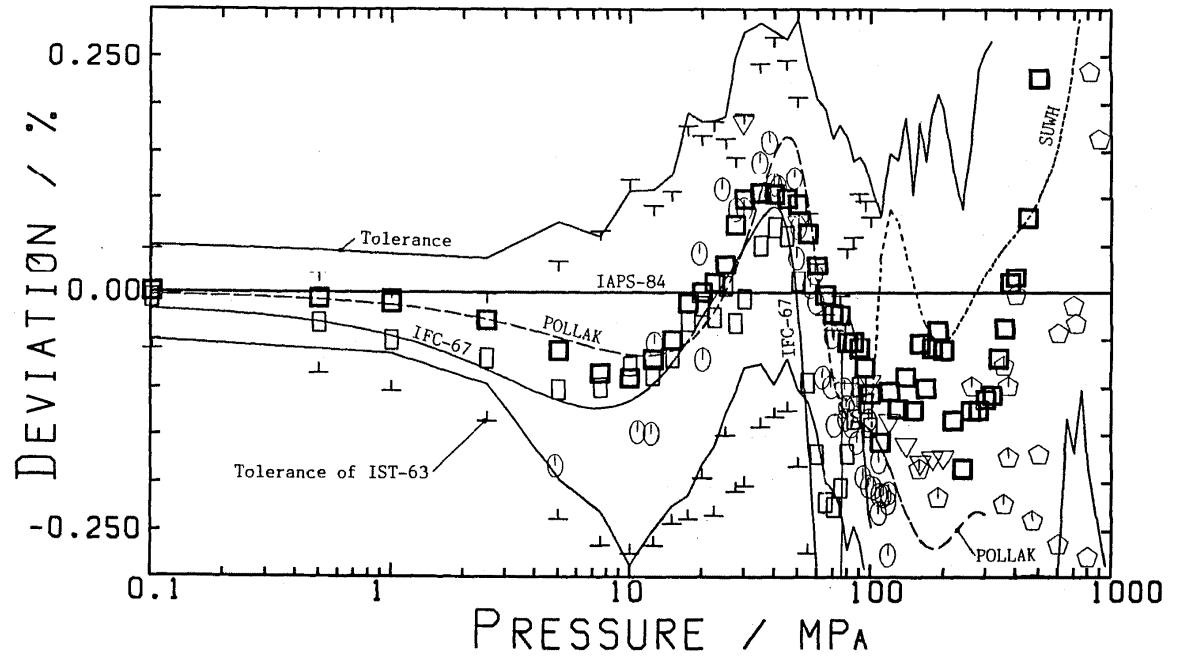


FIG. A.II.19a. Specific volume deviation from IAPS-84 at 823.15 K against logarithmic pressure scale.

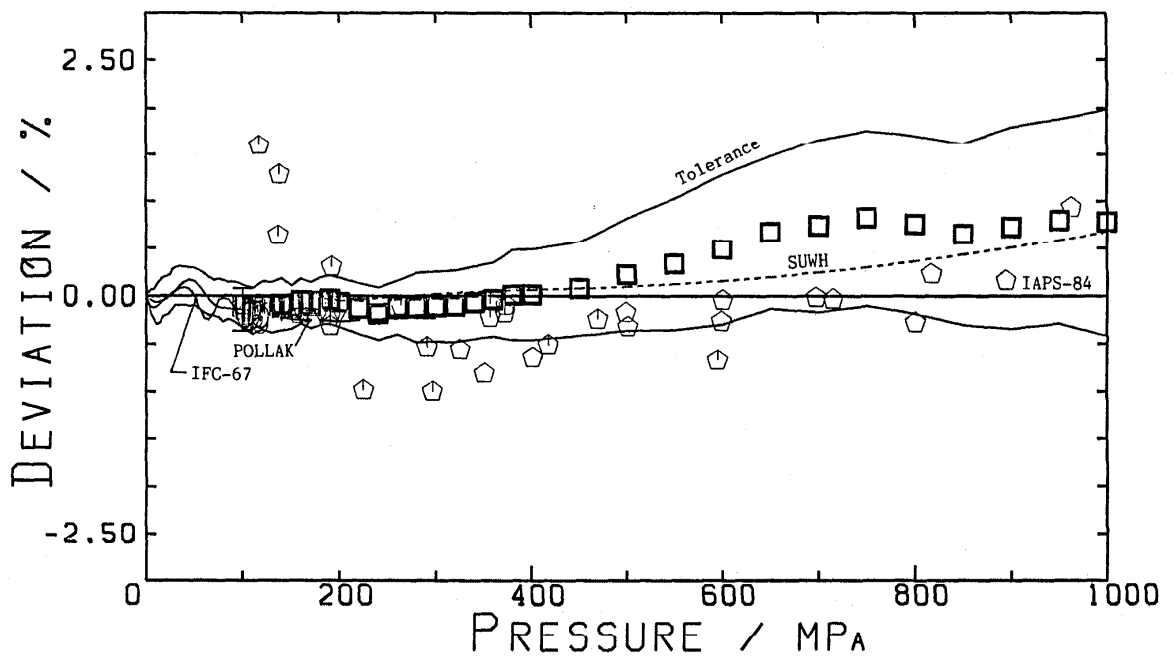


FIG. A.II.19b. Specific volume deviation from IAPS-84 at 823.15 K against pressure.

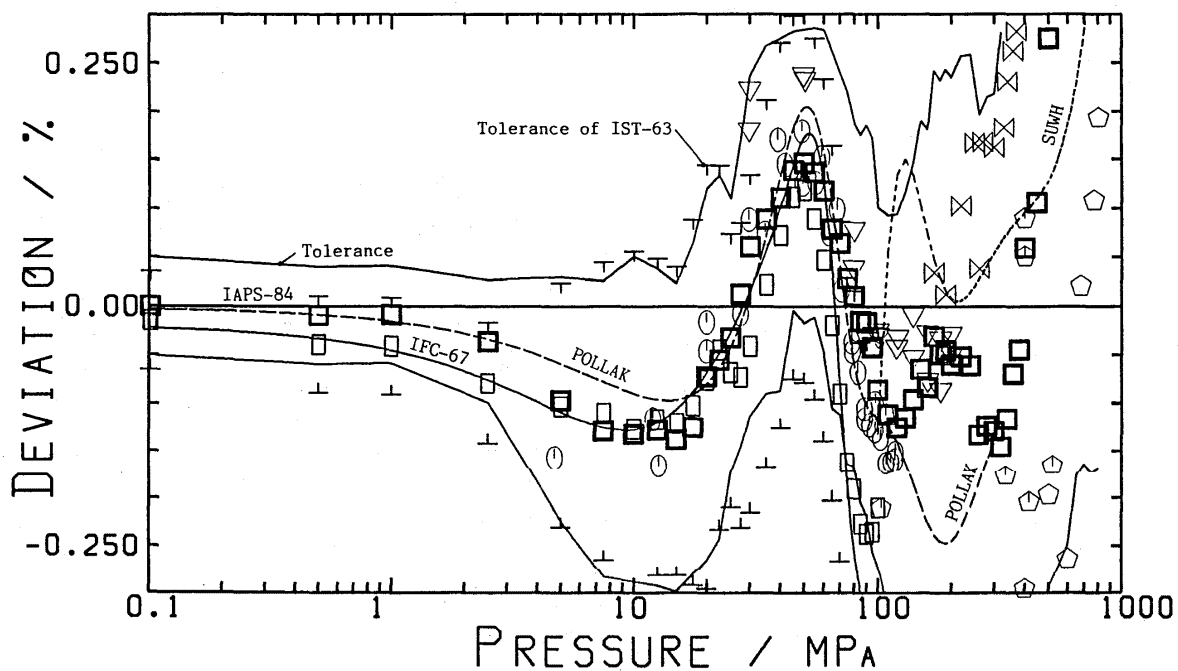


FIG. A.II.20a. Specific volume deviation from IAPS-84 at 873.15 K against logarithmic pressure scale.

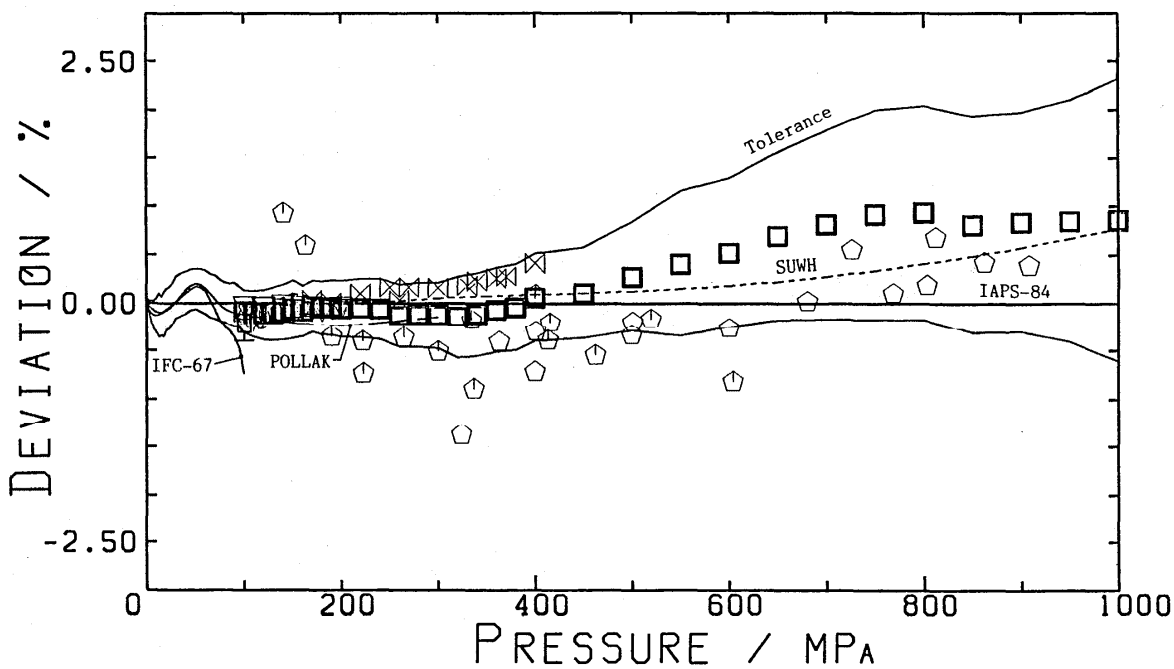


FIG. A.II.20b. Specific volume deviation from IAPS-84 at 873.15 K against pressure.

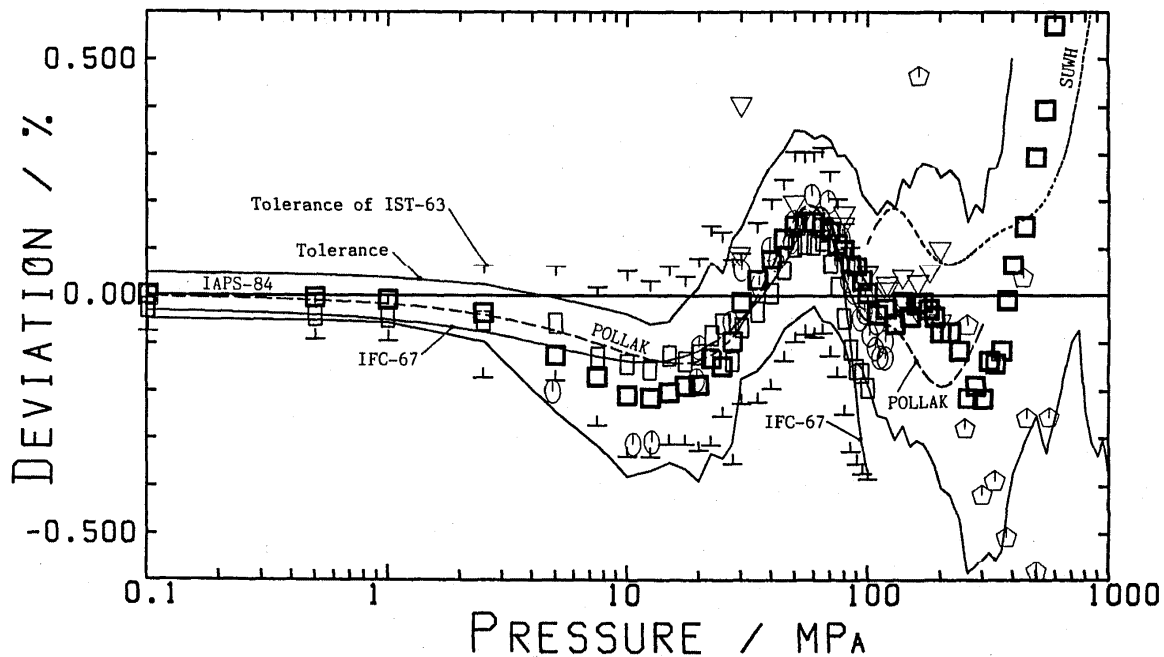


FIG. A.II.21a. Specific volume deviation from IAPS-84 at 923.15 K against logarithmic pressure scale.

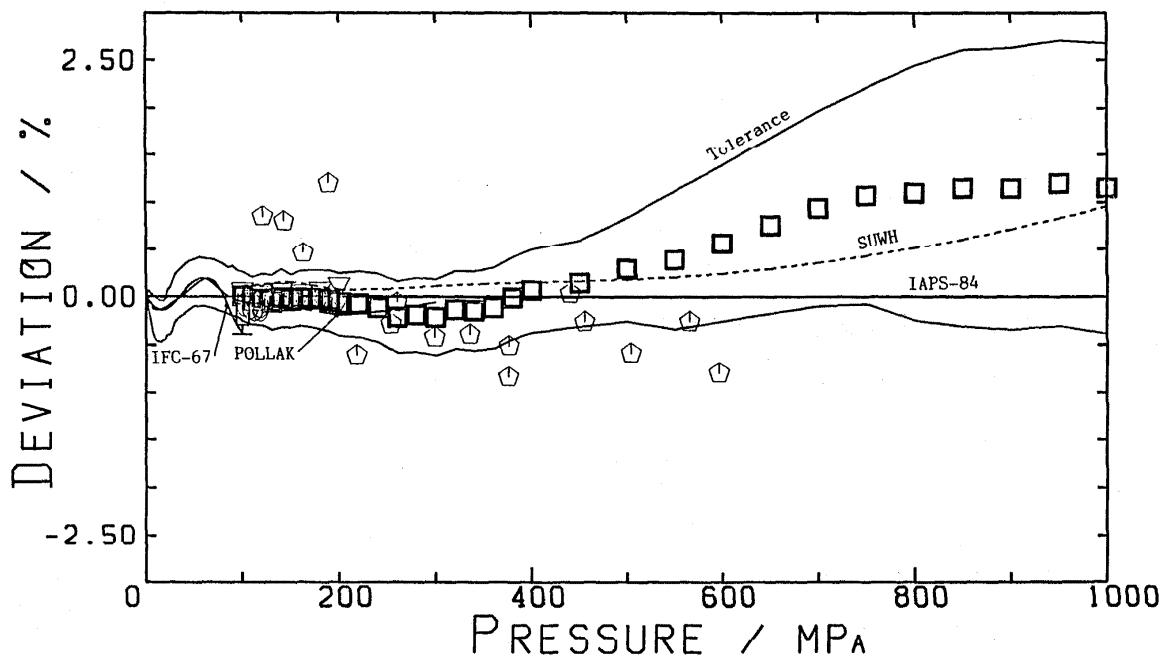


FIG. A.II.21b. Specific volume deviation from IAPS-84 at 923.15 K against pressure.

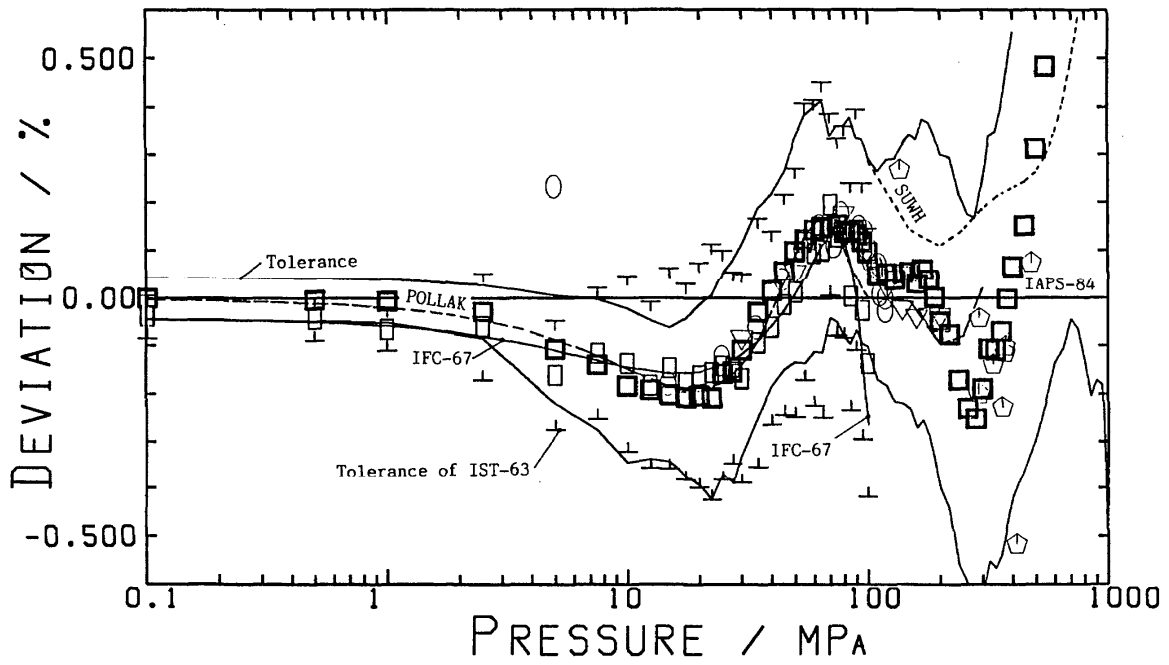


FIG. A.II.22a. Specific volume deviation from IAPS-84 at 973.15 K against logarithmic pressure scale.

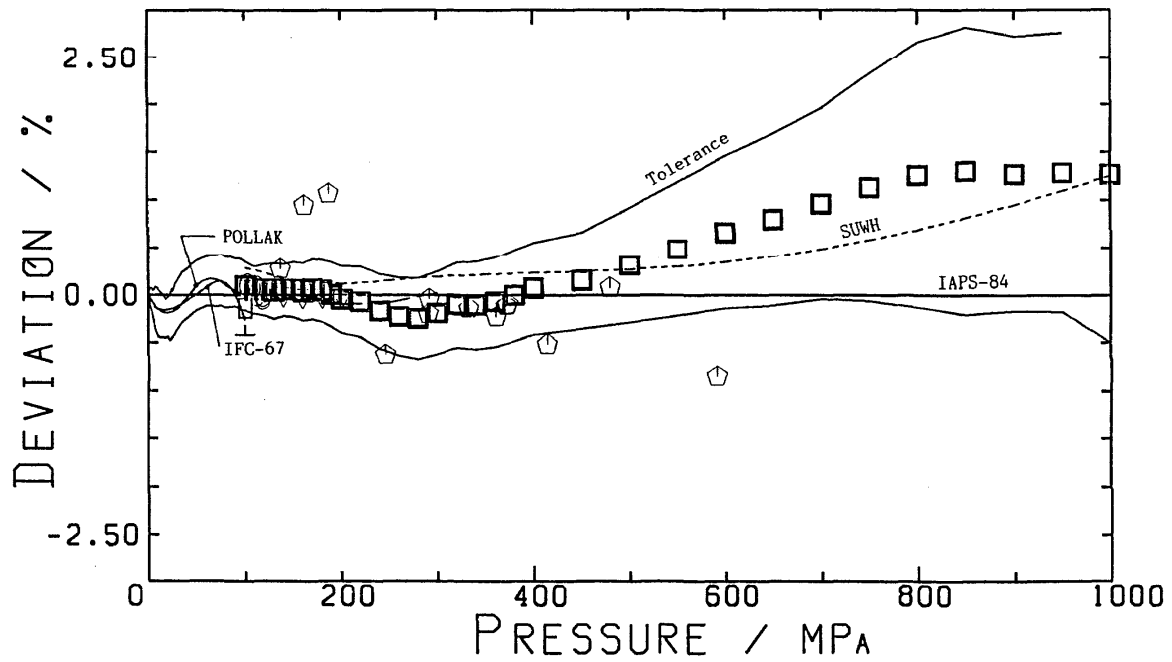


FIG. A.II.22b. Specific volume deviation from IAPS-84 at 973.15 K against pressure.

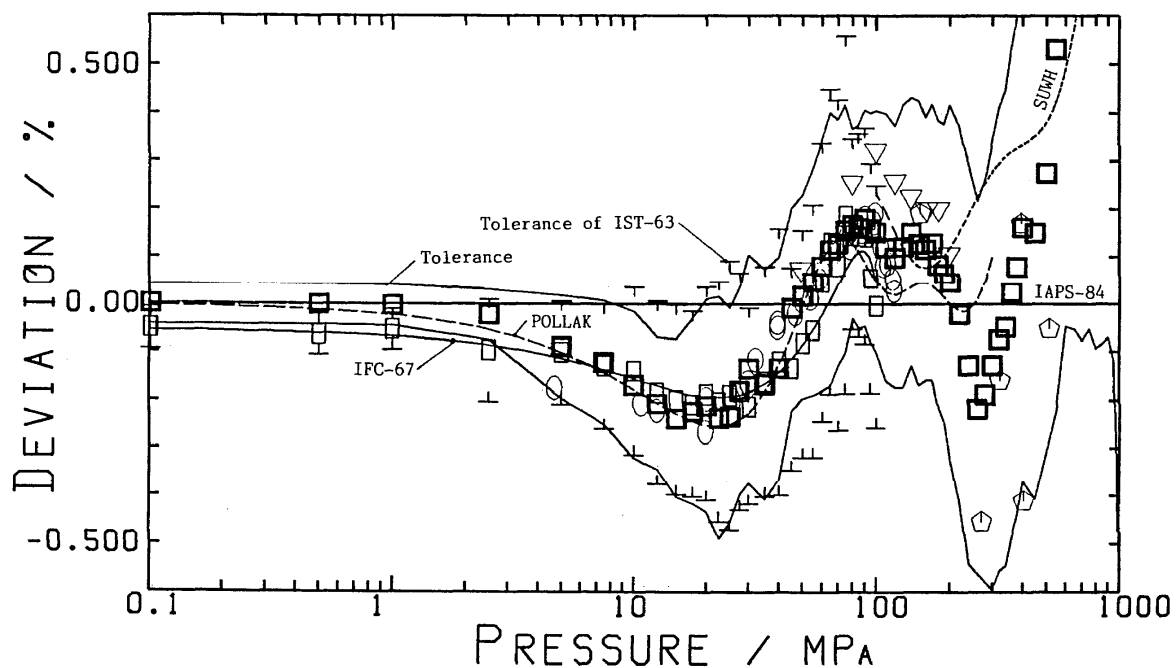


FIG. A.II.23a. Specific volume deviation from IAPS-84 at 1023.15 K against logarithmic pressure scale.

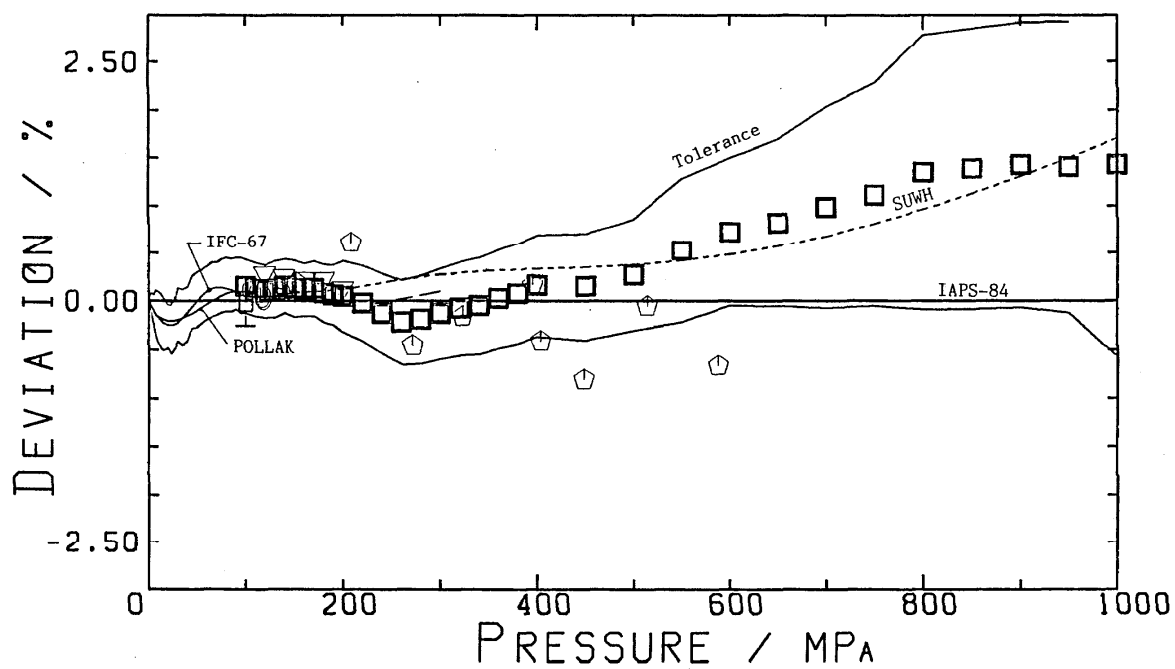


FIG. A.II.23b. Specific volume deviation from IAPS-84 at 1023.15 K against pressure.

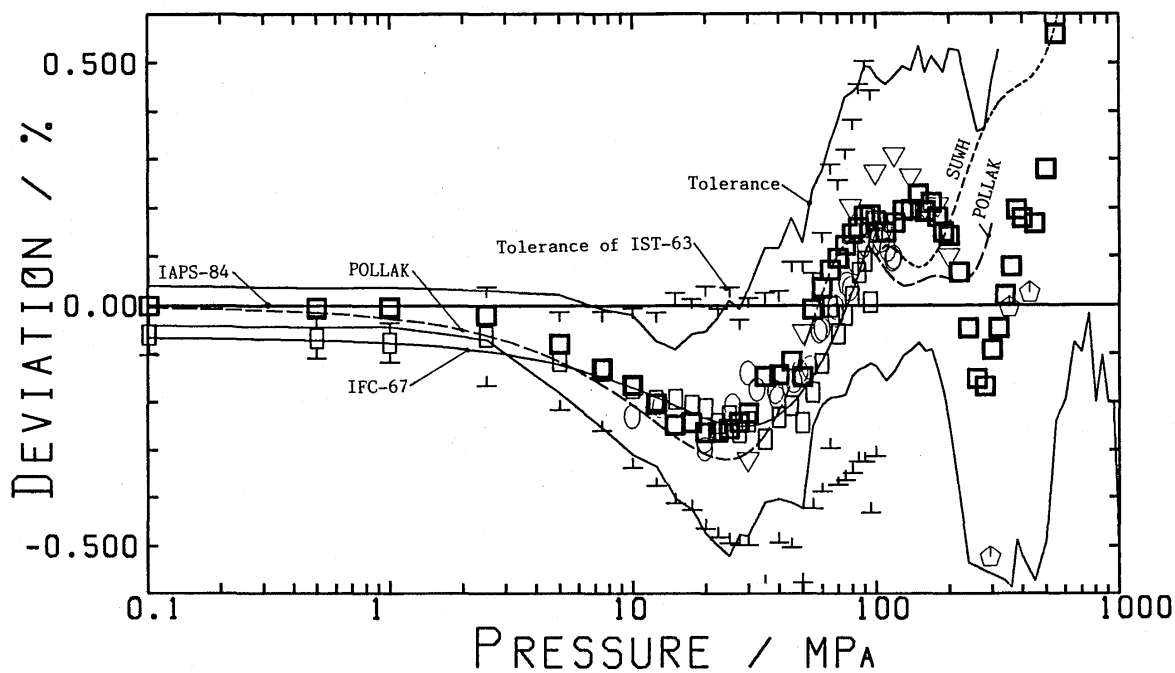


FIG. A.II.24a. Specific volume deviation from IAPS-84 at 1073.15 K against logarithmic pressure scale.

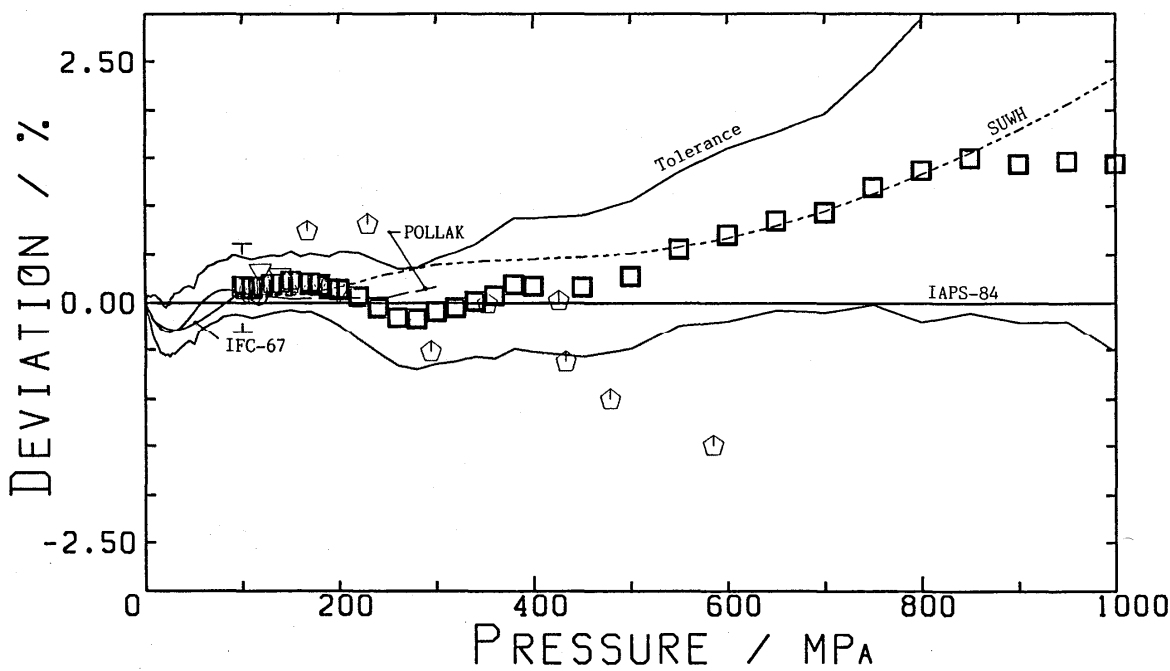


FIG. A.II.24b. Specific volume deviation from IAPS-84 at 1073.15 K against pressure.

## Appendix III

Comparison of the available enthalpy values of water with the present skeleton table values along the isotherms between 273.15 and 1073.15 K in the pressure range up to 1 GPa. Percent deviations of the enthalpy values from the IAPS Formulation 1984 (IAPS-84) are plotted in the figures.

Table A.III.1. The lines and marks in Figs. A.III.1a-24b

————	The IFC Formulation for Industrial Use (IFC-67)
-----	Equation developed by Pollak, R., 1974
-----	Equation developed by Sato, H., Uematsu M., and Watanabe, K., 1981(SUWH)
-----	Equation developed by Sato, H., Uematsu M., and Watanabe, K., 1985(SUWL)
◇	Angus and Newitt (1966) <sup>99</sup>
□	Callendar and Egerton (1960) <sup>97</sup>
▽	Havliček and Miškovský (1936) <sup>93</sup>
△	Osborne, et al. (1937) <sup>105</sup>
△	Osborne, et al. (1939) <sup>107</sup>
◇	Sheindlin and Gorbunova (1964) <sup>98</sup>
⊙	Vukalovich, et al. (1958) <sup>94</sup>
⊙	Vukalovich, et al. (1962) <sup>95</sup>
○	Vukalovich, et al. (1963) <sup>96</sup>
+	
□	IST-63 value and the associated tolerance
+	
∨	
□	IST-85 value and the associated tolerance
∨	

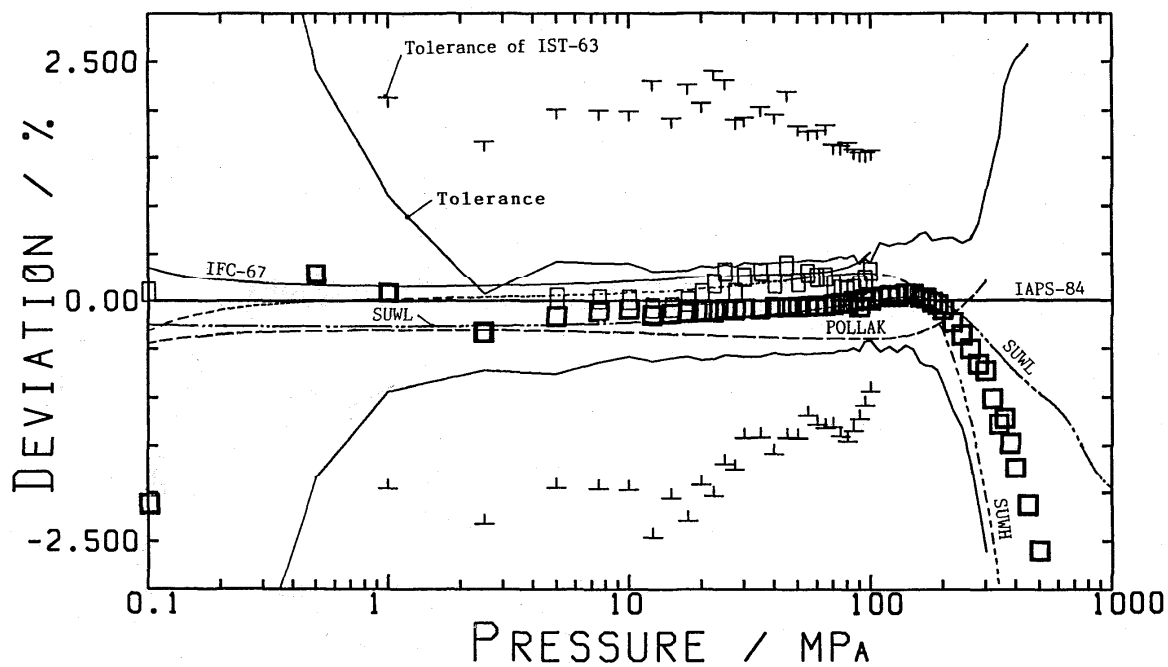


FIG. A.III.1a. Enthalpy deviation from IAPS-84 at 273.15 K against logarithmic pressure scale.

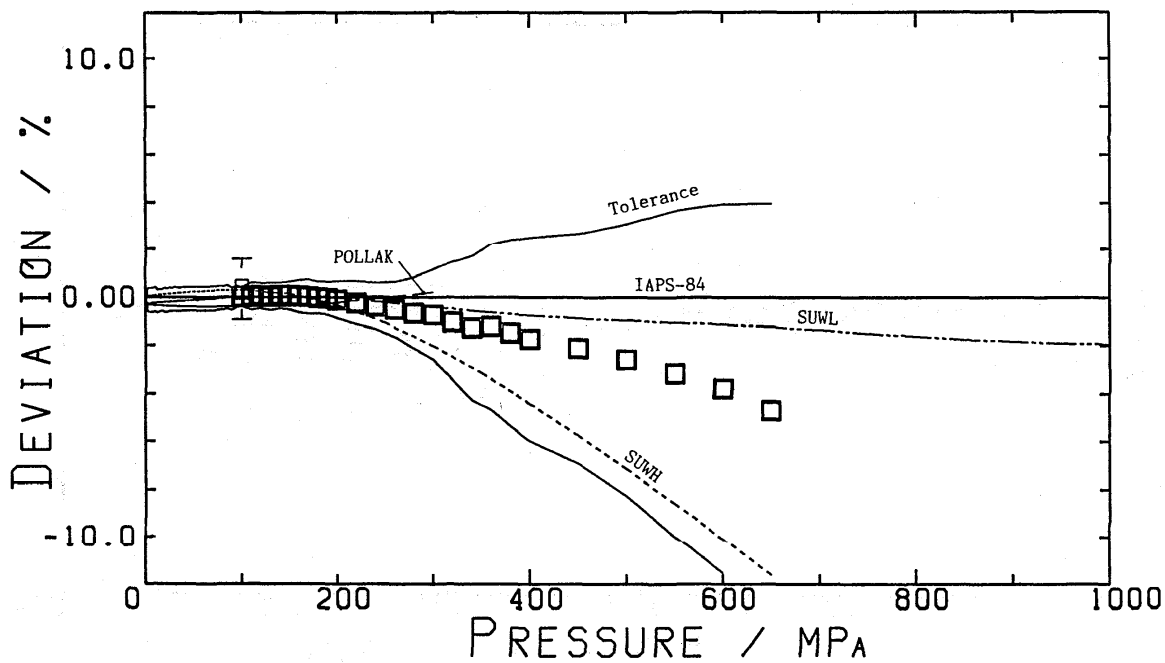


FIG. A.III.1b. Enthalpy deviation from IAPS-84 at 273.15 K against pressure.



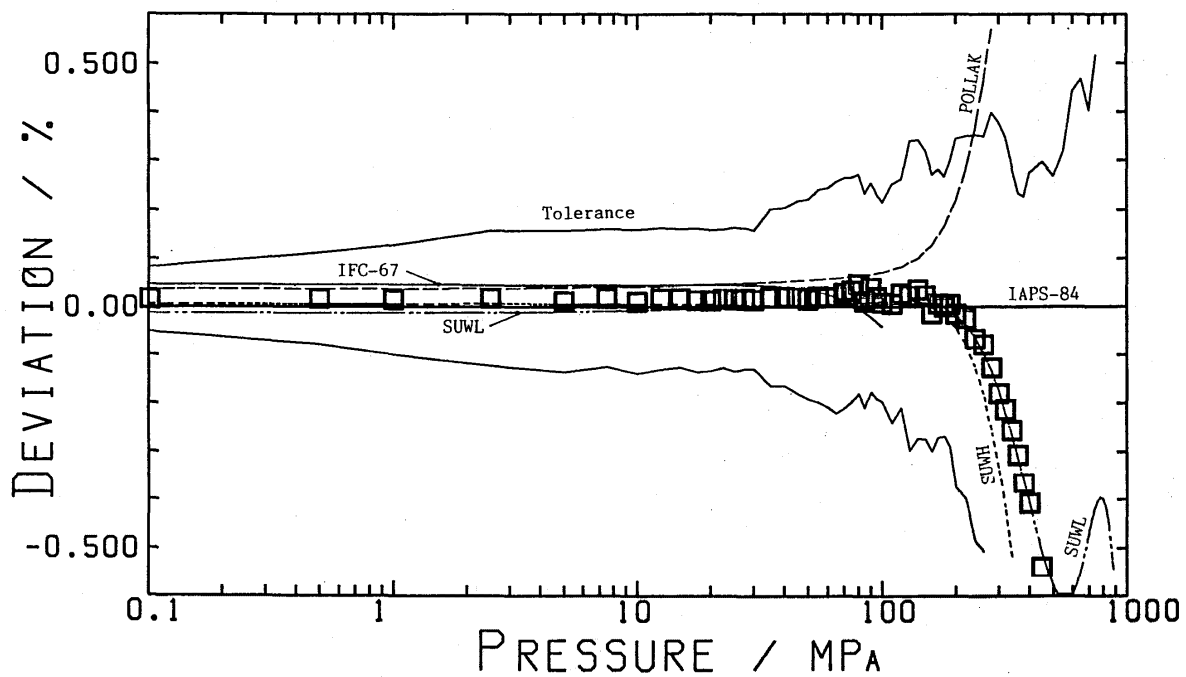


FIG. A.III.2a. Enthalpy deviation from IAPS-84 at 298.15 K against logarithmic pressure scale.

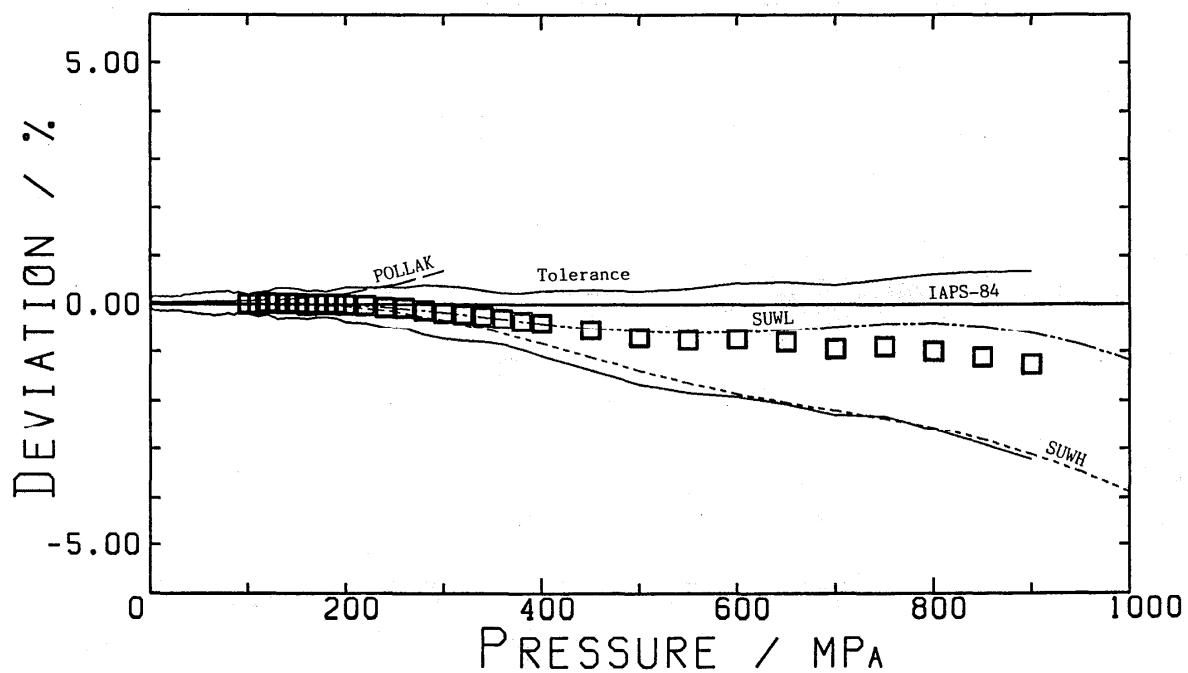


FIG. A.III.2b. Enthalpy deviation from IAPS-84 at 298.15 K against pressure.

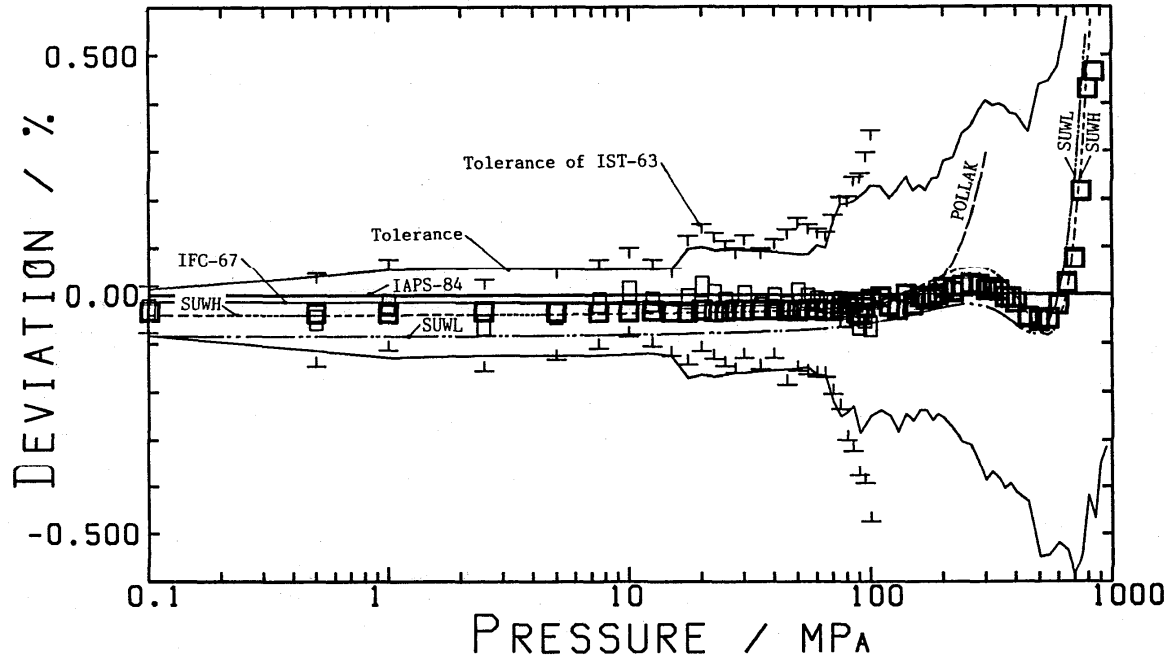


FIG. A.III.3a. Enthalpy deviation from IAPS-84 at 323.15 K against logarithmic pressure scale.

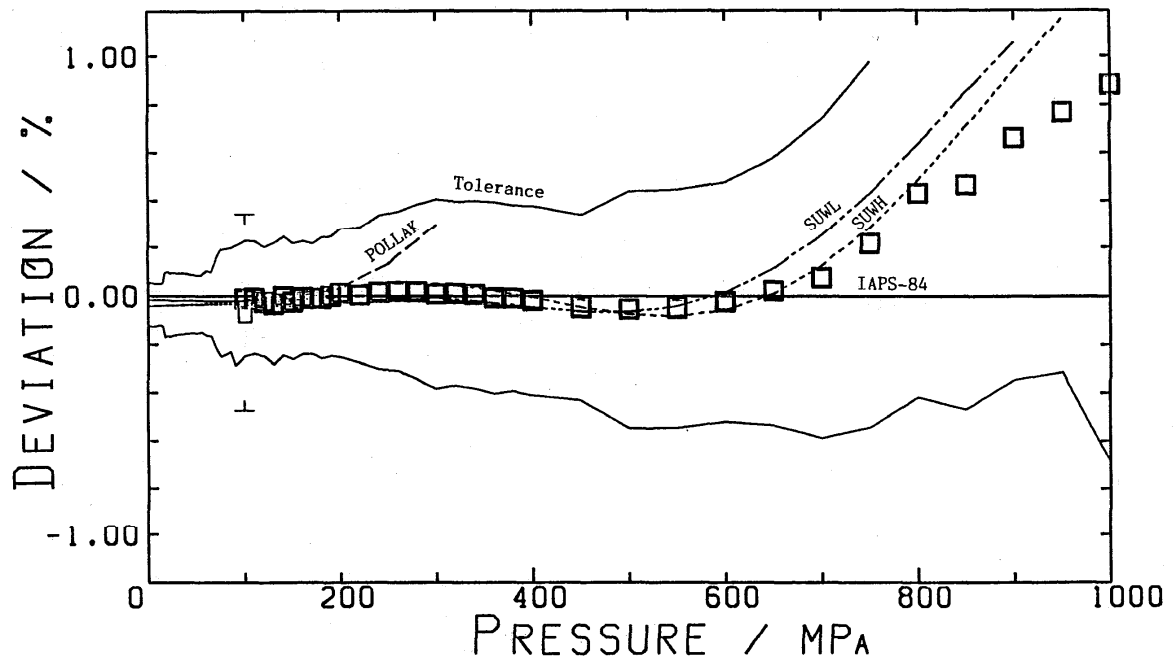


FIG. A.III.3b. Enthalpy deviation from IAPS-84 at 323.15 K against pressure.

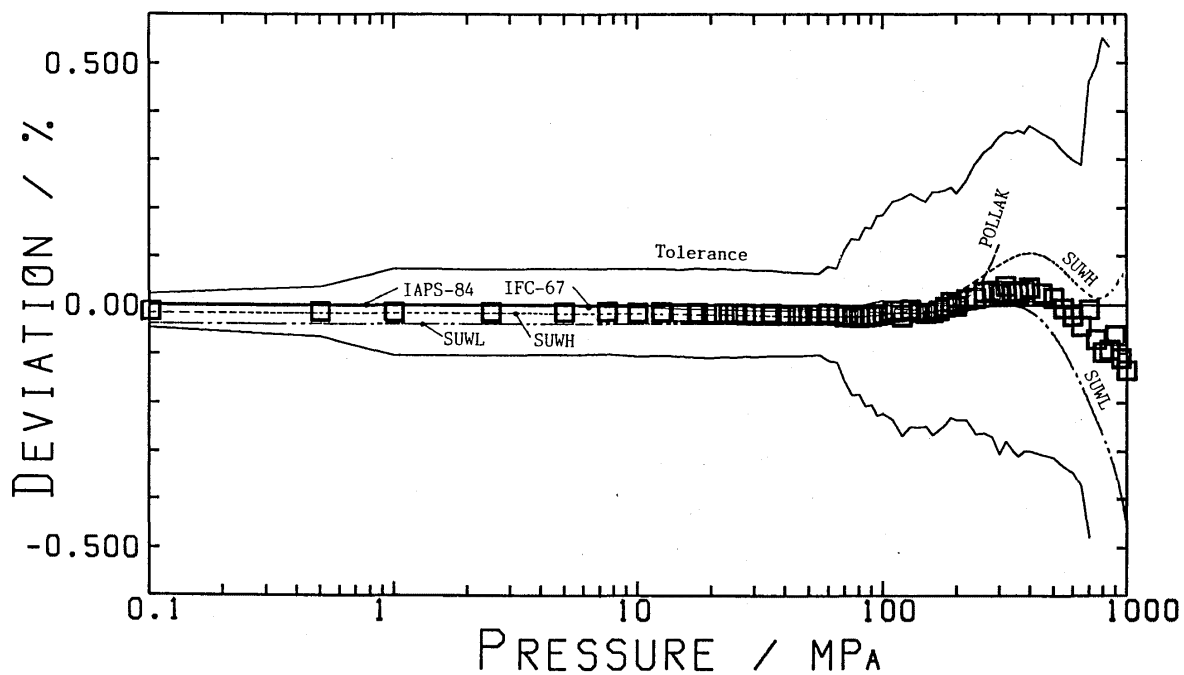


FIG. A.III.4a. Enthalpy deviation from IAPS-84 at 348.15 K against logarithmic pressure scale

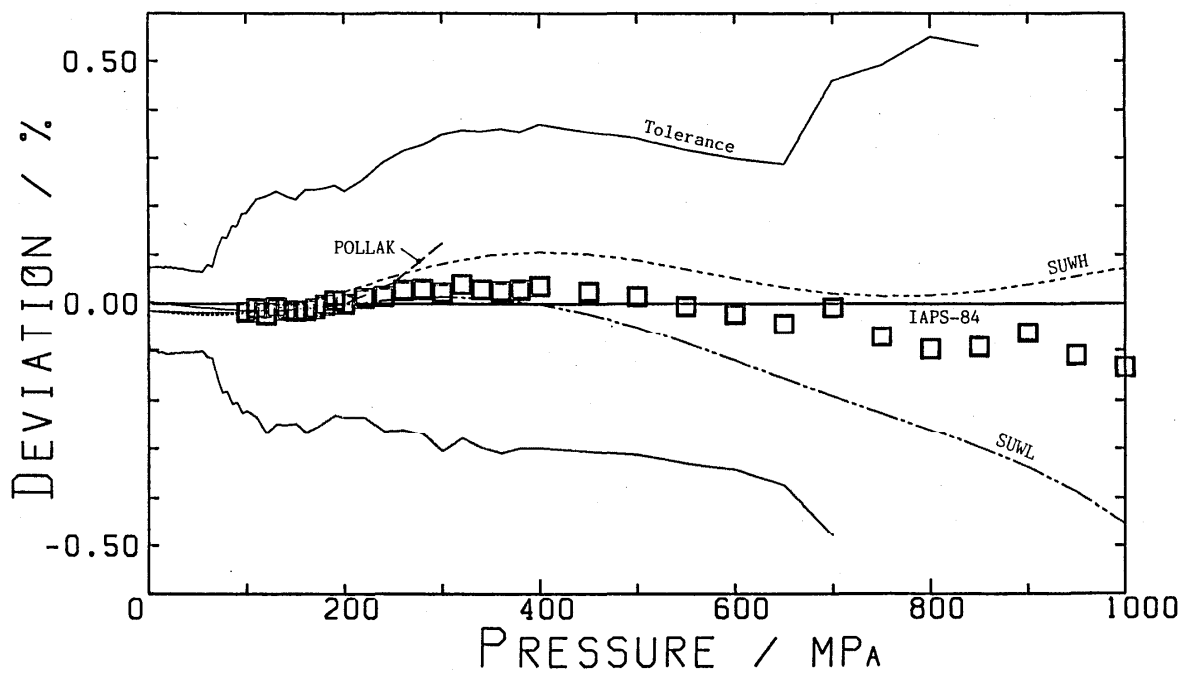


FIG. A.III.4b. Enthalpy deviation from IAPS-84 at 348.15 K against pressure.

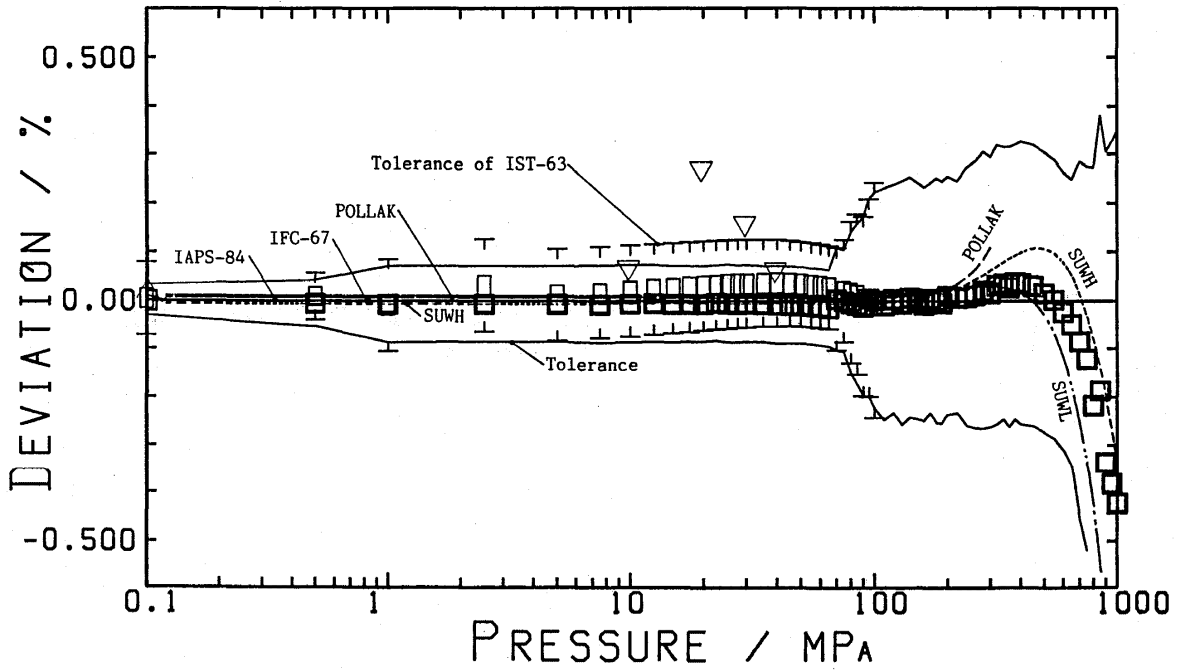


FIG. A.III.5a. Enthalpy deviation from IAPS-84 at 373.15 K against logarithmic pressure scale

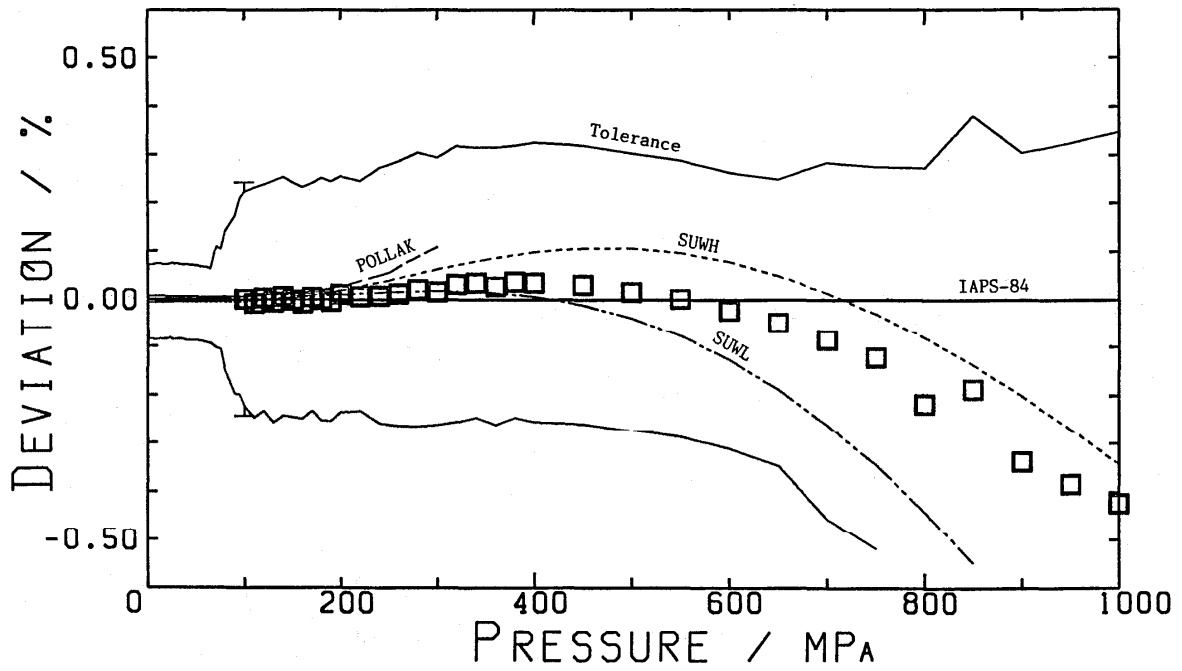


FIG. A.III.5b. Enthalpy deviation from IAPS-84 at 373.15 K against pressure.

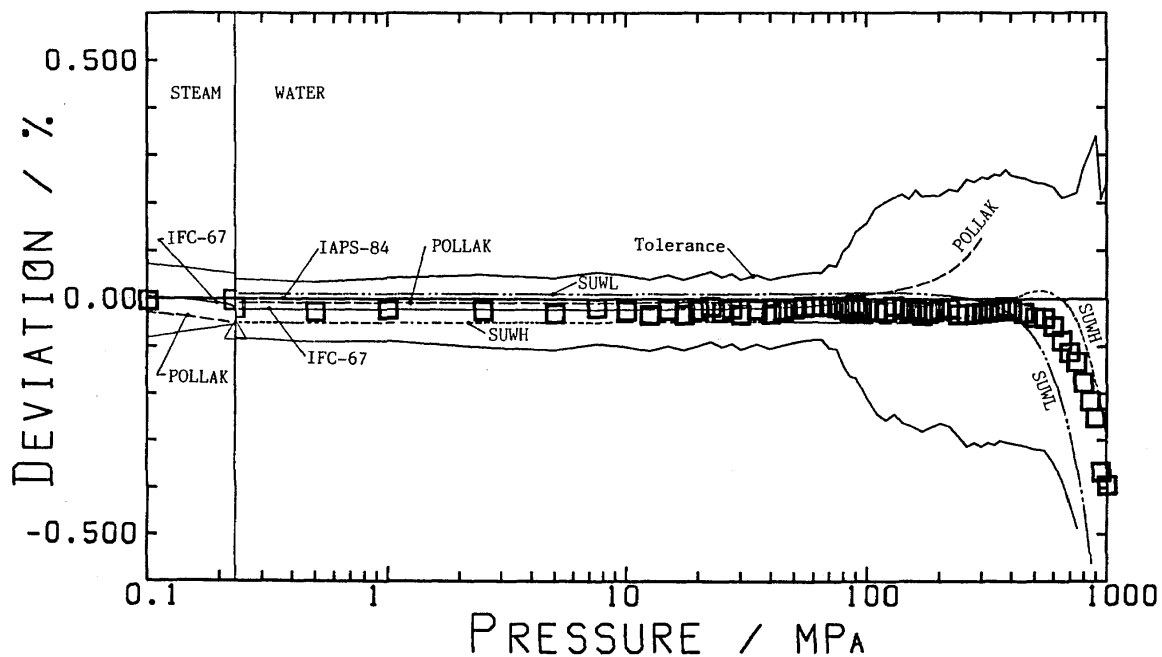


FIG. A.III.6a. Enthalpy deviation from IAPS-84 at 398.15 K against logarithmic pressure scale.

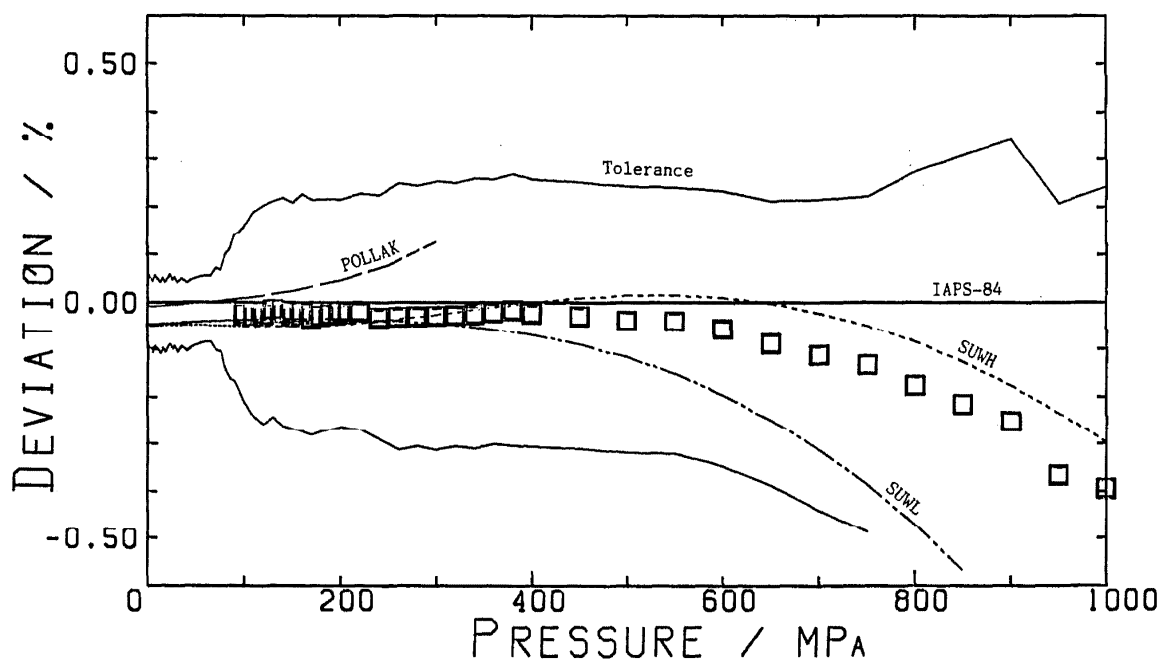


FIG. A.III.6b. Enthalpy deviation from IAPS-84 at 398.15 K against pressure.

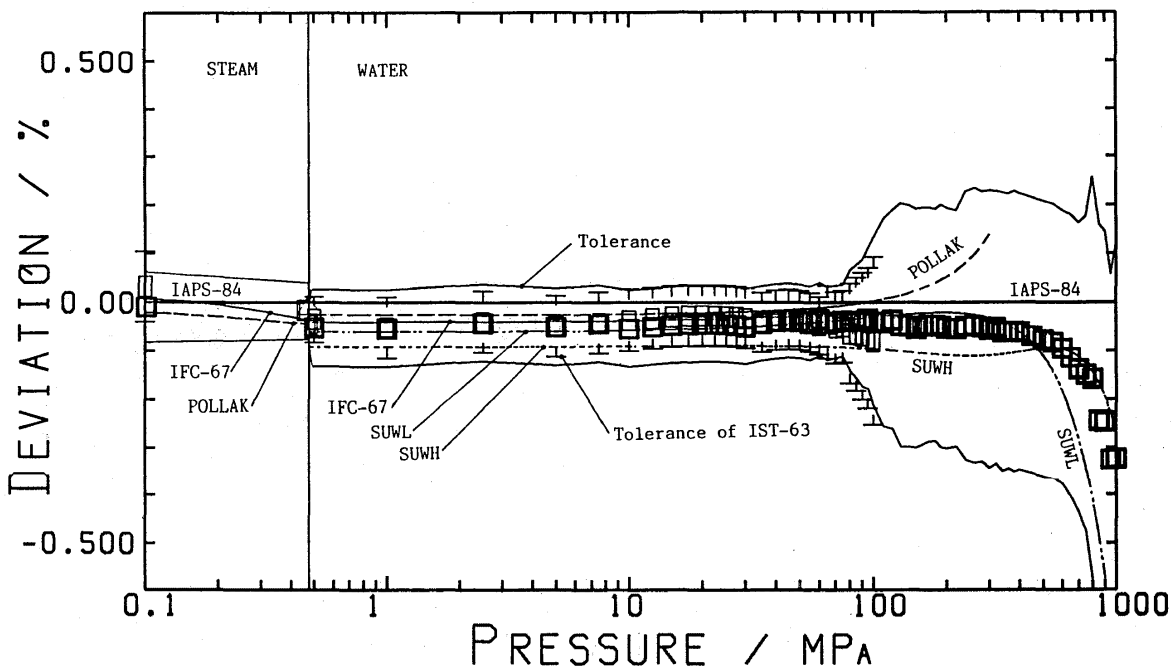


FIG. A.III.7a. Enthalpy deviation from IAPS-84 at 423.15 K against logarithmic pressure scale.

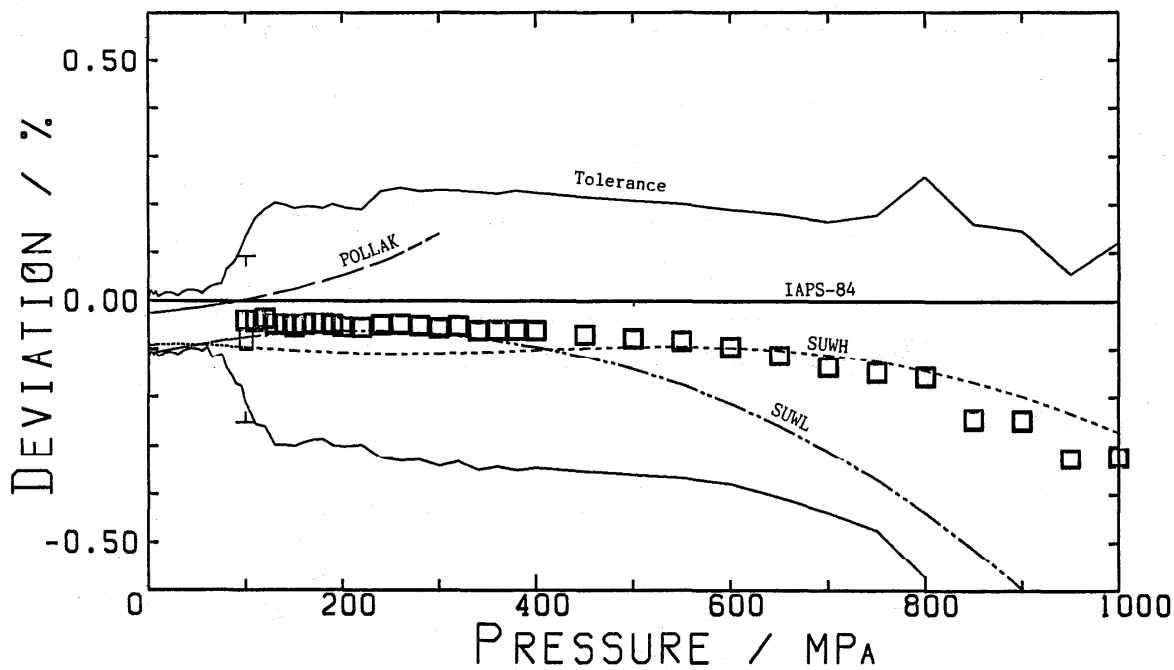


FIG. A.III.7b. Enthalpy deviation from IAPS-84 at 423.15 K against pressure.

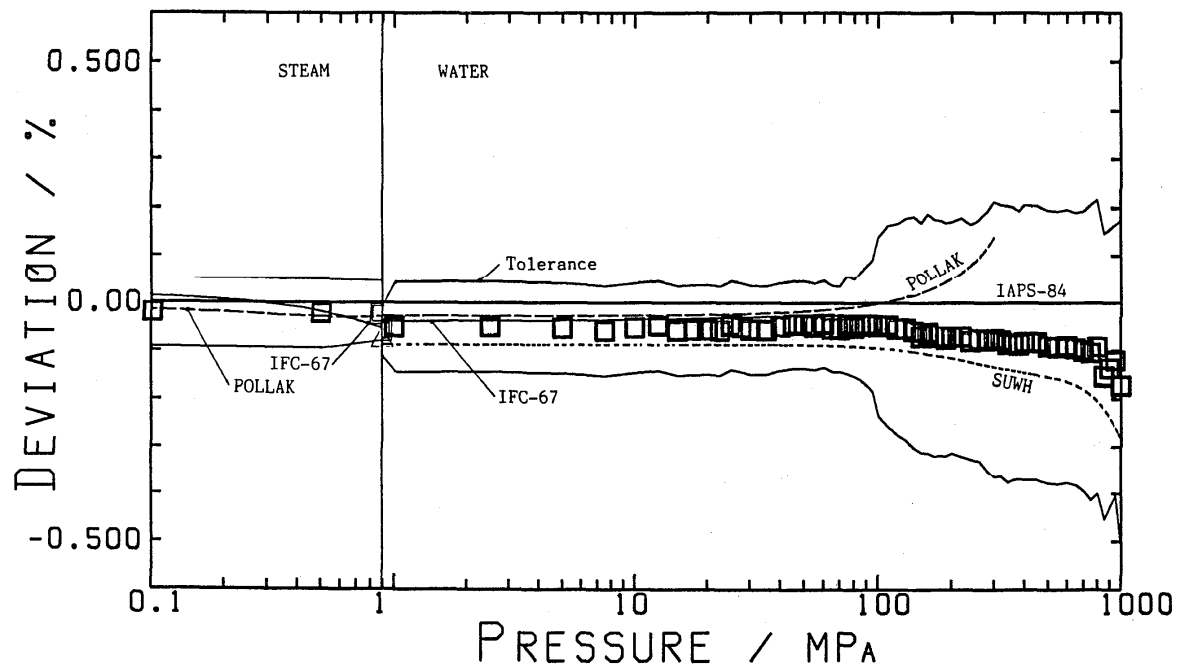


FIG. A.III.8a. Enthalpy deviation from IAPS-84 at 448.15 K against logarithmic pressure scale.

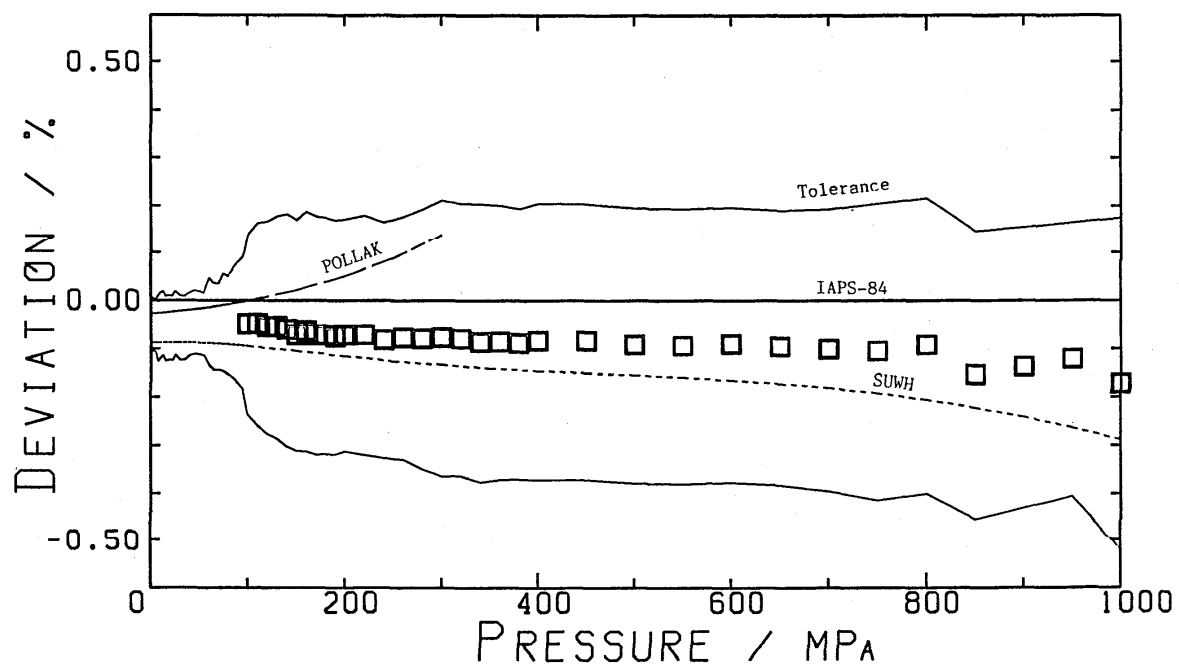


FIG. A.III.8b. Enthalpy deviation from IAPS-84 at 448.15 K against pressure.

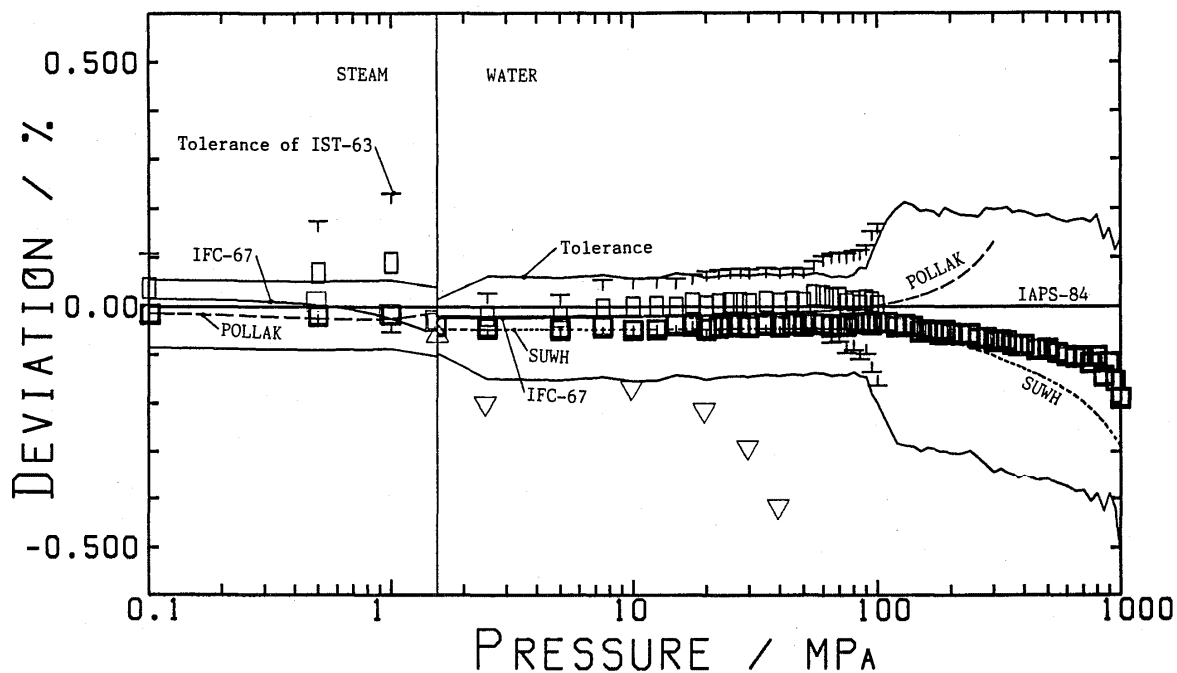


FIG. A.III.9a. Enthalpy deviation from IAPS-84 at 473.15 K against logarithmic pressure scale.

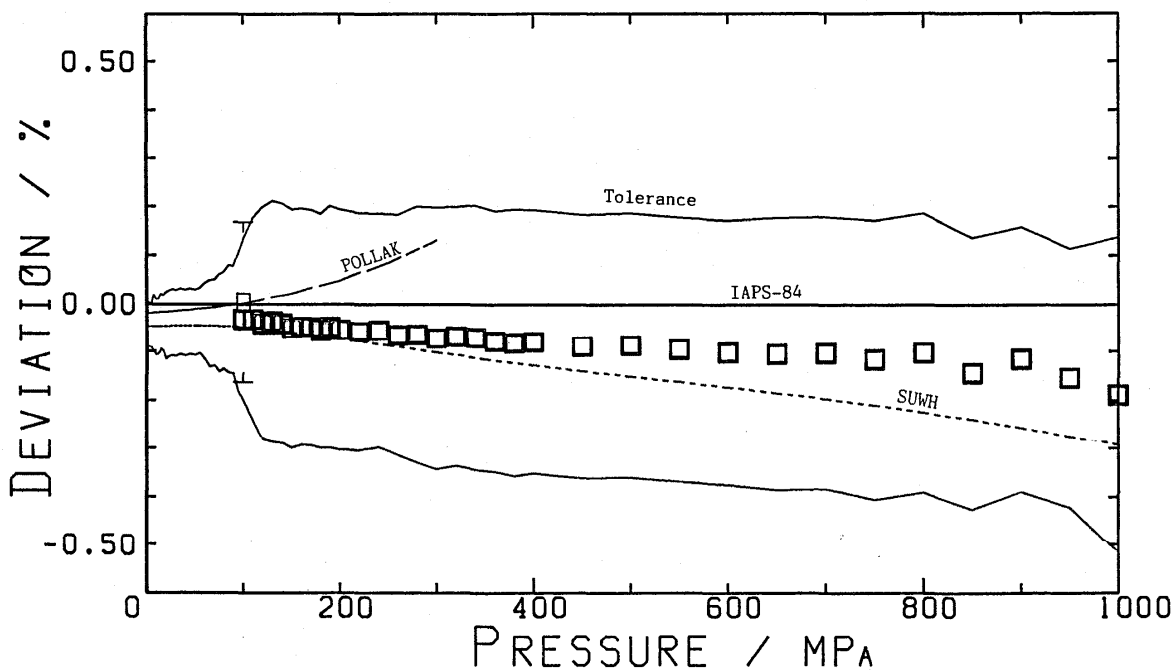


FIG. A.III.9b. Enthalpy deviation from IAPS-84 at 473.15 K against pressure.



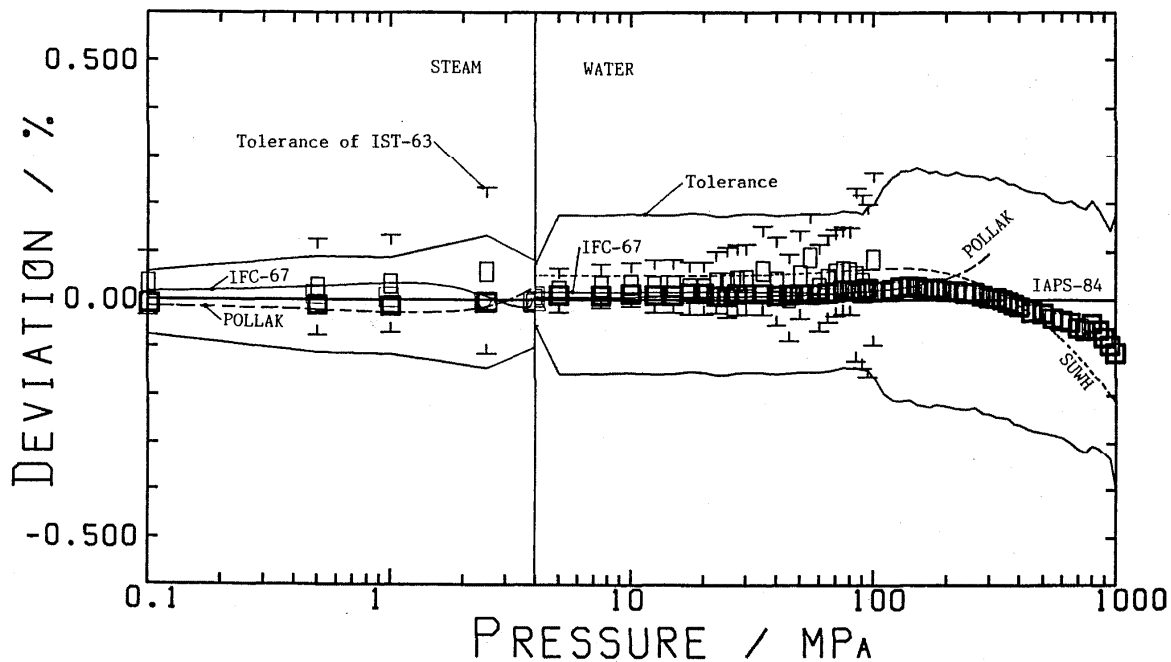


FIG. A.III.10a. Enthalpy deviation from IAPS-84 at 523.15 K against logarithmic pressure scale.

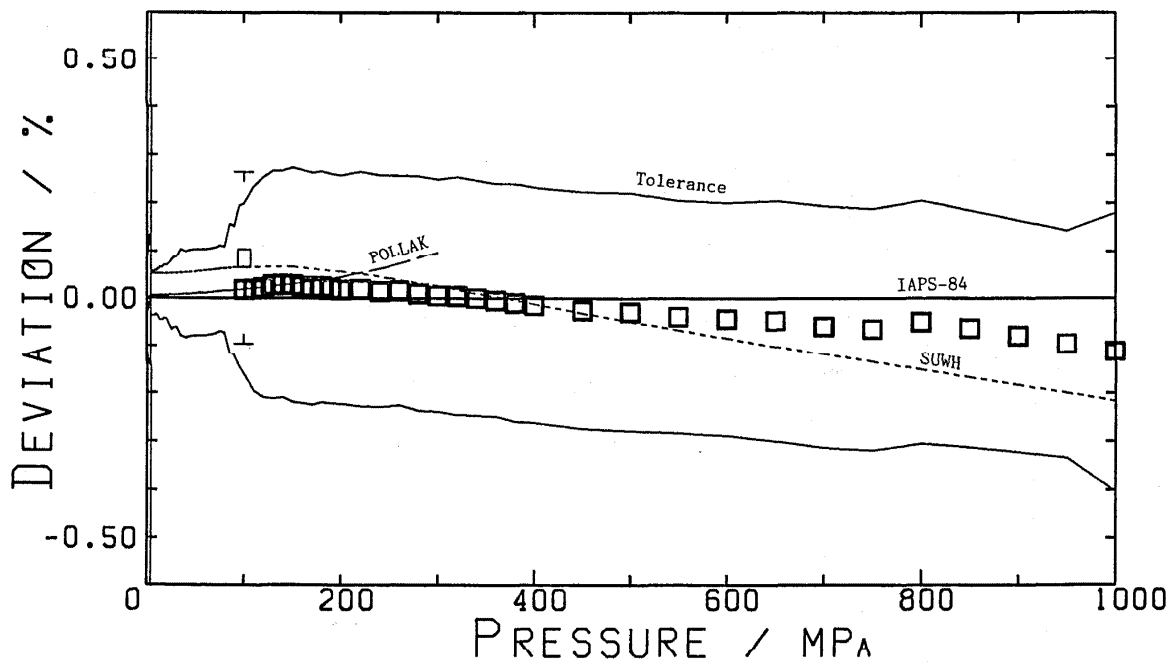


FIG. A.III.10b. Enthalpy deviation from IAPS-84 at 523.15 K against pressure.

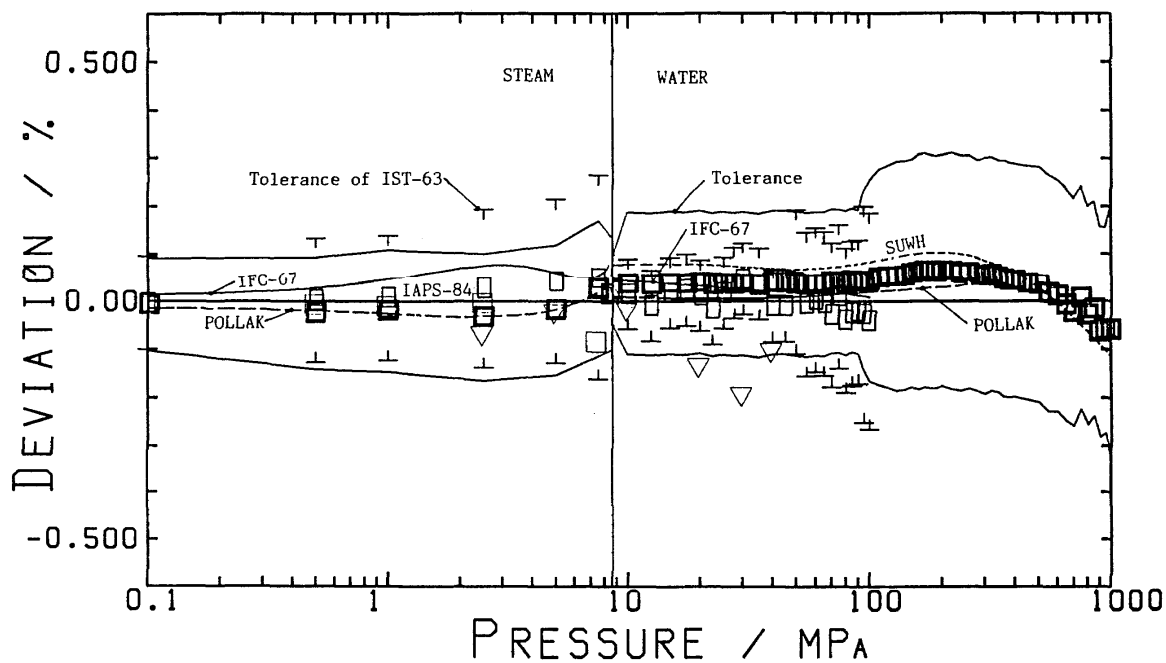


FIG. A.III.11a. Enthalpy deviation from IAPS-84 at 573.15 K against logarithmic pressure scale.

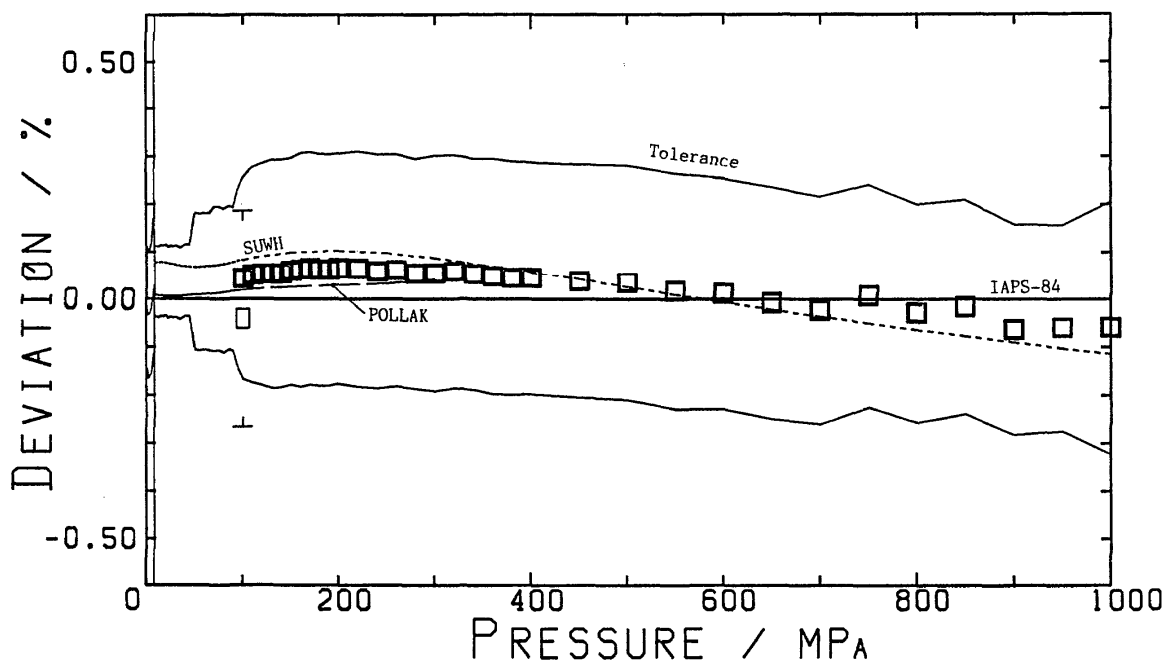


FIG. A.III.11b. Enthalpy deviation from IAPS-84 at 573.15 K against pressure.

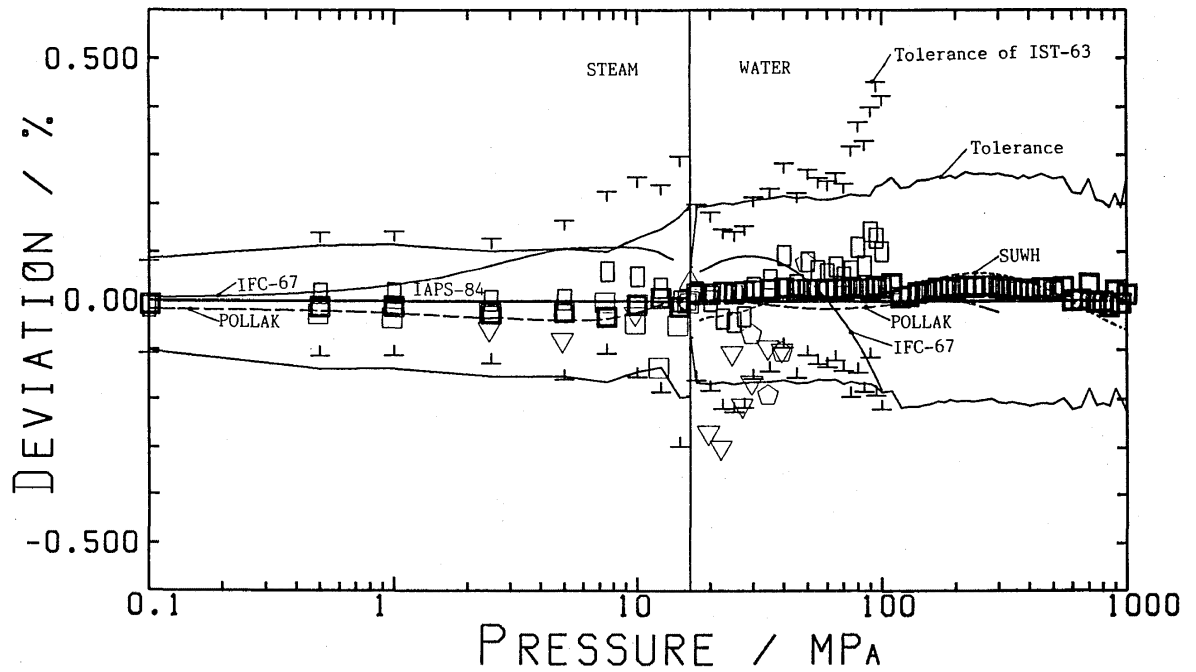


FIG. A.III.12a. Enthalpy deviation from IAPS-84 at 623.15 K against logarithmic pressure scale.

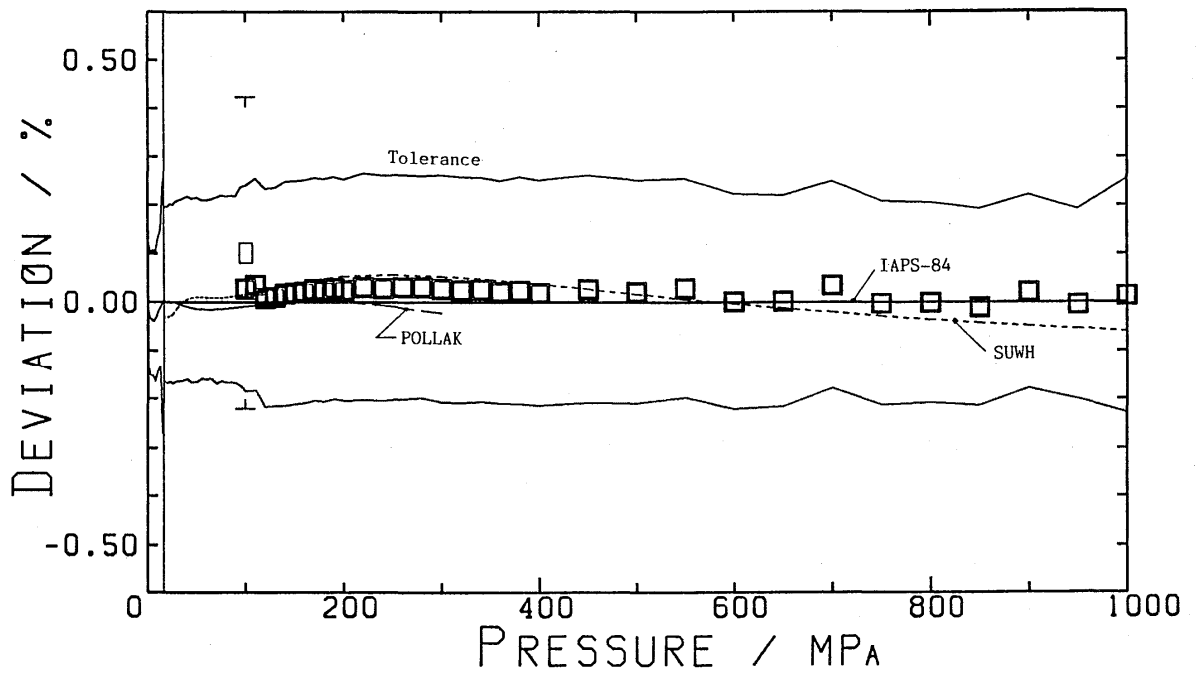


FIG. A.III.12b. Enthalpy deviation from IAPS-84 at 623.15 K against pressure.

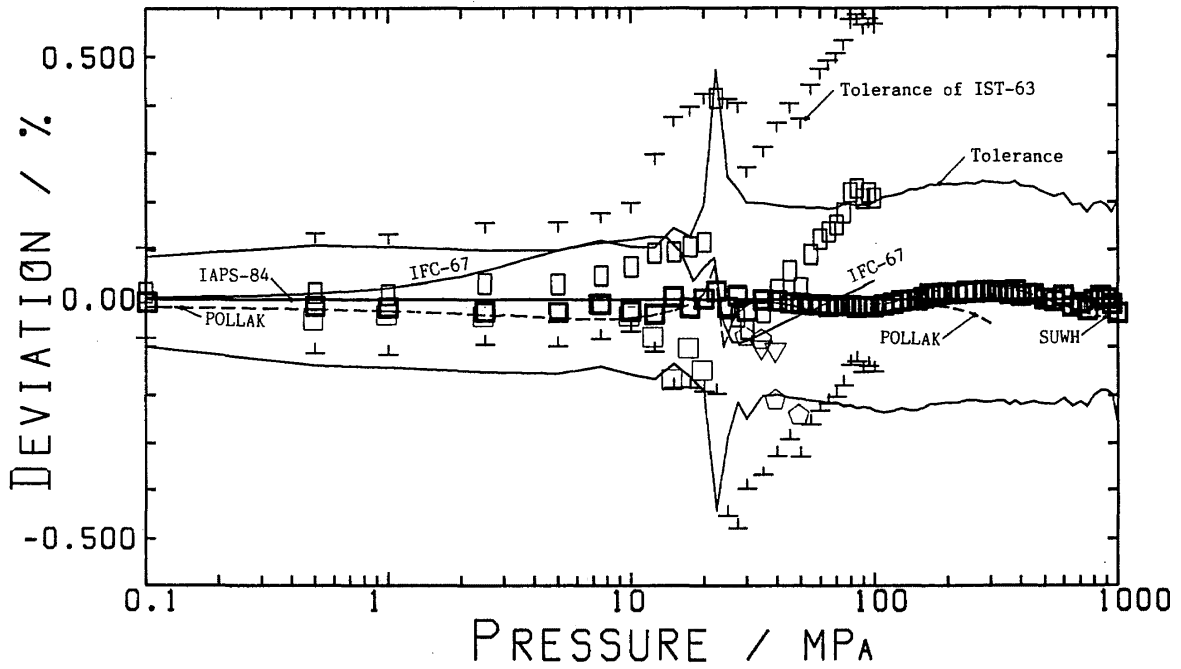


FIG. A.III.13a. Enthalpy deviation from IAPS-84 at 648.15 K against logarithmic pressure scale.

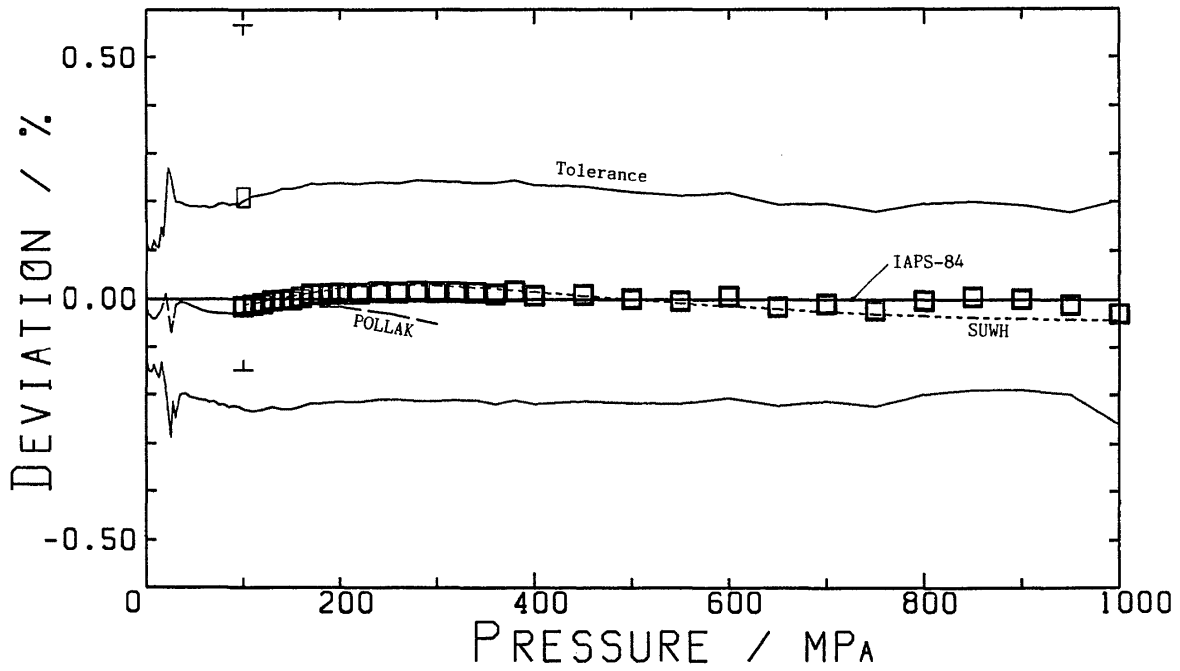


FIG. A.III.13b. Enthalpy deviation from IAPS-84 at 648.15 K against pressure.

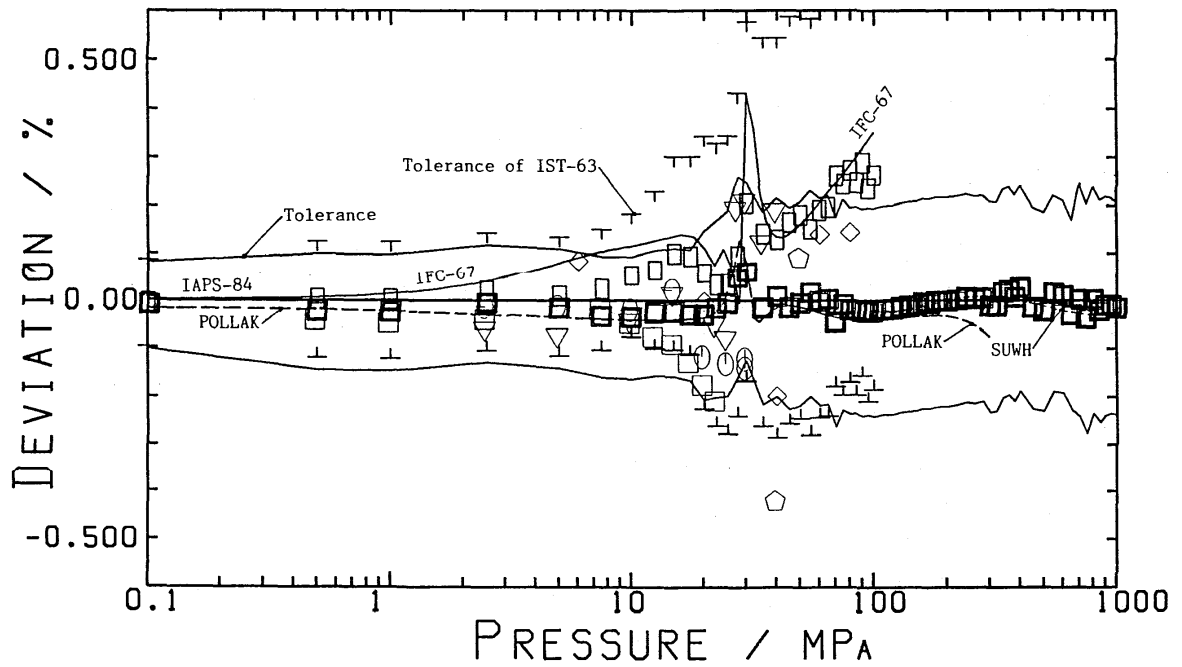


FIG. A.III.14a. Enthalpy deviation from IAPS-84 at 673.15 K against logarithmic pressure scale.

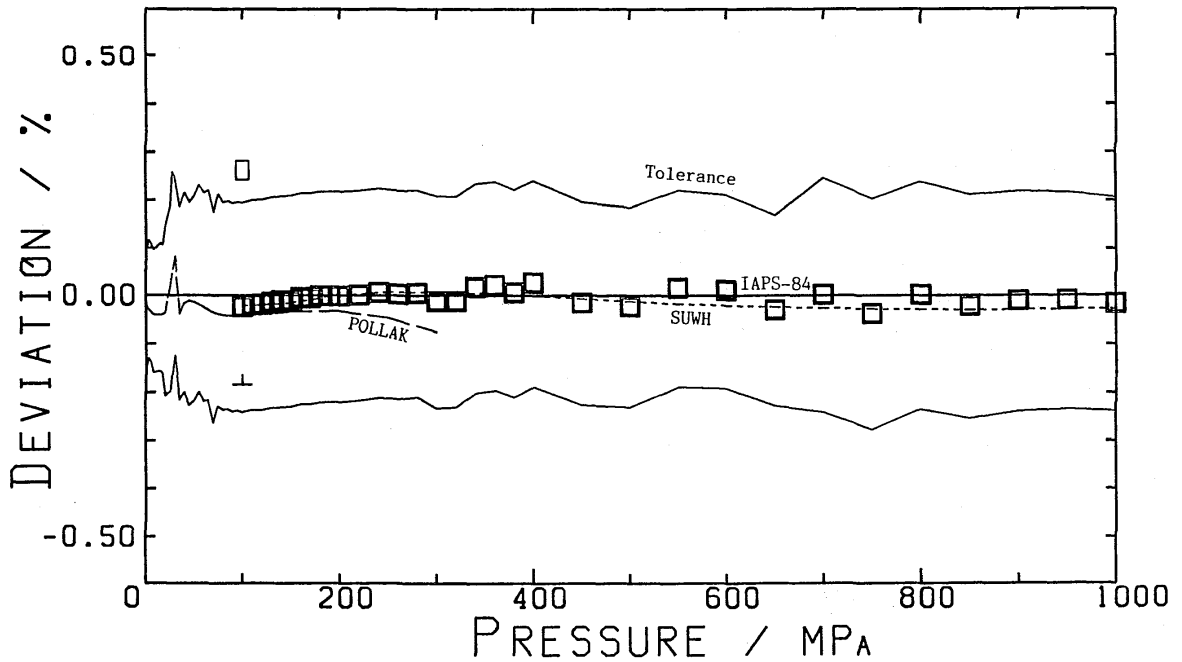


FIG. A.III.14b. Enthalpy deviation from IAPS-84 at 673.15 K against pressure.

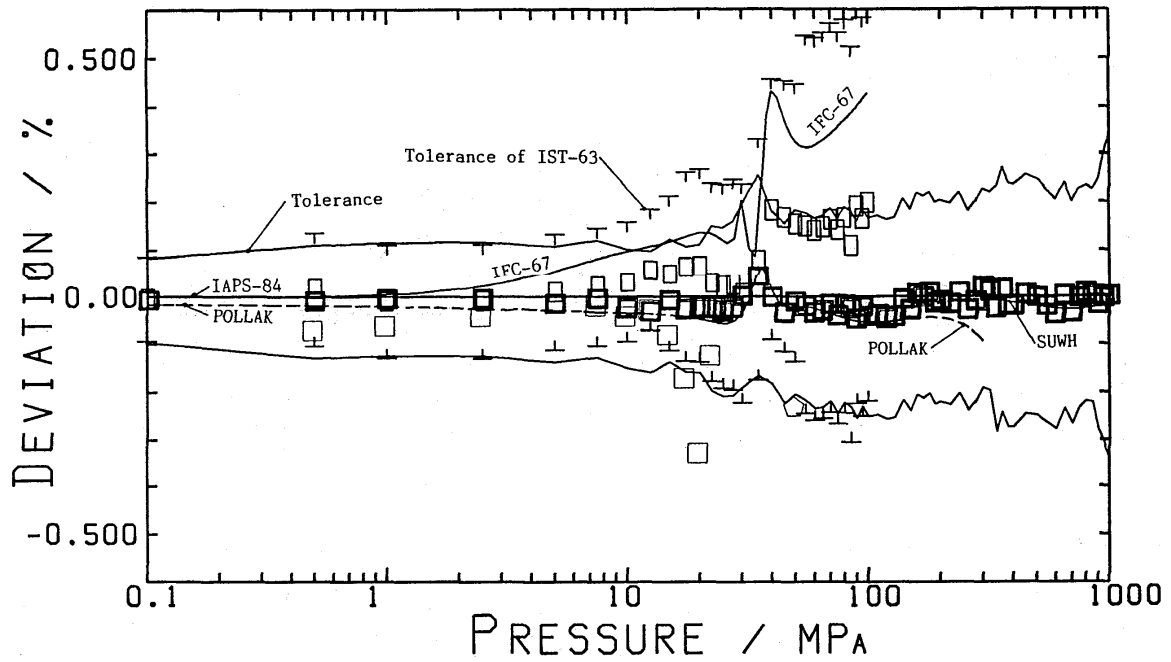


FIG. A.III.15a. Enthalpy deviation from IAPS-84 at 698.15 K against logarithmic pressure scale.

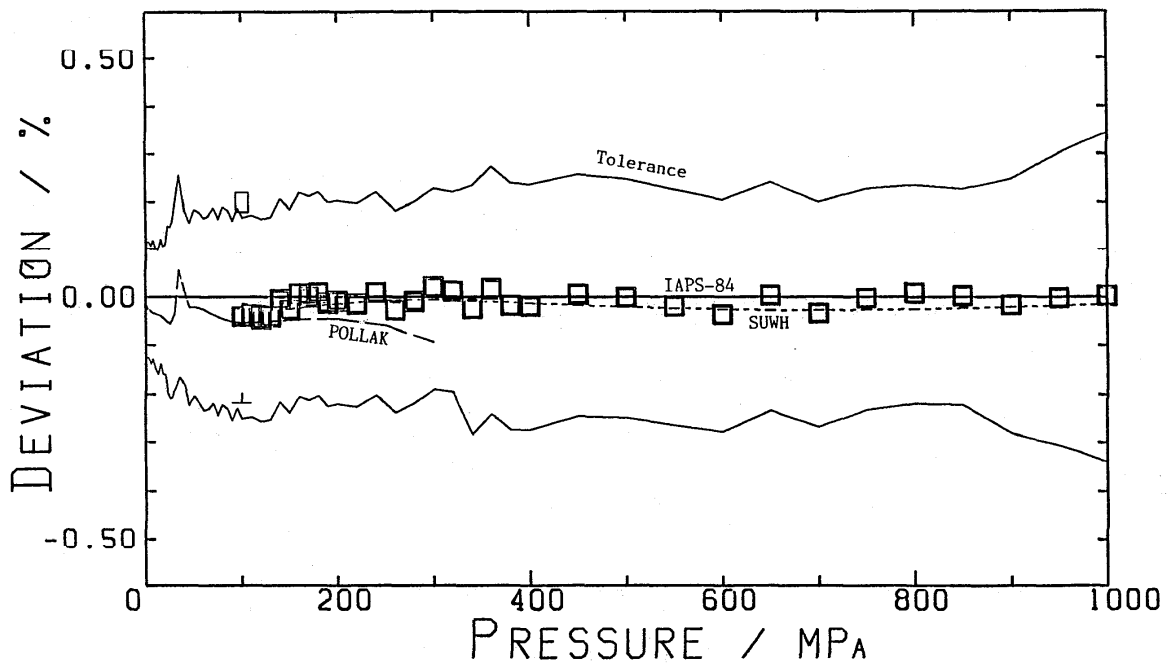


FIG. A.III.15b. Enthalpy deviation from IAPS-84 at 698.15 K against pressure.

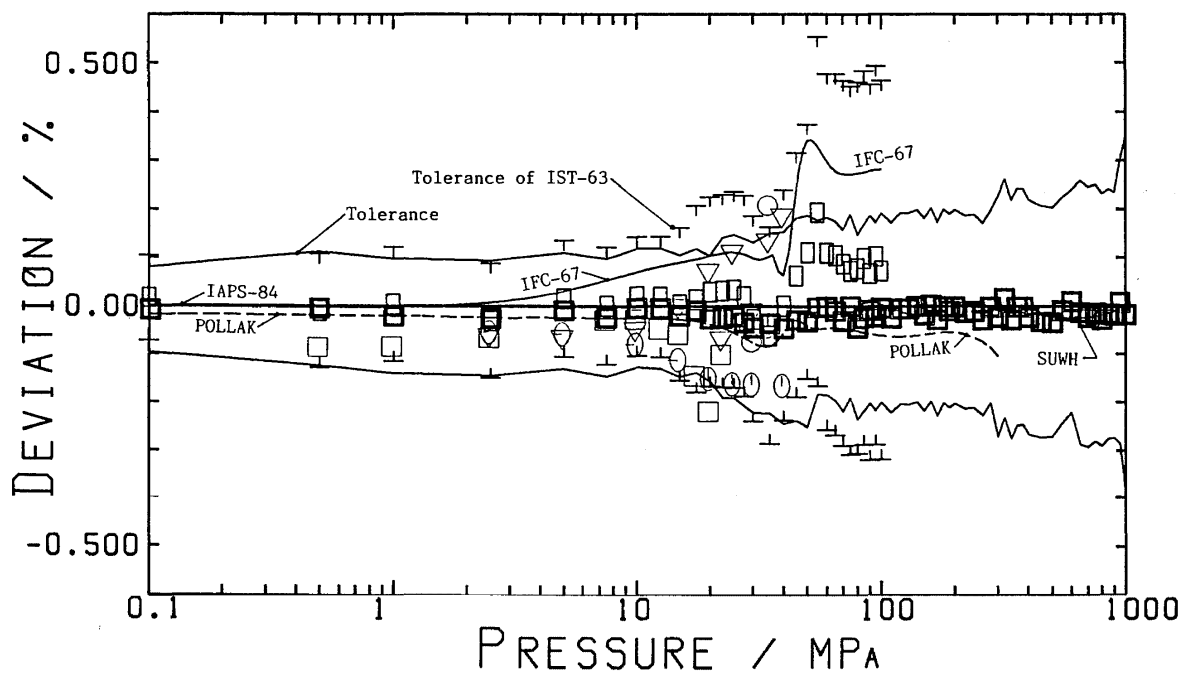


FIG. A.III.16a. Enthalpy deviation from IAPS-84 at 723.15 K against logarithmic pressure scale.

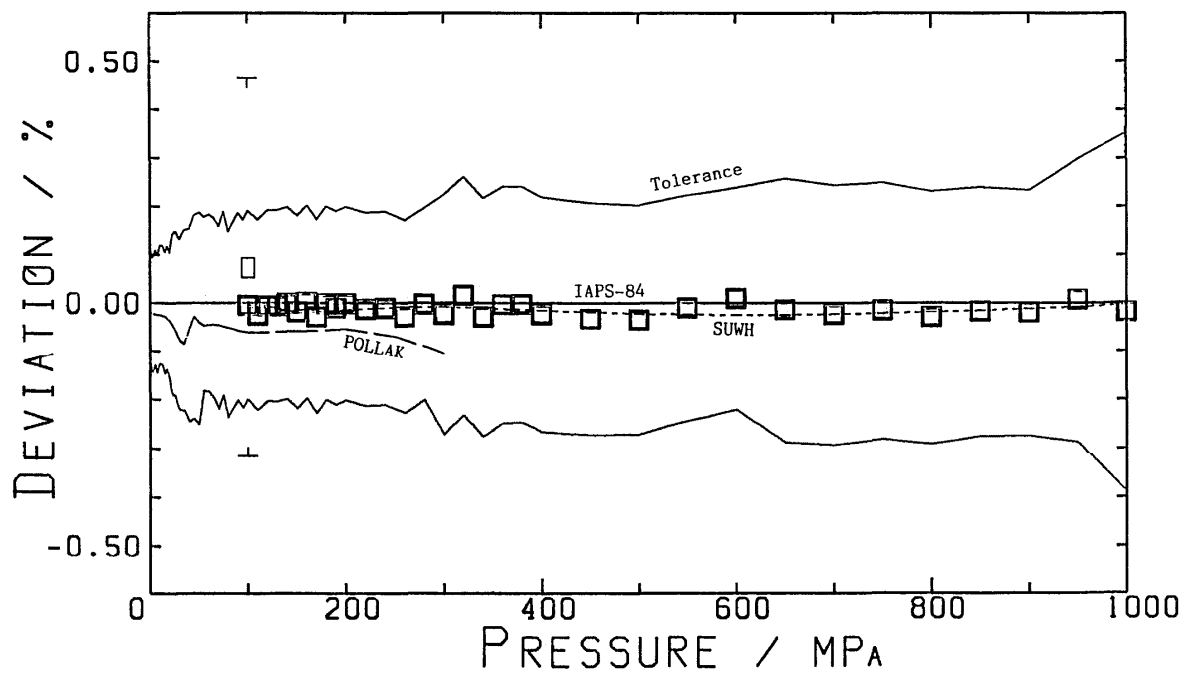


FIG. A.III.16b. Enthalpy deviation from IAPS-84 at 723.15 K against pressure.

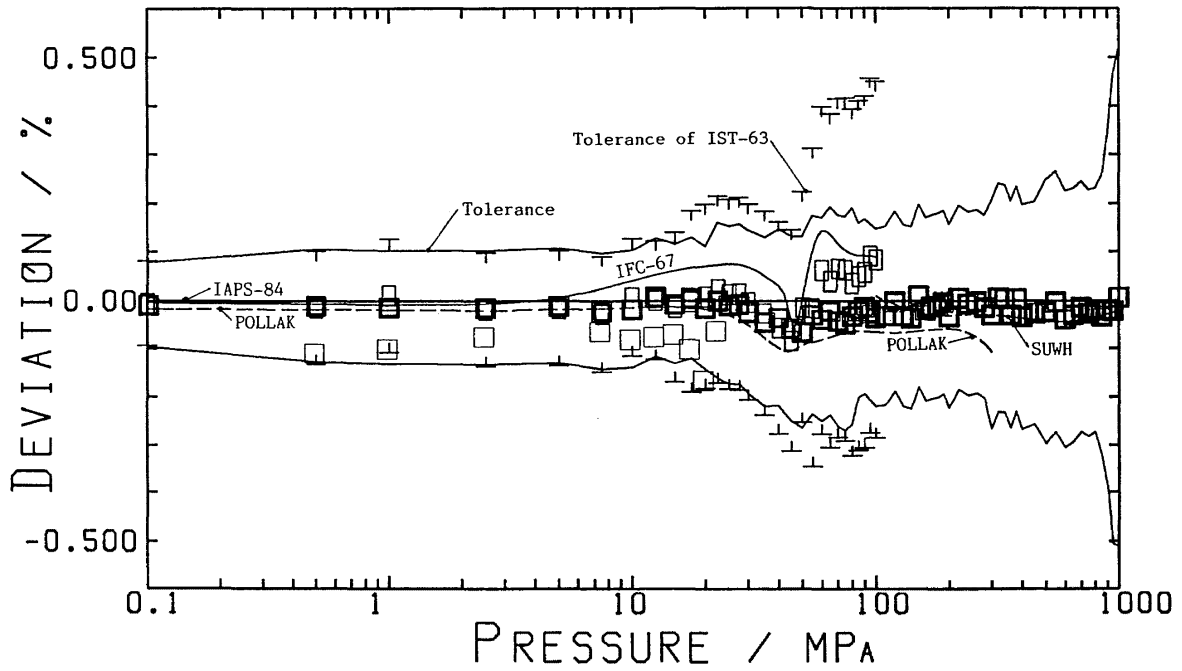


FIG. A.III.17a. Enthalpy deviation from IAPS-84 at 748.15 K against logarithmic pressure scale.

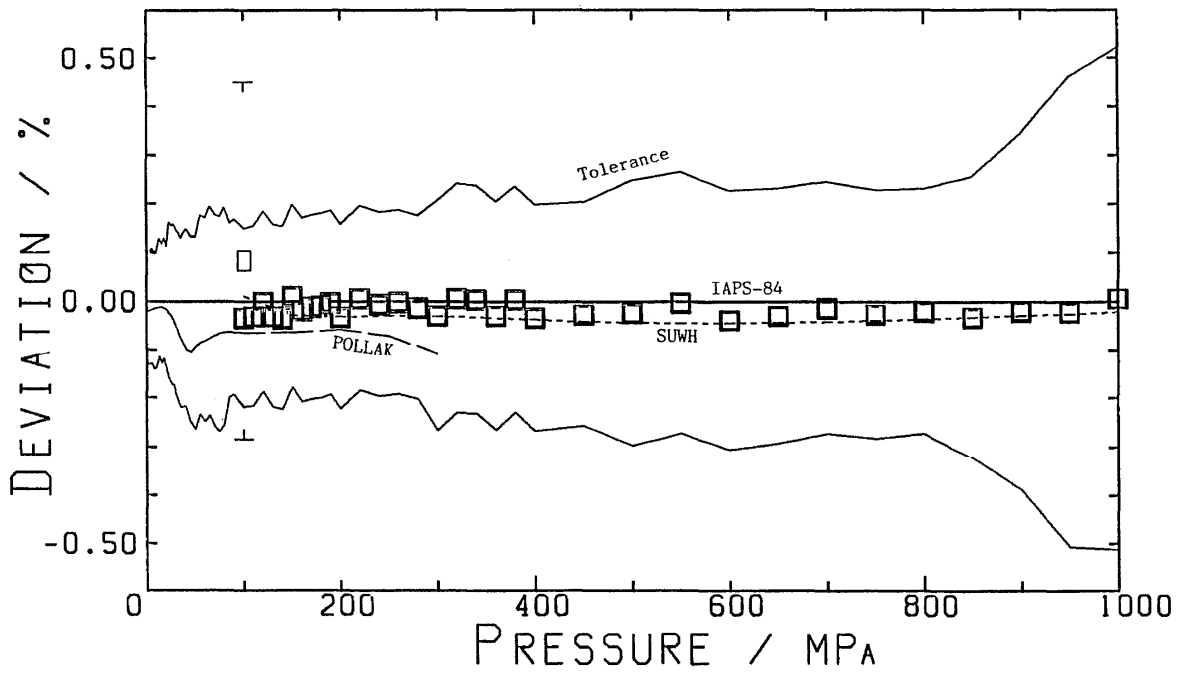


FIG. A.III.17b. Enthalpy deviation from IAPS-84 at 748.15 K against pressure.



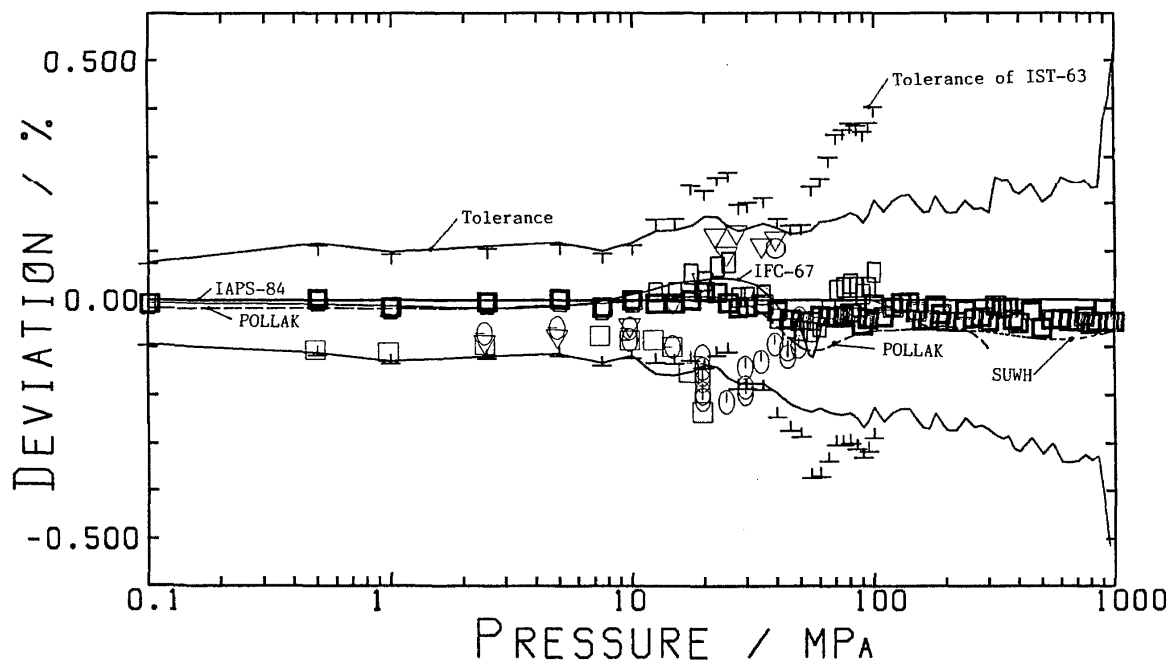


FIG. A.III.18a. Enthalpy deviation from IAPS-84 at 773.15 K against logarithmic pressure scale.

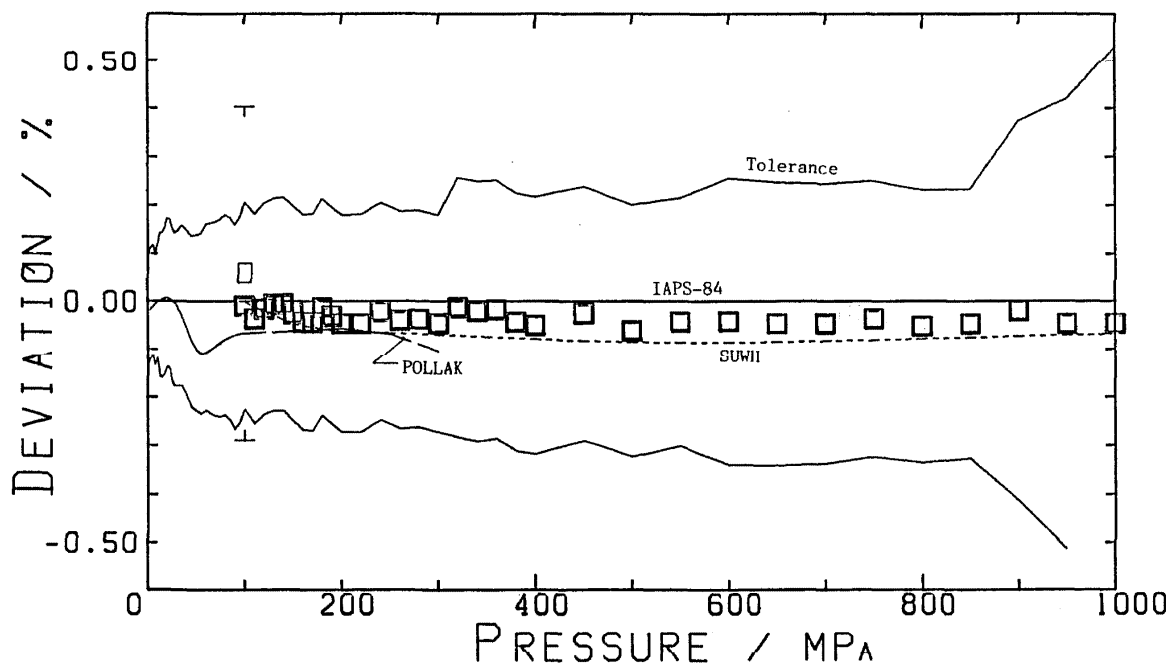


FIG. A.III.18b. Enthalpy deviation from IAPS-84 at 773.15 K against pressure.

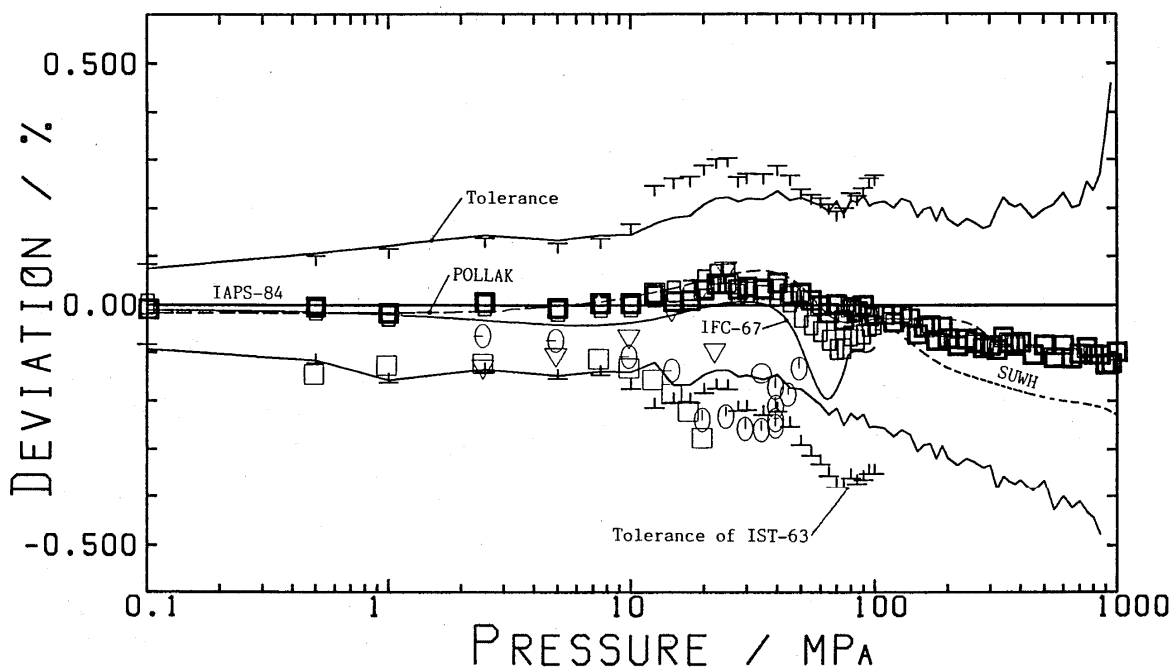


FIG. A.III.19a. Enthalpy deviation from IAPS-84 at 823.15 K against logarithmic pressure scale.

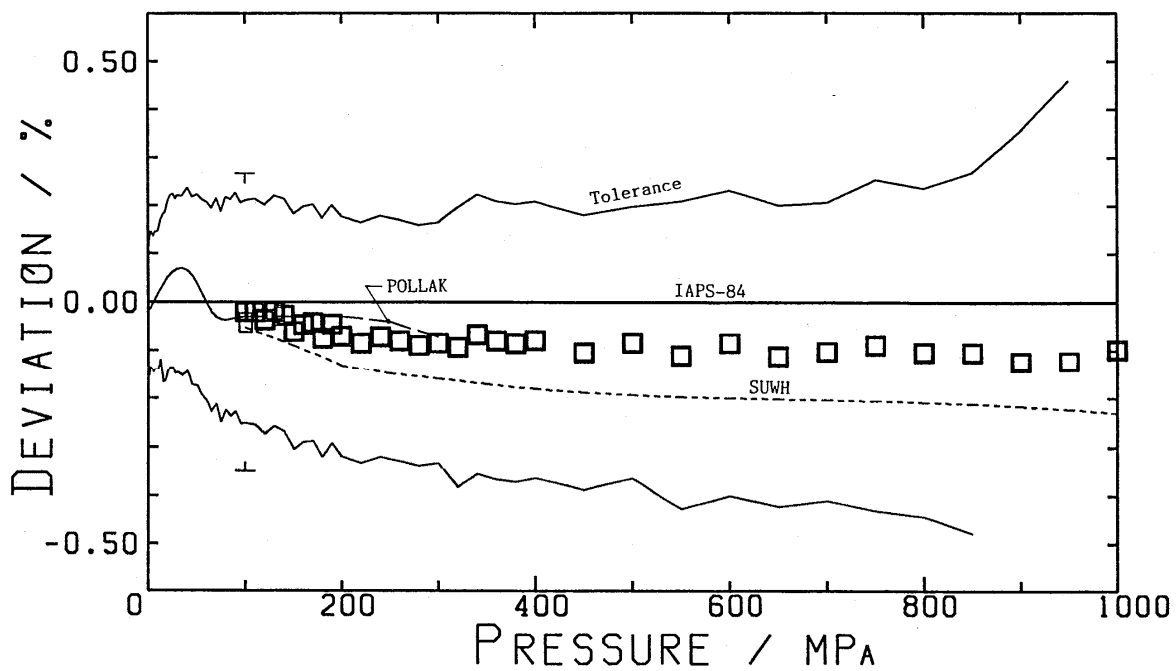


FIG. A.III.19b. Enthalpy deviation from IAPS-84 at 823.15 K against pressure.

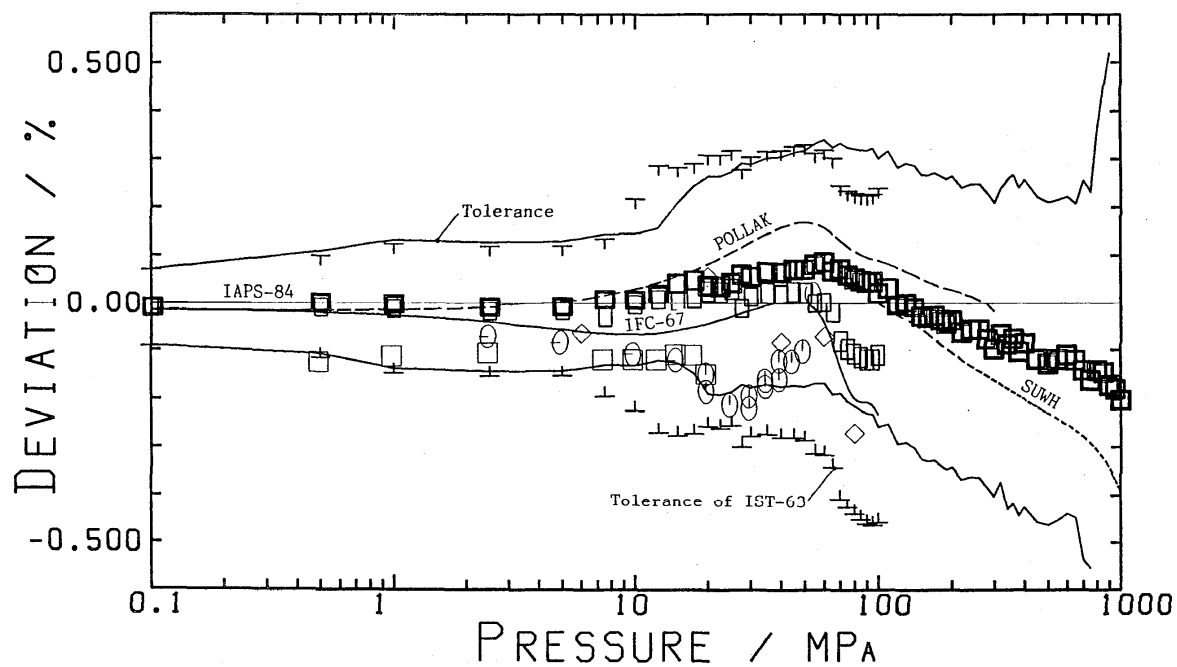


FIG. A.III.20a. Enthalpy deviation from IAPS-84 at 873.15 K against logarithmic pressure scale.

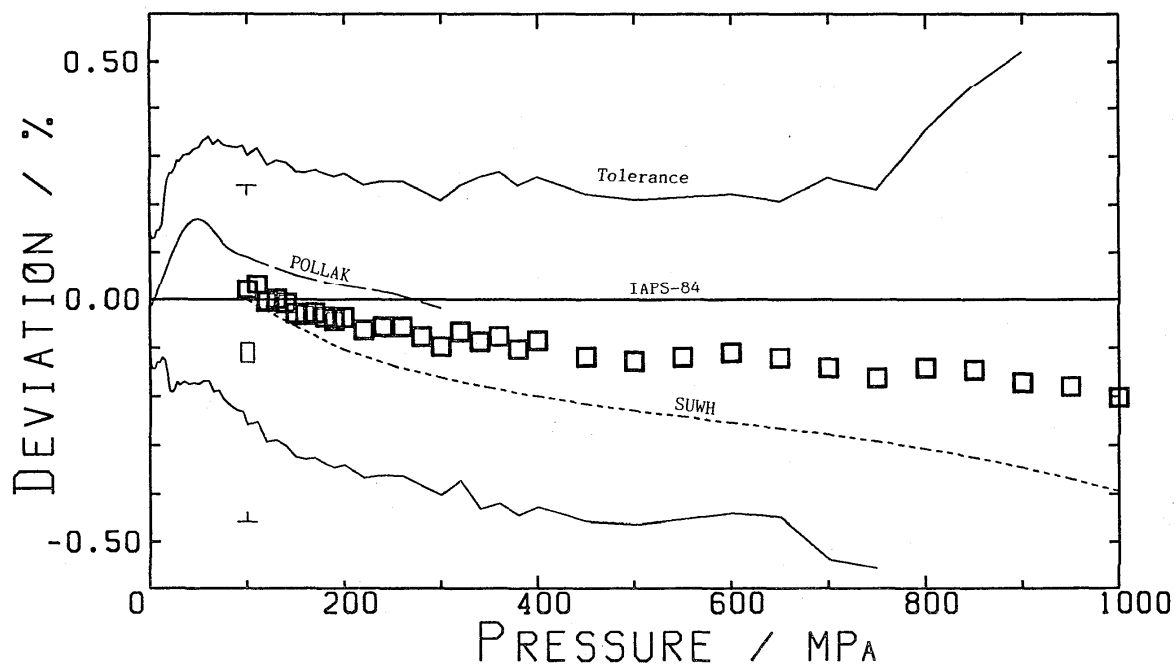


FIG. A.III.20b. Enthalpy deviation from IAPS-84 at 873.15 K against pressure.

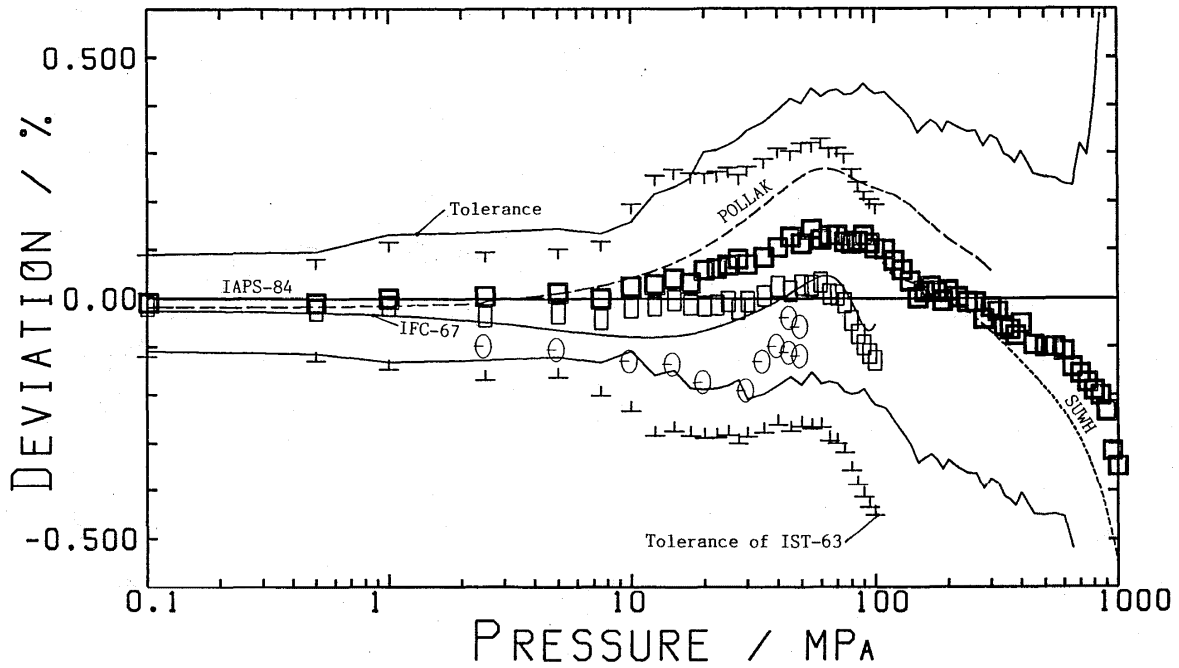


FIG. A.III.21a. Enthalpy deviation from IAPS-84 at 923.15 K against logarithmic pressure scale.

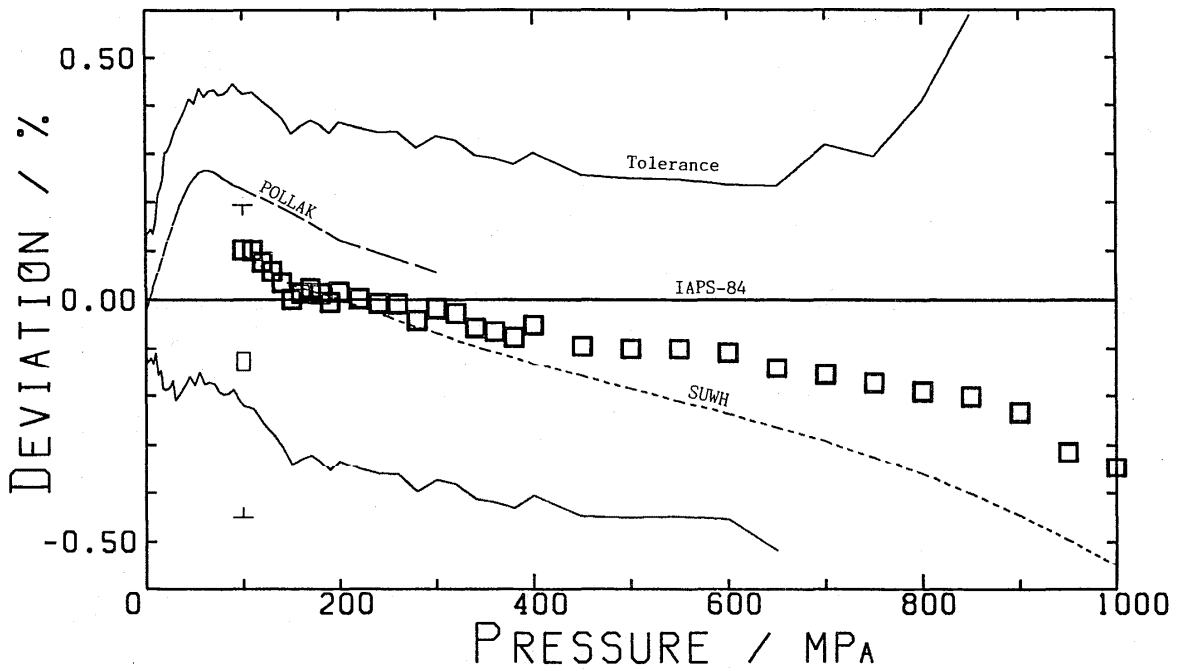


FIG. A.III.21b. Enthalpy deviation from IAPS-84 at 923.15 K against pressure.

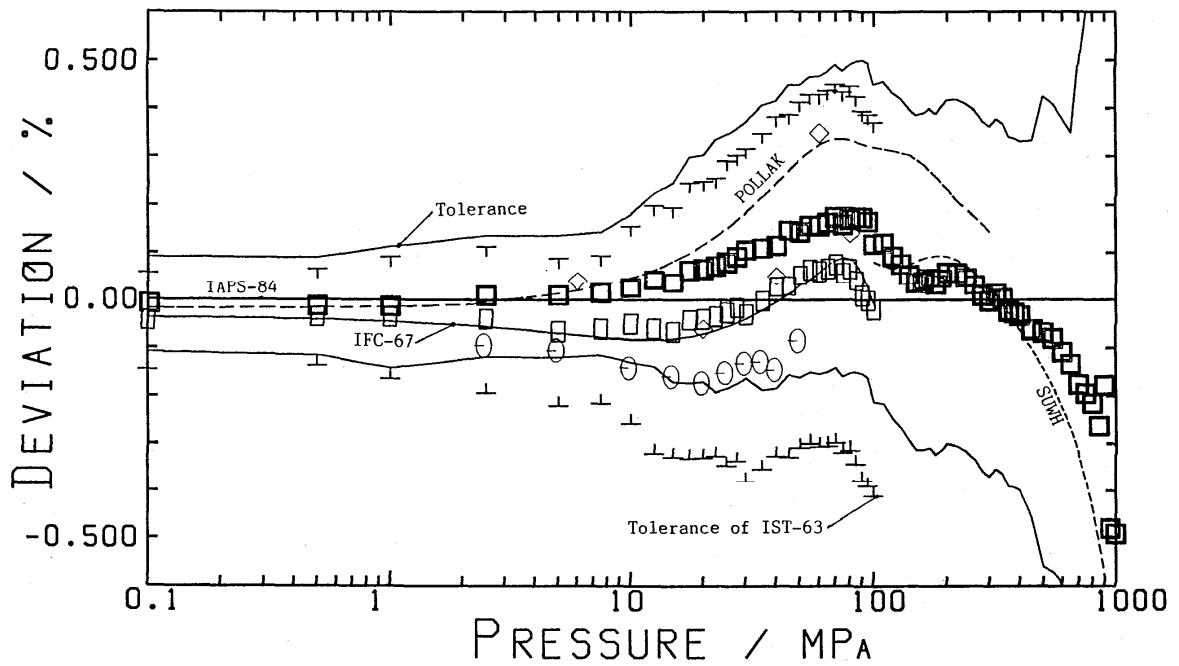


FIG. A.III.22a. Enthalpy deviation from IAPS-84 at 973.15 K against logarithmic pressure scale.

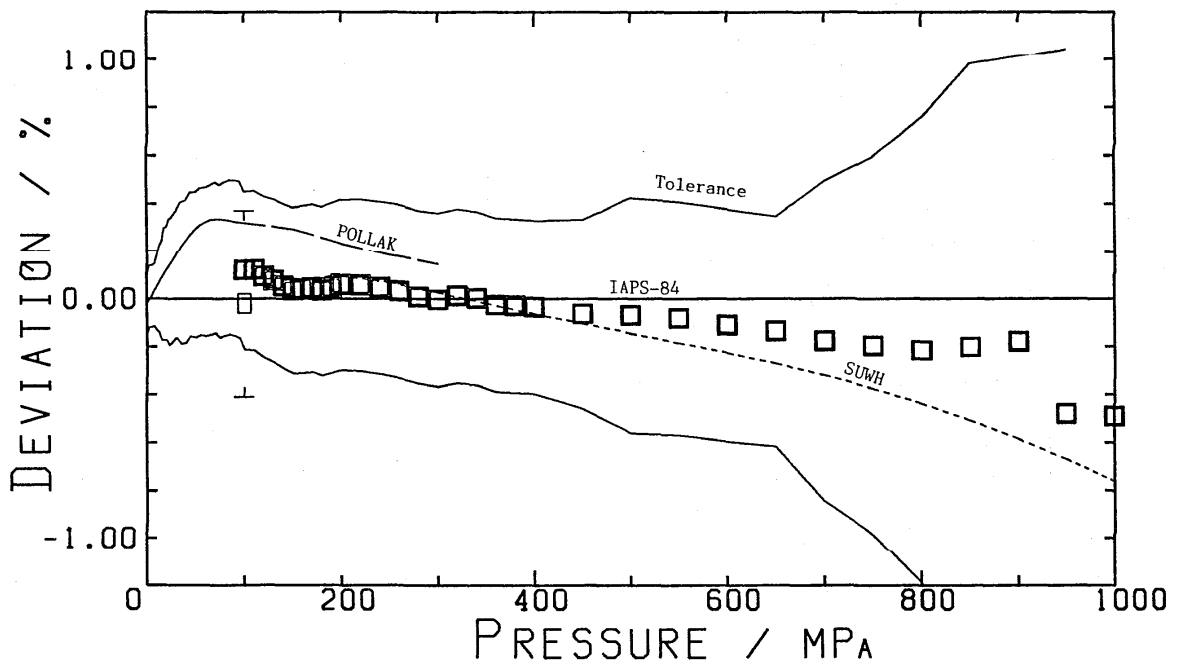


FIG. A.III.22b. Enthalpy deviation from IAPS-84 at 973.15 K against pressure.

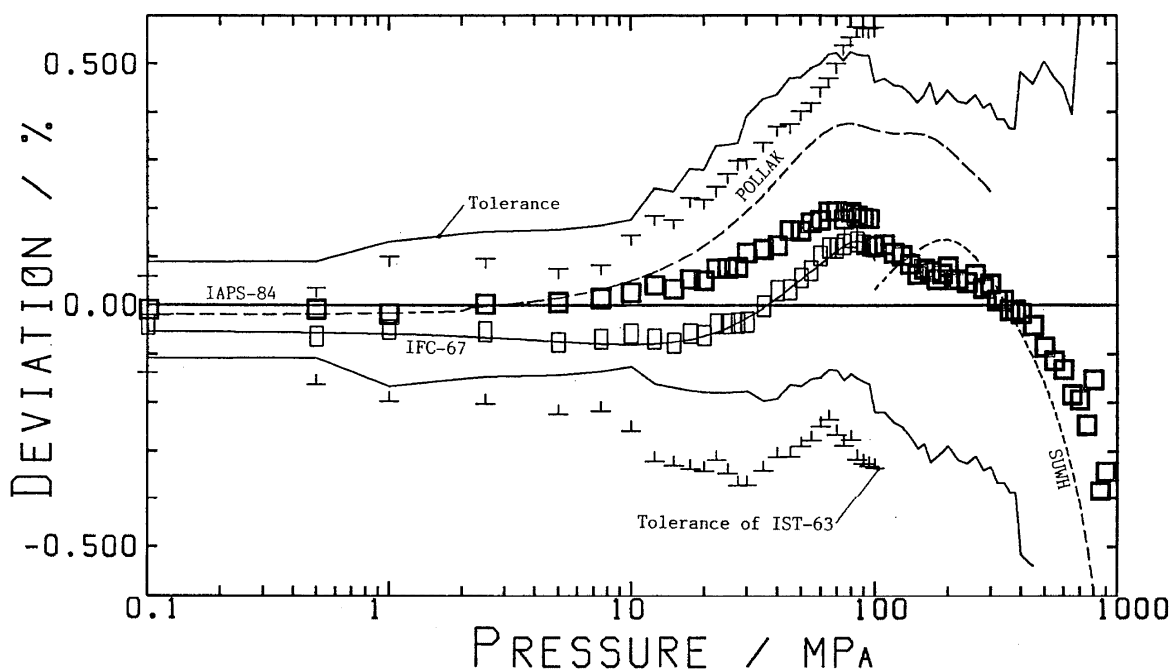


FIG. A.III.23a. Enthalpy deviation from IAPS-84 at 1023.15 K against logarithmic pressure scale.

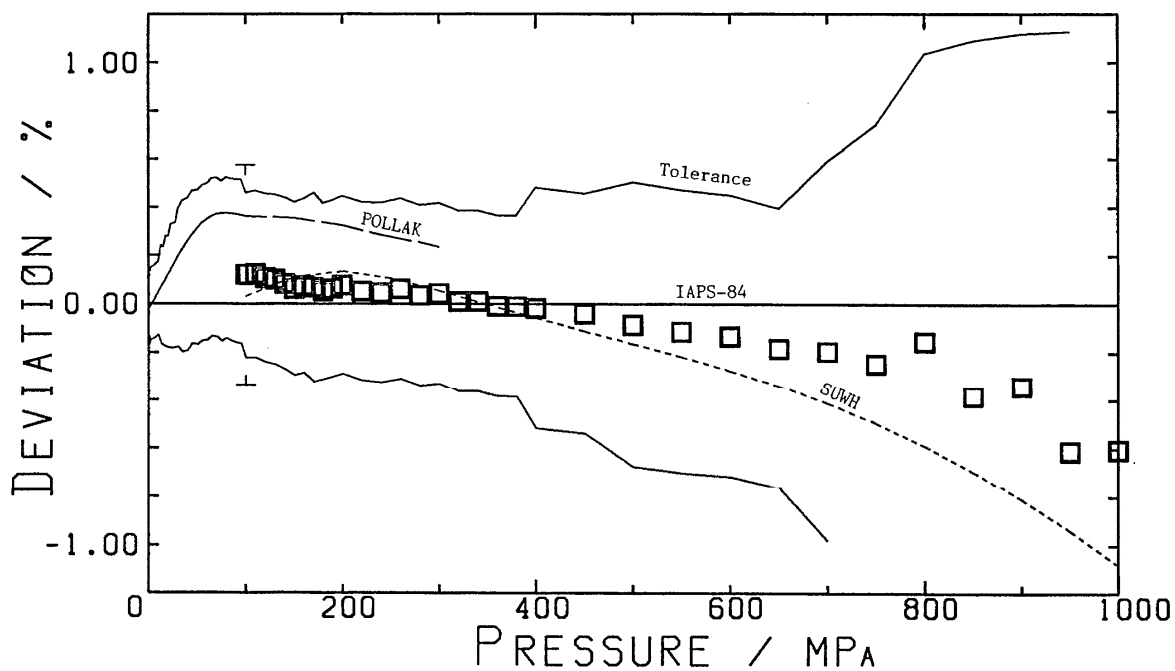


FIG. A.III.23b. Enthalpy deviation from IAPS-84 at 1023.15 K against pressure.

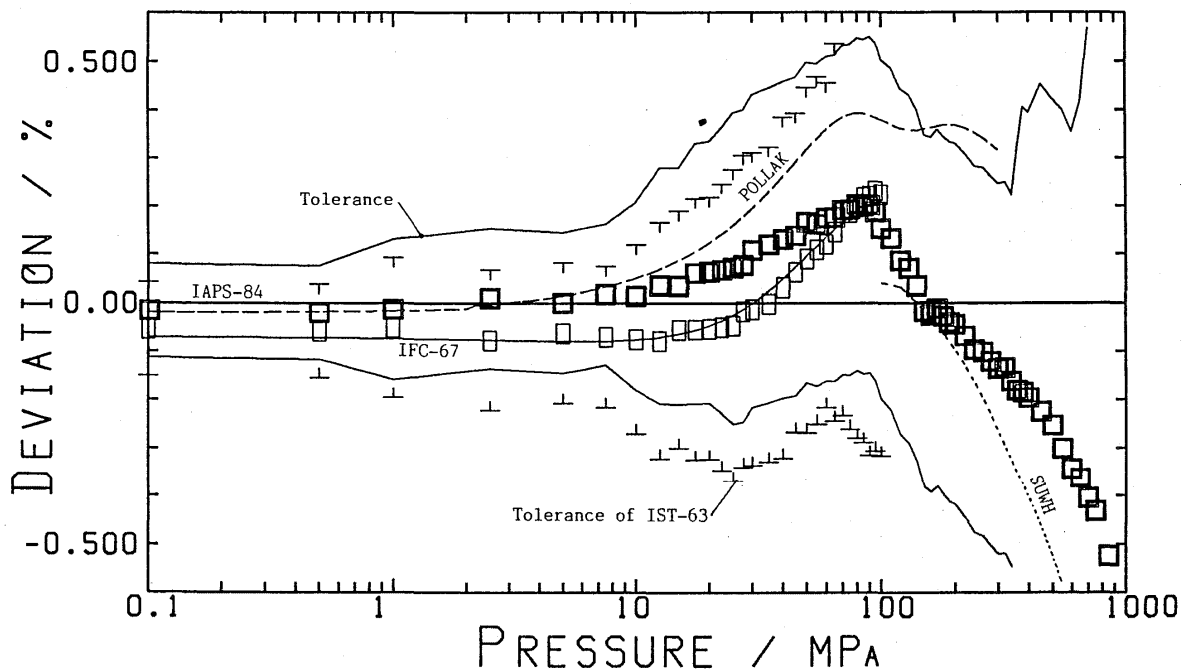


FIG. A.III.24a. Enthalpy deviation from IAPS-84 at 1073.15 K against logarithmic pressure scale.

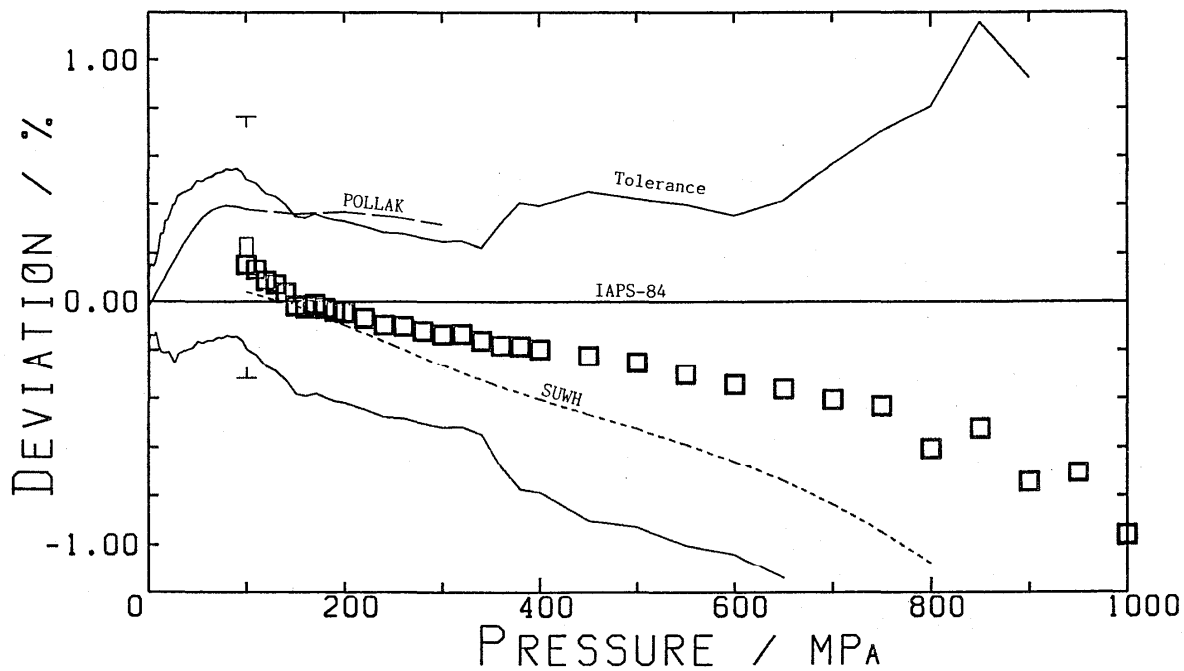


FIG. A.III.24b. Enthalpy deviation from IAPS-84 at 1073.15 K against pressure.