Coupled Phase Diagram-Thermodynamic Analysis of the 24 Binary Systems, A₂CO₃-AX and A₂SO₄-AX Where A=Li, Na, K and X=Cl, F, NO₃, OH

Cite as: Journal of Physical and Chemical Reference Data 19, 1149 (1990); https://doi.org/10.1063/1.555866 Submitted: 05 May 1989 . Published Online: 15 October 2009

Yves Dessureault, James Sangster, and Arthur D. Pelton





ARTICLES YOU MAY BE INTERESTED IN

Phase Diagrams and Thermodynamic Properties of the 70 Binary Alkali Halide Systems Having Common Ions

Journal of Physical and Chemical Reference Data 16, 509 (1987); https://doi.org/10.1063/1.555803

Conformal Ionic Mixtures

The Journal of Chemical Physics 39, 2610 (1963); https://doi.org/10.1063/1.1734071

Enthalpies of Mixing in Some Binary Liquid Halide Mixtures

The Journal of Chemical Physics 42, 1309 (1965); https://doi.org/10.1063/1.1696115





Coupled Phase Diagram-Thermodynamic Analysis of the 24 Binary Systems, A_2CO_3 -AX and A_2SO_4 -AX Where A = Li, Na, K and X = Cl, F, NO_3 , OH

Yves Dessureault, James Sangster^a, and Arthur D. Pelton

Centre De Recherche en Calcul Thermochimique, Ecole Polytechnique, P.O. Box 6079, Station A, Montreal, Quebec, Canada, H3C 3A7

Received May 5, 1989; Revised manuscript received March 12, 1990

A complete bibliographic search for all thermodynamic and phase diagram data on the 24 binary systems A_2CO_3 -AX and A_2SO_4 -AX (where A = Li, Na, K and X = F, Cl, OH, NO₃) was carried out. A computer-assisted simultaneous evaluation of all data was performed in order to obtain optimized equations for the thermodynamic properties of the phases. A re-evaluation of the thermodynamic data for several of the pure salts was also carried out. The optimized thermodynamic parameters are reported as well as the phase diagrams calculated from these equations. These are considered to be the best evaluated phase diagrams which can be deduced from the data currently available. Estimated error limits of all binary assessments are given.

Key words: carbonates; halides; hydroxides; molten salts; nitrates; phase diagrams; sulfates; thermodynamic assessments.

Contents

1. 2.	Introduction	1150		E) Systems AOH-A ₂ SO ₄ where A = Li, Na, K	1157
۷.	Diagram Analysis	1150		F) Systems A ₂ CO ₃ -ANO ₃ and ANO ₃ -A ₂ SO ₄	
	2.1 Introduction	1150		where $A = Li$, Na, K	
	2.2 Thermodynamic Relationships	1151	4.	Appendix	
	2.3 Limiting Slopes of Liquidus Lines: Esti-	1151	5.	Acknowledgements	
	mation of Solid Solubility	1151	6.	References	
	2.4 Intermediate Compounds	1152	U.	References	11/0
	2.5 Properties of the Pure Components			List of Tables	
	2.6 Optimization Procedure	1152			
	2.7 Presentation of Results	1152	1.	Thermodynamic properties of the pure salts.	1153
3.	The Evaluations.	1152	2.		
•	A) Systems A_2 CO ₃ -AF where $A = Li$, Na,			2a. Summary of reported data	
	K	1152		2b. Summary of evaluated diagram	
	B) Systems AF- A_2 SO ₄ where A = Li, Na,		3.	-	
	K	1153		3a. Summary of reported data	1155
	C) Systems ACl-A ₂ CO ₃ and ACl-A ₂ SO ₄			3b. Summary of evaluated diagram	1155
	where $A = Li$, Na , $K \dots \dots$	1154	4.		
	D) Systems A_2CO_3 -AOH where $A = Li$,			= Li, Na, K	
	Na, K	1155		4a. Summary of reported data	1157
				4b. Summary of evaluated diagram	1157
			5.	Systems A_2CO_3 -AOH where $A = Li$, Na, K.	1157
				5a. Summary of reported data	1157
Pe	rmanent address: Sangster Research Laboratories, Suite 40:	2, 3475		5b. Summary of evaluated diagram	1157
de	la Montagne, Montreal, Quebec, Canada H3G 2A4.		6.	Systems AOH- A_2SO_4 where $A = Li$, Na, K.	1158
٠.	one in the state of the	Y T		6a. Summary of reported data	1158
\sim	990 by the U.S. Secretary of Commerce on behalf of the ates. This copyright is assigned to the American Institute of I			6b. Summary of evaluated diagram	1158
-	d the American Chemical Society.	, 0100	7.	Systems A ₂ CO ₃ -ANO ₃ and ANO ₃ -A ₂ SO ₄	
	prints available from ACS; see Reprints I ist at back of issu	ie.		where A = Li. Na. K	1159

	7a. Summary of reported data	1159
	7b. Summary of evaluated diagram	1159
8.	Optimized excess properties of the liquid	
	phase	1160
9.	Gibbs energies of fusion and of formation of	
	intermediate solid compounds	1160
	<u>-</u>	

List of Figures

1.	The system Li ₂ CO ₃ -LiF	1161
2.	The system Na ₂ CO ₃ -NaF	1161
3.	The System K ₂ CO ₃ -KF	1162
4.	The system LiF-Li ₂ SO ₄	1162
5.	The system NaF-Na ₂ SO ₄	1163
	The system KF-K ₂ SO ₄	1163
7.	The system LiCl-Li ₂ CO ₃	1164
8.	The system NaCl-Na ₂ CO ₃	1164
9.	The system KCl-K ₂ CO ₃	1165
	The system LiCl-Li ₂ SO ₄	1165
11.	The system NaCl-Na ₂ SO ₄	1166
12.	The system KCl-K ₂ SO ₄	1166
13.	The system Li ₂ CO ₃ -LiOH	1167
14.	The system Na ₂ CO ₃ -NaOH	1167
15.	The system Ha ₂ CO ₃ -NaOH enlarged	1168
16.	The system K_2CO_3 - KOH	1168
17.	The system K ₂ CO ₃ -KOH enlarged	1169
18.	The system LiOH-Li ₂ SO ₄	1169
19.	The system NaOH-Na ₂ SO ₄	1170
20.	The system NaOH-Na ₂ SO ₄ enlarged	1170
21.	The system KOH-K ₂ SO ₄	1171
22.	The system KOH-K ₂ SO ₄ enlarged	1171
23.	The system Li ₂ CO ₃ -LiNO ₃	1172
24.	The system Na ₂ CO ₃ -NaNO ₃	1172
25.	The system K ₂ CO ₃ -KNO ₃	1173
26.	The system LiNO ₃ -Li ₂ SO ₄	1173
27.	The system NaNO ₃ -Na ₂ SO ₄	1174
28.	The system NaNO ₃ -Na ₂ SO ₄ enlarged	1174
29.	The system KNO_3 - K_2SO_4	1175

1. Introduction

Molten salt systems involving alkali carbonates and sulfates are of importance in hot corrosion, in electrochemical cells such as the molten carbonate fuel cell, and in many chemical and metallurgical applications.

The present article reports coupled critical evaluations of phase diagram and thermodynamic data for several binary common-cation systems involving the cations Li⁺, Na⁺, K⁺ and the anions Cl⁻, CO₃²⁻, F⁻, NO₃, OH⁻, SO₄²⁻. It forms part of a continuing program of critical evaluation of molten salt phase diagram and thermodynamic property data. A analysis of such data for the 70 binary common-ion alkali halide systems was reported previously¹ in this journal.

An extensive literature survey of all available phase diagram and thermodynamic data, some of which are

summarized in compendia²⁻⁵, was carried out. We believe that the bibliographic searches are as complete as possible.

In the critical evaluation technique, all available phase diagram and thermodynamic data for a system are simultaneously optimized in order to obtain a set of equations describing the thermodynamic properties of the phases as functions of temperature and composition. These equations for the thermodynamic properties of all known phases are consistent with the measured thermodynamic properties and phase diagrams as well as with established thermodynamic principles and theories of solution behavior. The phase diagram can subsequently be calculated by computer from the thermodynamic equations.

Hence, all the thermodynamic properties as well as the phase diagram can usually be represented and stored by means of a small set of coefficients. Furthermore, the self-consistent analytical representation permits the data to be interpolated and extrapolated. The procedure greatly reduces the amount of data needed to characterize fully a binary system.

With such a technique, the evaluator can therefore test the thermodynamic consistency within and among all reported phase diagram and excess property measurements. Discrepancies among various sets of data can often be resolved in this way, and error limits can more easily be assigned. Unknown or uncertain phase boundaries can often be estimated with good precision and, conversely, some reported phase boundaries can be rejected as being inconsistent with the thermodynamic properties of the system. This results in a much more rigorous and objective assessment of all data than has hitherto been possible.

Of particular importance is the fact that it is often possible to estimate the thermodynamic properties and phase diagrams of ternary and higher-order systems from the assessed parameters for their binary sub-systems. To this end, semi-empirical techniques have been developed based, for example, upon extensions of regular solution theory. The present analysis of the binary systems is thus the first, and most important, step in the development of databases for multicomponent systems.

2. Computer-Coupled Thermodynamic/ Phase Diagram Analysis

2.1. Introduction

A short bibliography on computer-coupled thermodynamic/phase diagram analysis and calculation⁶⁻¹³ should suffice to orient the reader. The principles of simultaneous least-squares optimization of thermodynamic and phase diagram data are described in Ref. 6. The interactive computer programs which were used in the optimizations and phase diagram calculations are described in Ref. 7. These programs are available "on-line" or on diskette, and further information may be obtained from the authors.

2.2. Thermodynamic Relationships

The reader should refer to the previous work¹ for a complete discussion of the thermodynamic relationships used in a critical evaluation. A resume is given here.

For equilibrium between a solid and a liquid phase in a binary system with components A and B, we may write:

$$RT \ln a_A^{\ell} - RT \ln a_A^{s} = -\Delta_{\text{fus}} G_A^{\circ} \tag{1}$$

where a_A^{\prime} and a_A^{\prime} are the activities of A on the liquidus (with respect to the liquid standard state) and on the solidus (with respect to the solid standard state) at temperature T. $\Delta_{fus}G_A^{\prime}$ is the Gibbs energy of fusion of A at T and R is the gas constant. A similar equation may be written for component B or for any intermediate compound A_x B_y .

The activity of a component A in a phase a may be written as:

$$a^{\alpha}_{\lambda} = \gamma^{\alpha}_{\lambda} X^{\alpha}_{\lambda} \tag{2}$$

where X_A^{α} is the molar fraction of component A in the phase α and γ_A^{α} is the activity coefficient given by:

$$RT \ln \gamma_{\rm A}^{\alpha} = G_{\rm A}^{\rm E(\alpha)} = G^{\rm E(\alpha)} + x_{\rm B} \frac{\partial G^{\rm E(\alpha)}}{\partial X_{\rm A}}$$
 (3)

where $G_A^{E(\alpha)}$ is the partial molar excess Gibbs energy of A in α .

For the liquid phase the enthalpy of mixing (H^E) and excess entropy (S^E) may be expanded as polynomials in the equivalent fractions as follows:

$$G^{\mathrm{E}} = H^{\mathrm{E}} - TS^{\mathrm{E}} = X_{\mathrm{A}}G_{\mathrm{A}}^{\mathrm{E}} + X_{\mathrm{B}}G_{\mathrm{B}}^{\mathrm{E}} \tag{4}$$

$$H^{E} = (q_{A}X_{A} + q_{B}X_{B})Y_{A}Y_{B}[h_{0} + h_{1}(Y_{B} - Y_{A}) + \dots + h_{n}(Y_{B} - Y_{A})^{n}]$$
(5)

$$S^{E} = (q_{A}X_{A} + q_{B}X_{B})Y_{A}Y_{B}[s_{0} + s_{1}(Y_{B} - Y_{A}) + \dots$$

$$s_{n}(Y_{B} - Y_{A})^{n}]$$
 (6)

where the h_i and s_i are empirical coefficients. The factors q_A and q_B are the number of equivalents per mol of component. For example, $q_{\rm NaCl}=1$, $q_{\rm k_2}s_{\rm 04}=2$. $Y_{\rm A}$ and $Y_{\rm B}$ are the equivalent fractions defined as:

$$Y_{\rm A} = \frac{q_{\rm A} X_{\rm A}}{q_{\rm A} X_{\rm A} + q_{\rm B} X_{\rm B}} = (1 - Y_{\rm B})$$
 (7)

The factor $(q_A X_A + q_B X_B)$ in Eqs. (5, 6) is the number of equivalents per mol of solution.

Although H^{E} and S^{E} could also be expressed as polynomials in the mol fractions, X_{A} and X_{B} , experience has

shown that expansions in terms of the equivalent fractions generally give somewhat better representations with fewer coefficients.

Expressions for the partial properties can be obtained by differentiating Eqs. (5, 6) via Eq. (3) to give:

$$H_{\rm A}^{\rm E} = q_{\rm A} Y_{\rm B}^2 \sum_{i=0}^n h_i [Y_{\rm B} - Y_{\rm A})^i - 2i Y_{\rm A} (Y_{\rm B} - Y_{\rm A})^{i-1}] \quad (8)$$

$$S_{A}^{E} = q_{A} Y_{B}^{2} \sum_{i=1}^{n} s_{i} [(Y_{B} - Y_{A})^{i} - 2iY_{A}(Y_{B} - Y_{A})^{i-1}]$$
 (9)

$$H_{\rm B}^{\rm E} = q_{\rm B} Y_{\rm A}^2 \sum_{i=0}^{n} h_i [(Y_{\rm B} - Y_{\rm A})^i + 2iY_{\rm B}(Y_{\rm B} - Y_{\rm A})^{i=1}]$$
 (10)

$$S_{\rm B}^{\rm E} = q_{\rm B} Y_{\rm A}^2 \sum_{i=0}^n s_i [(Y_{\rm B} - Y_{\rm A})^i + 2iY_{\rm B}(Y_{\rm B} - Y_{\rm A})^{i-1}] \quad (11)$$

Whence

$$G_{\Lambda}^{\mathsf{E}} = H_{\Lambda}^{\mathsf{E}} - T S_{\Lambda}^{\mathsf{E}} \tag{12}$$

$$G_{\rm B}^{\rm E} = H_{\rm B}^{\rm E} - T S_{\rm B}^{\rm E} \tag{13}$$

The empirical coefficients h_i and s_i are tound by the simultaneous optimization of the thermodynamic and phase diagram data. No more than two terms were required in Eqs. (5, 6) for any of the 24 systems in the present study. That is n = 1 in Eqs. (5, 6).

Our experience with molten salt solutions has also shown that the enthalpic term $H^{\rm E}$ in Eq. (4) is generally larger in magnitude than the entropic term $TS^{\rm E}$. Hence, if available data are limited, it is a reasonable assumption to set $S^{\rm E}=0$ and to assume that $G^{\rm E}$ is temperature independent.

2.3. Limiting Slope of Liquidus Lines Estimation of Solid Solubility

In some systems, the extent of solid solubility is not known. In such cases, the measured limiting slope of the liquidus line (dX_A'/dT) at $X_A=1$ (pure A) can permit the extent of solid solubility to be estimated. In the limit at $X_A=1$, both the liquid and solid phases become Henrian such that $G_A^{E(s)}$ and $G_A^{E(\ell)}$ both approach zero. Similarly, for $X_A\approx 1$, the Gibbs energy of fusion of A is given by $\Delta_{fus}H_A^{\alpha}$ $(1-T/T_{fus}^{\circ}(A))$ where $\Delta_{fus}H_A^{\alpha}$ is the enthalpy of fusion of Λ at its melting point, $T_{fus}^{\epsilon}(A)$. Differentiation of Eq. (1) in the limit at $X_A=1$ then gives:

$$dX_A^s/dT - dX_A^s/dT = \Delta_{fits}H_A^s/R(T_{fits}^s(A))^2$$
when $X_A = 1$ (14)

From the known enthalpy of fusion and the measured limiting liquidus slope, dX'/dT, the limiting solidus slope, dX'/dT, can be calculated. If this is close to zero, then the solid solubility is of limited extent.

2.4. Intermediate Compounds

Some of the systems studied contain intermediate compounds. In no cases have the Gibbs energies of fusion of these compounds been measured. However, once $H^{\mathrm{E}(\ell)}$ and $S^{\mathrm{E}(\ell)}$ have been determined, the Gibbs energies of fusion of the compounds can be calculated from their measured liquidus lines via Eq. (1) if they are assumed to be stoichiometric compounds. Their Gibbs energies of formation from the pure liquid component salts can then also be calculated as the Gibbs energy of liquid-liquid mixing minus the Gibbs energy of fusion.

2.5. Properties of the Pure Salts

It should be noted that for all 24 binary systems reported here, one consistent set of melting points and transformation points of the pure salts has been adopted. In many reported experimental binary phase diagrams, the melting and transformations points differ significantly from these values. Account was taken of this problem in the evaluations.

The temperatures and Gibbs energies of fusion and transformation of all the pure component salts are listed in Table 1. These are based largely on data from a recent reference¹⁴. However, several data were revised during the course of the present evaluation. These revisions are discussed in the Appendix.

2.6. Optimization Procedure

The actual steps followed in an optimization vary from system to system. Details are given for each system in section 3. However, some general observations can be enunciated.

In four of the 24 systems, $H^{E(\ell)}$ in the liquid phase has been measured calorimetrically. These data were fitted to one or two membered series as in Eq. (5). Equation (1) was then used to calculate excess liquid Gibbs energies along the A- and B-liquidus lines. Combining these excess Gibbs energies with the already-fitted calorimetric liquid enthalpies permitted the excess liquid entropy, $S^{E(\ell)}$, to be calculated and then smoothed by representation as a 1- or 2-member polynomial as in Eq. (6).

In those systems for which calorimetric liquid enthalpies were not available, $S^{\mathrm{E}(\ell)}$ was set equal to zero, and the values of $G^{\mathrm{E}(\ell)} = H^{\mathrm{E}(\ell)}$ obtained from the phase diagram were then smoothed by polynomial representation with one or two terms.

2.7. Presentation of Results

The results of the analysis are presented together according to the anion pair of the binary systems. The reported experimental data are summarized in part (a) of the summary table for each group (Tables 2-7) The data are summarized with respect to both the invariants (type, temperature and composition range) and the liquidus data (reference and experimental method used). The abbreviations used are: E = eutectic, P = peritectic, 1:1 = melting point of an intermediate compound of this stoichiometry, TA = thermal analysis, V-P = visual/polythermal method, V = visual method (temperature of first appearance of crystals)

The phase diagrams are shown in Figs. 1-29. Not all reported experimental points are shown on the phase diagram in each case. However, all references found for each system have been included. The optimized coefficients of Eqs. (5, 6) for $H^{E(\ell)}$ and $S^{E(\ell)}$ of the liquid phase are given in Table 8. Calculated Gibbs energies of fusion and formation (from the pure liquids) of the intermediate compounds are listed in Table 9. The phase diagrams shown were calculated from these equations and are considered to be the "best" evaluated diagrams which can be deduced from the data currently available. Phase boundaries indicated by dashed lines are considered to be less accurately known.

In part (b) of the summary tables (Tables 2-7), the calculated invariants are identified by type, composition and temperature. In the "Comments" column, information is provided concerning the data used in the optimization, along with other pertinent remarks on the recommended phase diagram. The last column, "Accuracy," reports our estimate of the accuracy which should be attached to each recommended phase diagram.

3. The Evaluations

A) Systems A_2CO_3 -AF (Figs. 1-3) where A = Li, Na, K:

In all these systems the limiting liquidus slopes confirm the absence of solid solubility. This was confirmed by X-ray diffraction¹⁵ of the pure salts. None of the excess enthalpies of the liquid phases have been measured. The reported liquidus data were reproduced well with the assumption of regular solution expressions for H^E with $S^E = 0$. A summary of reported and evaluated data for these systems appears in Table 2.

For the K_2CO_3 -KF system, Schmitz-Dumont and Heckmann¹⁵ reported only a small phase diagram with smoothed curves and no data points. Amadori's tabulated data¹⁸ were therefore used in the optimization. There is a congruently melting compound KF·K₂CO₃ (684 °C < T_{fus} < 688 °C) reported by most of the authors^{15,17,18,22}; Schmitz-Dumont and Heckmann¹⁵ verified the composition by X-ray diffraction. The optimization gave the thermodynamic properties for the compound KF·K₂CO₃ listed in Table 9.

The calculated liquidus curves fall within 10 °C of experimental data in these three systems.

Salt		T _{fus} or T _{trs} (°C)	aX10 ⁻³	b	cX10 ³	d	eX10−5
LäF	$s \rightarrow \ell$	848	14.518	128.535	8.709	-21.494	-2.65
NaF	$s \rightarrow \ell$	996	10.847	156.584	4.950	-23.978	-1.07
KF	s→ℓ	857	13.763	127.035	7.211	-20.962	
LiCI	s→ℓ	610	4.420	197.318	16.435	-31.966	
NaCl	s→ℓ	801	7.735	202.091	11.925	-31.824	
KCI	$s{ ightarrow}\ell$	771	4.755	215.399	12.734	-33.581	1.82
	4, 32 TVL					and the second	500
LiNO ₃	s→ℓ	255	25.563	-48.415			
NaNO ₃	s→ℓ	310	15.177 ^{°°}	-26.033			
KNO ₃	α→β	130	5.110	-12.680			
	$oldsymbol{eta}{ ightarrow} oldsymbol{\ell}$	337	10.129	-16.605			
			00.00	00.040			
LiOH	s→l	477	20.962	-27.949			
NaOH	α β	297	6.360 6.360	11.158			
TOTAL	$\beta \rightarrow \ell$	320 249	6.360	-10.725			
КОН	$\alpha \rightarrow \beta$	249 404	6.339	-12.144			
	$oldsymbol{eta} \! o \! oldsymbol{\ell}$	404	9.372	-13.843			
Li ₂ SO ₄	α→β	<i>5</i> 78	25.650	-30,141			
	$\beta \rightarrow \ell$	860	8.990	- 7.935			
Na ₂ SO ₄	s→l	884	23.012	-19.889			
K₂SO4	$\alpha \rightarrow \beta$	583	8.954	-10.460			
C 75 9 3 7 4 4 7 4 4 7 4 4 7 4 4 7 4 4 7 4 4 7 4 4 7 4 4 7 4 4 7 4 7 4 7 4 7 4 7 4 7 4 7 4 7 4 7 4 7 4 7 4 7 4	$\beta { ightarrow} \ell$	1069	36.819	-27.436			
Li ₂ CO ₃	$\alpha{ ightarrow}oldsymbol{eta}$	410	4.438	- 3.277			
	$\beta \rightarrow \ell$	730	44.769	-44.635			
Na ₂ CO ₃	$\alpha \rightarrow \beta$	359	0.368	- 0.582			
	$\beta \rightarrow \tau$	485	2.536	- 3.346			
	$ au o \ell$	858	29.665	-26.229			
K ₂ CO ₃	$\alpha \rightarrow \beta$	422	0.230	- 0.331			
	BI	901	27.614	23.51			

Table 1. Thermodynamic properties of the pure salts (see Appendix) $\Delta_{\text{fus}}G^{\circ}$ or $\Delta_{\text{trs}}G^{\circ}=a+bT+cT^{2}+dT\ln T+e/T \text{ J mol}^{-1}$

B) Systems AF-A₂SO₄ (Figs. 4-6) where A = Li, Na, K:

The excess enthalpy of these systems has been measured by direct calorimetry, and sometimes also by solid-liquid mixing experiments³³. The results obtained by direct calorimetry²⁵ were considered to be more accurate and were used in every case. There are two congruently melting compounds, NaF·Na₂SO₄ and KF·K₂SO₄. A summary of reported and evaluated data appears in Table 3.

The limiting liquidus slopes at both extremes indicate negligible solid solubility in all systems.

In the system LiΓ-Li₂SO₄, all the liquidus data points^{15,23,25} are concordant within 5°. Since the data of Schmitz-Dumont and Heckmann¹⁵ appeared only on a phase diagram, an optimization was performed on the tabulated^{23,25} data.

For the NaF-Na₂SO₄ system, the liquidus data and pure salt melting points of Wolters²⁷ are lower than those

For the NaF-Na₂SO₄ system, the liquidus data and pure salt melting points of Wolters²⁷ are lower than those of other authors ^{15,25,26,28} which latter are concordant within 10° except near the lower eutectic, where there is greater scatter. The optimization was performed on the more recent data^{25,26} which are representative of other work.

A congruently melting compound NaF·Na₂SO₄ is reported^{25-30,32}. Reported melting points lie in the range 781-787 °C. The stoichiometry was verified by X-ray diffraction¹⁵. The optimization gave thermodynamic properties for NaF·Na₂SO₄ which are listed in Table 9.

For the system KF-K₂SO₄, the melting points of the pure salts in Refs. 28 and 34 are up to 10° different from the accepted values of Table 1 and the liquidus curves lie consistently highly than in the more recent studies^{25,26} which are in good agreement. The data of Schmitz-Dumont and Heckmann¹⁵ appeared only as smoothed curves on a phase diagram and were omitted in the analysis. The congruently melting compound KF·K₂SO₄ has

been reported by references 25, 26, 28, 34. Reported melting points lie in the range 871–886 °C. The compound was studied by optical properties of thin sections, thermal analysis and X-ray diffraction^{15,28,34}. The optimization performed on the data of Refs. 25 and 26 gave the thermodynamic properties for KF·K₂SO₄ listed in Table 9.

The calculated liquidus curves in all systems lie within 10° of the chosen data.

C) Systems ACl-A₂CO₃ (Figs. 7-9) and ACl-A₂SO₄ (Figs. 10-12) where A = Li, Na, K:

For most of these systems, reported liquidus data are relatively abundant. They are all simple eutectic systems. The fit to the data is generally good. A summary of reported and evaluated data appears in Table 4.

In all these systems, no solid solubility was reported. In some cases the limiting liquidus slopes suggested some solubility. However, this possibility could not be sustained due to errors in the reported melting points of the pure salts and due to lack of supporting data in these and similar systems. Therefore zero solid solubility was as-

sumed in each case. There are no reports of experimental measurement of the excess enthalpy of the liquids.

For the system NaCl-Na₂CO₃, the liquidus data points of the oldest work⁴⁰ deviate consistently from the later^{18,38,41,42,44} and were not considered further. Some inaccuracy in the melting point of pure NaCl Refs. 18 and 44, causes scatter in the experimental data on the NaCl side, but in the rest of the phase diagram agreement isgood among the data of Refs. 18, 38, 41, 42, 44, which were all used in the optimization.

For the system KCl-K₂CO₃, the data of Sackur^{38,41} are limited to rather dilute solutions only. His data suggest solid solubility on the K₂CO₃ side, but this is contradicted by Amadori's more extensive data¹⁸. Thus only two data sources^{18,47} were used in the optimization.

In the system NaCl-Na₂SO₄, the scatter among all experimental liquidus data is as much as 20° over the phase diagram. Most of the data^{27,28,38,63,65,69,70,73} are more concordant, while those of Refs. 67 and 71 are respectively high by 15° and 10°. The reported melting point of Na₂SO₄ is higher than the accepted value by 8° in Ref. 73 and 13° in Ref. 65. The liquidus data of Nagornyi and Zimina Ref. 69 are representative of the more concordant data and were used in the calculations.

All liquidus data^{15,18}

used in optimization

Data of Ref. 18 optimized

 ± 10

 ± 5

Table 2. Systems A_2CO_3 -AF where A = Li, Na, K

System			Invariants and congruent melting points data ranges				
(A-B)	Ref.	Туре	X_{B}	°C	Ref. &	method	
Li ₂ CO ₃ -LiF	15–17	E	0.45-0.49	600-608	15(TA)	16(TA)	
Na ₂ CO ₃ -NaF	15,17-22	E	0.39-0.40	686–700	15(TA)	18(TA)	
K ₂ CO ₃ -KF	15,17,18,	E	0.46-0.48	682-688	15(TA)	18(TA)	
•	21.22	E	0.60-0.62	677-682			
		1:1	0.5	684-688			
		(b) Summar	y of evaluated diagra	m			
System	Invariants an	d congruent melt	ing points		A	ccuracy	
(A-B)	Туре	X_{B}	°C	Comments		°C	
Li ₂ CO ₃ -LiF	E	0.500	609	All liquidus data ¹⁵ used in optimization		±10	

694

687

679

688

0.410

0.456

0.602

0.5

E

 \mathbf{F}

1:1

Na₂CO₃-NaF

K2CO3-KF

D) Systems A_2CO_3 -AOH (Figs. 13-17) where A = Li, Na, K:

These three systems are simple eutectics. The difference in the melting points of the hydroxides and the carbonates is at least 250°, and so the eutectic is always close to the hydroxide side. A summary of reported and evaluated data is presented in Table 5.

The excess enthalpy of the liquid has not been reported in these systems. The limiting liquidus slopes do not suggest solid solubility.

Perfil'eva and Reshetnikov studied the system Li₂CO₃-LiOH twice^{81,82} and their later data⁸² are inconsistent with their earlier⁸¹. The phase diagrams they presented are incoherent and were not considered further in this analysis. The data of the French authors⁸⁰ are therefore used in the calculations, although their reported melting point of pure Li₂CO₃ is lower by nearly 20° than the accepted value.

For the system Na₂CO₃-NaOH, the liquidus curves defined by Refs. 80, 84, 86, 87 are reasonably concordant

(within 10°) and were used in the present calculations. The data of Ref. 85 were rejected because they were consistently higher than the others. The oldest report⁸³ shows severely scattered data and refers to a minimum, rather than a eutectic.

There are two groups of liquidus data for the system K_2CO_2 -KOH: the first includes data of Khitrov⁸⁵ and Michaud⁸⁹. Data in this first group are higher by as much as 50° than those in the second group⁸⁰. It is not evident from simple inspection which data are closer to true behavior. It was possible to fit accurately each group of data. However, when $G^{E(\ell)}$ was set to zero, the calculated liquidus lay between the two groups of experimental points. Thus it was decided that the assumption of an ideal liquid would probably better reflect the excess properties of this phase.

The excess enthalpy of these systems, as obtained by optimization of the phase diagram data, is seen (Table 8) to approach ideality as the cation radius increases.

TABLE 3. Systems AF-A₂SO₄ where A = Li, Na, K

		(a). Summ	ary of reported data	14,4,4,4,4,4,4,4,4,4,4,4,4,4,4,4,4,4,4,	
0	Invariants an melting points			•	Liquidus data
System — (A-B)	Ref.	Туре	$X_{\mathtt{B}}$	°C	Ref. & method
Li//F,SO ₄	15,23–25	Е	0.56-0.58	531–535	15(TA) 23(V-P) 25(TA)
Na//F,SO4	15,22 25–33 1:1	E E 0.5	0.36–0.41 0.70–0.73 781–787	772–781 742–750	15(TA) 25(TA) 26(V-P)27(TA) 28(TA)
K//F,SO4	15,22, 24 26 28,33–35	E E 1:1	0.58-0.59 0.16 0.17 0.5	864–883 776-788 871–886	15(TA) 25(TA) 26(V-P)28(TA) 34(TA)

System		ariants and congruent nelting points		Accuracy	
(A-B)	Туре	X_{B}	°C	Comments	°C
LiF-Li ₂ SO ₄	E	0.587	531	Excess enthalpy of Ref. 25 and liquidus data of Refs. 23 and 25 used in optimization	±5
NaF-Na ₂ SO ₄	E E 1:1	0.411 0.712 0.5	779 748 785	Excess enthalpy of Ref. 25 and liquidus data of Refs. 25 and 26 used in optimization	±10
KF-K ₂ SO ₄	E E 1:1	0.169 0.575 0.5	779 869 872	Excess enthalpy of Ref. 25 and liquidus data of Refs. 25 and 26 used in optimization	±10

DESSUREAULT, SANGSTER, AND PELTON

Table 4. Systems ACl-A $_2$ CO $_3$ and ACl-A $_2$ SO $_4$ where A = Li, Na, K

	(a). Summary of reported data							
System	·	Liquidus data						
(A-B)	Ref.	Туре	X_{B}	°C	Reference & method			
LiCl-Li ₂ CO ₃	36, 37	Е	0.24-0.28	506-507	37(TA)			
NaCl-Na ₂ CO ₃	18,20,21, 29,38–45	E	0.41-0.47	632-645	18(TA),38(T),40(V) 41(TA),42(TA), 44(V-P)			
KCl-K ₂ CO ₃	18,20,21, 38,41, 46–49	E	0.35-0.38	623-636	18(TA),38(TA), 41(TA)47(V-P)			
LiCl-Li ₂ SO ₄	36,50-63	E	0.35-0.37	476–488	50(V-P),57(V-P), 58(V-P),59(V-P), 60(V-P),61(V-P),			
					62(V-P),63(TA & V-P),			
NaCl-Na ₂ SO ₄	27–29,38 39,63–75	E	0.45-0.48	623-634	27(TA),28(T), 38(TA) 63 (V-P),65(TA), 67(TA),69(V-P) 73(TA)			
KCl-K ₂ SO ₄	28,39,59, 62,65,70, 76–79	E	0.23-0.29	688–694	28(TA),59(V-P) 65(TA),70(V-P) 76(TA),77(TA)			

System		Invariants			Accuracy
(A-B)	Type	X _B	°C	Comments	°C
LiCl-Li ₂ CO ₃	E	0.262	509	Data of Ref. 37 optimized Calculated liquidus lies within 6° of data	±10
NaCl-Na ₂ CO ₃	E	0.448	634	Data of Refs. 18,38,41, 42,44 optimized	±10
KCl-K ₂ CO ₃	E	0.366	629	Data of Refs 18 and 47 used in optimization. Calculated liquidus lies within 5° of data	±5
LiCl-Li ₂ SO ₄	E	0.368	480	Data of Refs. 50,57-63 used in optimization.	± 15 (X _B > 0.75)
				Calculated liquidus deviates slightly more on steep side $(X_B > 0.75)$	± 10 ($X_B > 0.75$)
NaCl-Na ₂ SO ₄	Е	0.481	628	Data of Ref. 69 optimized Calculated liquides lies within 5° of data	±5
KCl-K ₂ SO ₄	E	0.263	690	All data Refs. 28,59,65, 70,76,77 used in optimization (up to 25° scatter on K ₂ SO ₄ side	±5 (KCl side) ±15 (K ₂ SO ₄ side)

E) Systems AOH-A₂SO₄ (Figs. 18-22) where A-Li, Na, K:

These systems present several difficulties in analysis. There are no phase diagram or thermodynamic data available for LiOH-Li₂SO₄; the stoichiometry of intermediate compounds has been a matter of dispute in NaOH-Na₂SO₄; the few liquidus data for KOH-K₂SO₄ are limited to a small composition interval near the KOH extreme. A summary of reported and evaluated data is given in Table 6.

No excess enthalpy data are available for these systems.

Only a tentative phase diagram can be calculated for the system LiOH-Li₂SO₄, based on critically evaluated data for the analogous common-cation systems NaOH-Na₂SO₄ and KOH-K₂SO₄ studied here. It is possible that the Li system may contain one or more compounds, as do the NaOH-Na₂SO₄ system and the analogous isostructural systems^{91,92} MOH-M₂CrO₄ (M = Li, Na, K). For the system NaOH-Na₂SO₄, the data of Ravich and Elenevskaya⁹⁶ are up to 25° higher than those of Bergman and Khitrov⁹³. In the latest report⁹⁷, only the invariants were studied. The rest of the diagram is based

on a previous work⁹⁶. The peritectic near 480 °C has been reported by all investigators⁹³⁻⁹⁷, but the stoichiometry of the compound associated with it is not certain. Some authors^{94,96,97} studied the compound by thermal analysis and X-ray diffraction and reported the stoichiometry as 2NaOH·3Na₂SO₄. They reported a solid phase transition of this compound at 418 °C. Others^{93,95} claim the stoichiometry to be 1:1 but with no supporting evidence.

In three works^{94,96,97} a second experimental peritectic is given at 316 °C with the compound 2NaOH·Na₂SO₄ assigned to it. Although the presence of 2:3 and 2:1 compounds is possible, the calculated diagram shows only the 1:1 compound. Separate optimizations were performed on the two sets of liquidus data^{93,96}. The eutectic calculated from the data of Bergman and Khitrov⁹³ is closer to the experimental, and so these data were used in the analysis. The optimization gave the thermodynamic properties for the compound NaOH·Na₂SO₄ listed in Table 9.

At those composition extremes where liquidus data were available in these systems, the limiting liquidus slopes did not indicate any solid solubility. Zero solubility was assumed in all systems.

TABLE 5. Systems A₂CO₃-AOH where A = Li, Na, K

		(a). Summa	ry of reported dat	a ·		
System	Invariants I	Data Ranges			Liquidus data	
(A-B)	Ref.	Туре	ХB	°C	Ref. & method	
Li₂CO₃-LiOH	80–82	E	0.82-0.90	419-442	80(TA) 81(TA) 82(TA)	
Na ₂ CO ₃ -NaOH	80,83-88	E	0.90-0.94	283–292	80(TA), 83(TA) 84(TA), 85 (V-P) 86(TA), 87(TA)	
K₂CO₃-KOH	80,82,85,	E	0.90-0.91	360–367	80(TA) 85(V-P) 89,90 89(TA)	
	t deservation	(b). Summary	of evaluated diag	ram		
Li ₂ CO ₃ -LiOH	Е	0.822	418	Data of Ref. 80 used in optimization. Calculated liquidus lies within 5° of data	±5	
Na ₂ CO ₃ -NaOH	# 1 E - 2	0.917	· 285	Data of Refs. 80,84,86,8 used in optimization. Ca culated liquidus lies with 10° of data	l-	
K₂CO₃-KOH	E	0.907	367	Calculated liquidus offer as best compromise amo badly scattered data		

F) Systems A_2CO_3 -ANO₃ (Figs. 23-25) and ANO₃-A₂SO₄ (Figs. 26-29) where A=Li, Na, K:

In all these systems, the phase diagram data available were always confined to a composition region near the pure nitrate. The difference between the melting points of the nitrate and the other salt can be as high as 700 °C. As a consequence, the phase diagrams are highly asymmetric, and liquidus data are consistently missing at higher temperatures due to decomposition of the mixtures. A summary of reported and evaluated data for these systems appears in Table 7.

It is possible that these six systems contain solid solubility similar to the M_2CO_3 - M_2SO_4 (M=Li, Na, K) systems⁵. While the limiting liquidus slopes are consistent with zero solid solubility in the nitrates, there are no data to indicate whether or not there is solid solubility at the other extreme. Zero solubility was assumed at both extremes in the present calculations.

The excess enthalpy has been measured only for the system NaNO₃-Na₂SO₄¹⁰³ in the composition range

 $0.05 < x_B < 0.08$. Kleppa and Meschel¹⁰³ extrapolated from their results the following equation for the enthalpy of mixing:

$$H^{\rm E} = (-210 \pm 840) X_{\rm A} X_{\rm B} \,\text{J mol}^{-1}.$$
 (15)

An optimization with the phase diagram data and Eq. (15) gave improbably large negative entropy terms. Therefore, the equation of Kleppa and Meschel were rejected and phase diagram data and calorimetric measurements were optimized together. The results give an equation for the enthalpy of mixing which is within the error limits of the enthalpy measurements (Table 8).

In the NaNO₃-Na₂SO₄ system, the data of Refs. 64 and 98 are consistently lower than those of Ref. 102 by as much as 20°; particularly in the steep part of the liquidus. An optimization on the data of Ref. 102 yielded thermodynamic properties more consistent with the analogous systems studied here.

TABLE 6. Systems AOH- A_2SO_4 where A = Li, Na, K

	In	variants Data Rang	ges	-	Liquidus data
System (A-B)	Ref.	Туре	$X_{\mathtt{B}}$	°C	Ref. & method
NaOH-Na ₂ SO ₄	93–97	Е	0.04-0.06	290–293	93(V-P),
		Ρ.	0.33-0.36	480-485	96(V-P),
		P	0.08-0.1	316	97(TA)
KOH-K ₂ SO ₄	93	E	0.055	370	93(V-P)

System	Invariants				Accurac	CUTACU
(A-B)	Туре	X _B	°C	Comments		°C
L1OH-Li2SO4	E	0.27	395	Tentative diagram only		
NaOH-Na ₂ SO ₄	E P	0.064 0.34	292 470	Data of Ref. 93 used in optimization. Calculated liquidus lies within 10° of data		±10
KOH-K₂SO₄	E	0.056	377	All available data Ref. 93 used in optimization	(X	± 10 $_{\rm B} < 0.4$ ± 25 $_{\rm B} > 0.4$

In the KNO₃-K₂SO₄ system, Amadori's data⁹⁸ are consistently lower and those of Perman and Howell's¹⁰⁵ but consistently higher (perhaps due to a KNO₃ melting point 3° higher than the accepted value) than the others^{103,106}. The few points of Kuz'mina¹⁰⁶ agree with Ref. 102. The data of Bergman and Vaksberg¹⁰² were chosen for the optimization.

In most of these systems, both eutectic and liquidus data were fitted well simultaneously. In those cases (Li₂CO₃-LiNO₃ and KNO₃-K₂SO₄) where this was not true, greater weight was given to the liquidus data. This preference resulted in liquid excess properties more in accordance with those observed in the other systems of this group.

All these systems show positive deviations from ideal liquid solution behavior (Table 8).

All six systems were re-evaluated by assuming ideal liquid behavior and solid solubility of the nitrates in the carbonates and sulfates. The solid solutions were assumed to obey Henry's Law. Solid solubilities of the order of 50 mol% were calculated at the eutectic temperatures. However, in order to fit the reported liquidus curves, improbably large entropic terms were required for the Henrian solutions. Most likely there is some solid solubility of the nitrates in the carbonates and sulfates, but not as much as indicated by this analysis. Thus, the real values of $G^{\rm E}$ for the liquid phase are probably somewhat less positive than the values in Table 8, but the liquids still exhibit positive deviations.

TABLE 7. Systems A₂CO₃-AOH where A = Li, Na, K

(a). Summary of reported data						
System	Invariants D	ata Ranges				
	Ref.	Туре	<i>X</i> _B	, C	Ref. & method	
Li ₂ CO ₃ -LiNO ₃	98	E	0.98	250	98(TA)	
Na ₂ CO ₃ -NaNO ₃	98	E	0.98	304	98(TA)	
K ₂ CO ₃ -KNO ₃	98	E	0.96	326	98(TA)	
LiNO3-Li2SO4	98-100	E	0.01-0.02	245-252	98(TA)	
NaNO3-Na2SO4	64, 98 100–103	E	0.03-0.05	296-304	64(TA & V-P), 98(V),102(V-P)	
KNO3-K2SO4	98,99,102 104–107	E	0.01-0.03	332–338	98(TA),102(V-P) 105(V),106(V-P)	

System (A-B)	Invariants					
	Туре	X _I	°C	Comments	Accuracy °C	
Li ₂ CO ₃ -LiNO ₃	Е	0.997	254.6	Data of Ref. 98 optimized	$\pm 10 \ (X_{\rm B} > 0.7)$	
					$\pm 20 \ (X_B < 0.7)$	
Na ₂ CO ₃ -NaNO ₃	E	0.978	306	Data of Ref. 98 optimized	$\pm 10 \ (X_{\rm B} > 0.7)$	
					$\pm 20 \ (X_{\rm B} < 0.7)$	
				the second second		
K ₂ CO ₃ -KNO ₃	E	0.964	326	Data of Ref. 98 optimized	$\pm 10 \ (X_{\rm B} > 0.7)$	
					$\pm 30 \ (X_{\rm B} < 0.7)$	
LiNO3-Li2SO4	E	0.015	253.3	Data of Ref. 98 optimized	$\pm 10 \ (X_{\rm B} > 0.3)$	
				· ·	$\pm 50 \ (X_{\rm B} < 0.3)$	
NaNO3-Na2SO4	E	0.049	300	Data of Ref. 102 optimized	$\pm 10 \ (X_{\rm B} > 0.4)$	
					$\pm 20 \ (X_{\rm B} < 0.4)$	
KNO3-K2SO4	E	0.009	334	Data of Ref. 102 optimized	$\pm 15 \ (X_{\rm B} > 0.2)$	
					$\pm 50 \ (X_{\rm B} < 0.2)$	

DESSUREAULT, SANGSTER, AND PELTON

TABLE 8. Optimized excess properties of the liquid^a

$$H^{\rm E} = Y_{\rm A} Y_{\rm B} (h_0 + h_1 (Y_{\rm B} - Y_{\rm A})) \, {\rm J \ equiv}^{-1}$$
 $S^{\rm E} = Y_{\rm A} Y_{\rm B} (s_0 + s_1 (Y_{\rm B} - Y_{\rm A})) \, {\rm J \ K}^{-1} \, {\rm equiv}^{-1}$

System (A-B)	h_0	h_1	<i>s</i> ₀	<i>s</i> ₁
Li ₂ CO ₃ -LiF	—1477	0	0	0
Na ₂ CO ₃ -NaF	-450	0	0	0
K ₂ CO ₃ -KF	-1150	0	0	0
LiF-Li ₂ SO ₄ ^b	-988	-359	2.352	0
NaF-Na ₂ SO ₄ ^b	56	-217	1.214	-2.044
KF-K ₂ CO ₄ ^b	-1263	486	1.522	0
LiCl-Li ₂ CO ₃	-1712	0	0	
NaCl-Na ₂ CO ₃	498	0	0	0
KCl-K ₂ CO ₃	923	1470	0	0
LiCl-Li ₂ SO ₄	280	336	0	0
NaCl-Na ₂ SO ₄	1256	197	. 0	0
KCl-K ₂ SO ₄	1098	—1038	0	0
Li ₂ CO ₃ -LiOH	4290	806	0	0
Na ₂ CO ₃ -NaOH	-2496	-818	0	. 0
K ₂ CO ₃ -KOH	0	0	0	0
LiOH-Li ₂ SO ₄ c	-3000 ± 500	0	0	0
NaOH-Na ₂ SO ₄	-3105	0	0	0
KOH-K ₂ SO ₄	-2320	762	0	0
Li ₂ CO ₃ -LiNO ₃	4480	-3263	0	0
Na ₂ CO ₃ -NaNO ₃	3856	-2607	0	0
K ₂ CO ₃ -KNO ₃	2763	-1557	0	0
LiNO ₃ -Li ₂ SO ₄	6064	4750	0	0
NaNO ₃ -Na ₂ SO ₄	3371	2825	0	0
KNO3-K2SO4	2631	2268	0	0

^aAll coefficients are assumed to be independant of temperature.

Table 9. Calculated Gibbs energies of fusion and of formation (from pure liquid components) of intermediate solid compounds

$\Delta_{\text{fus}}G^{\circ}=a+bT\left(\mathbf{K}\right)\mathbf{J}\ \mathrm{mol}^{-1}$							
$\Delta_{\mathbf{f}}G^{\circ} = a' + b'T(\mathbf{K}) \mathbf{J} \mathbf{mol}^{-1}$							
Compound	а	b	a'	b'			
(KF) _{0.5} (K ₂ CO ₃) _{0.5}	18041	-18.760	18424	12.999			
(NaF) _{0.5} (Na ₂ SO ₄) _{0.5}	21629	-20.432	-21635	14.493			
(KF) _{0.5} (K ₂ SO ₄) _{0.5}	38629	-33.726	-38996	27.457			
(NaOH) _{0.5} (Na ₂ SO ₄) _{0.5}	18323	-24.014	-19358	18.253			

^bCalorimetrically determined excess enthalpy²⁵.

^cNo data available for this system.

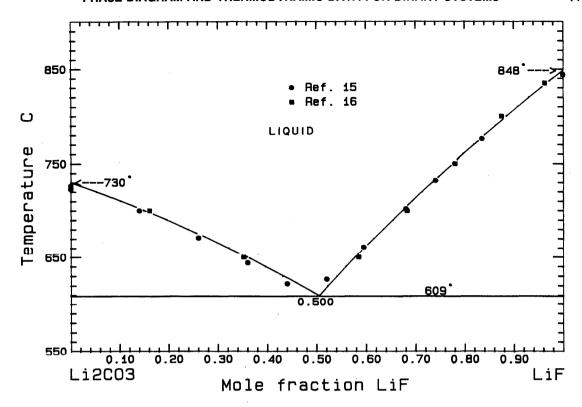


FIG. 1. The system Li₂CO₃-LiF.

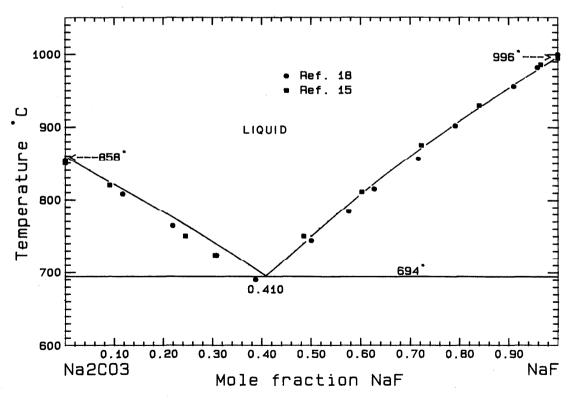


Fig. 2. The system Na₂CO₃-NaF

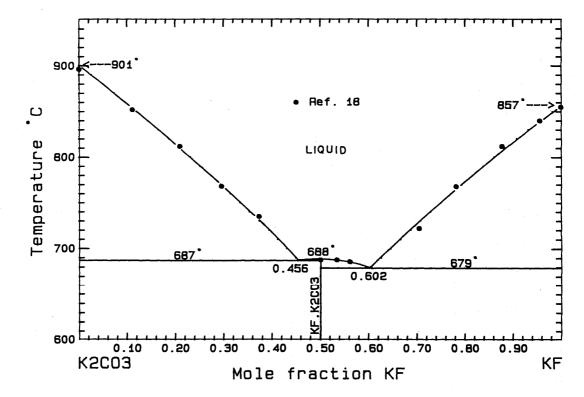


Fig. 3. The System K_2CO_3 -KF.

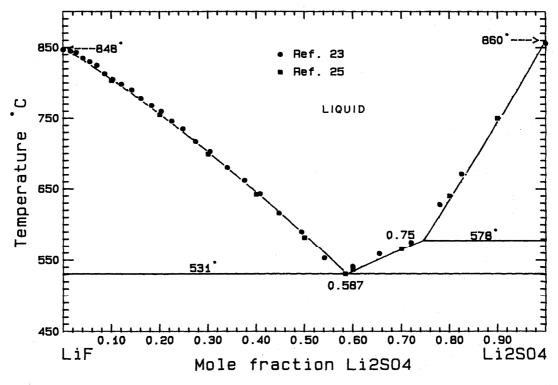


Fig. 4. The system LiF-Li₂SO₄.

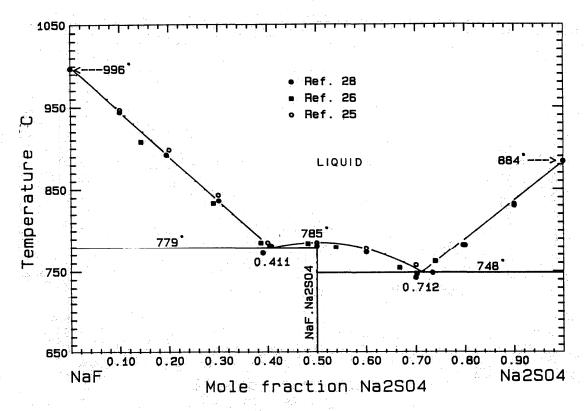


Fig. 5. The system NaF-Na₂SO₄.

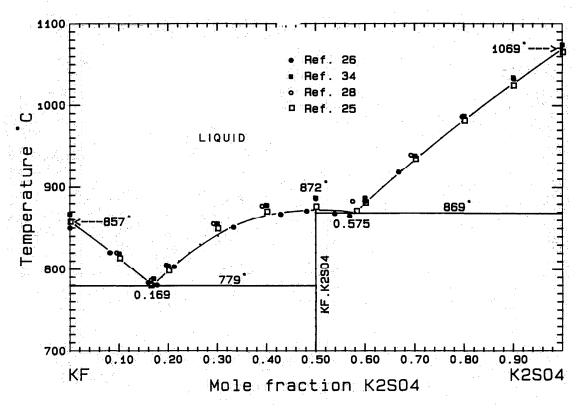


Fig. 6. The system KF-K₂SO₄.

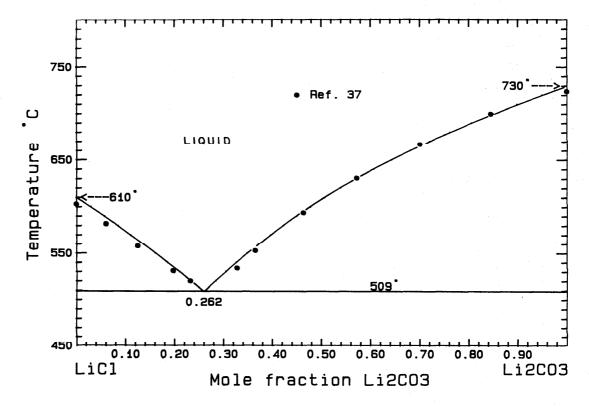


Fig. 7. The system LiCl-Li₂CO₃.

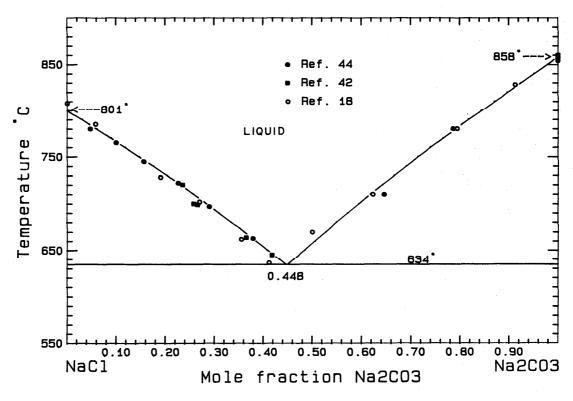


Fig. 8. The system NaCl-Na₂CO₃.

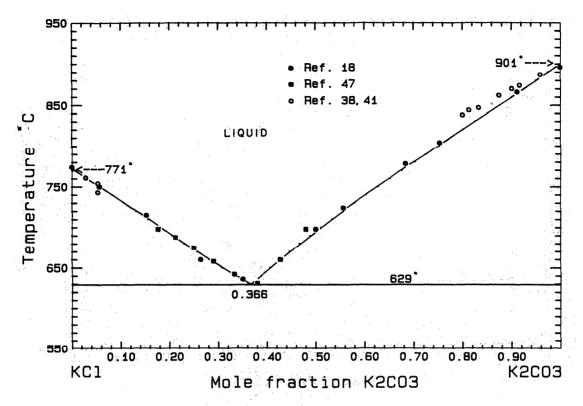


FIG. 9. The system KCl-K2CO3.

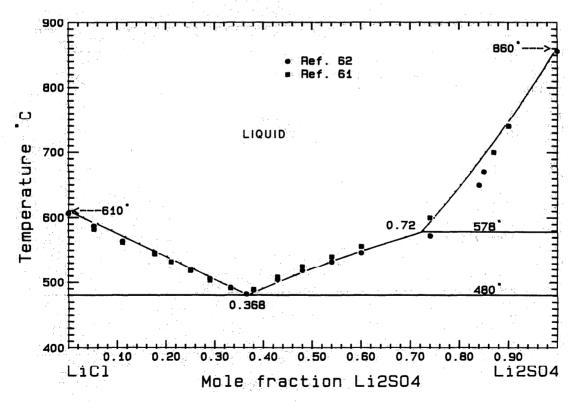


Fig. 10. The system LiCl-Li₂SO₄.

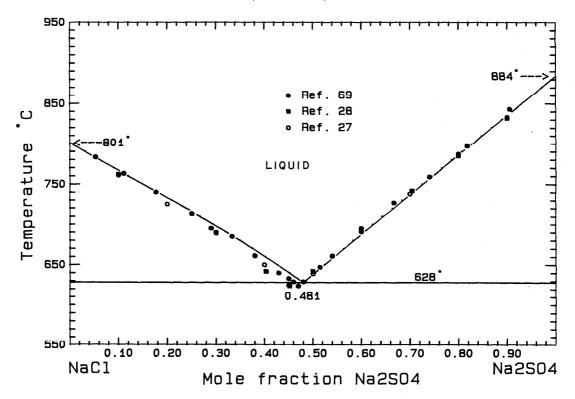


Fig. 11. The system NaCl-Na₂SO₄.

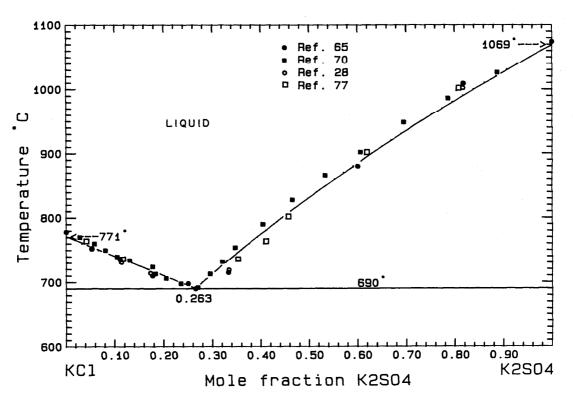


Fig. 12. The system KCl-K₂SO₄.

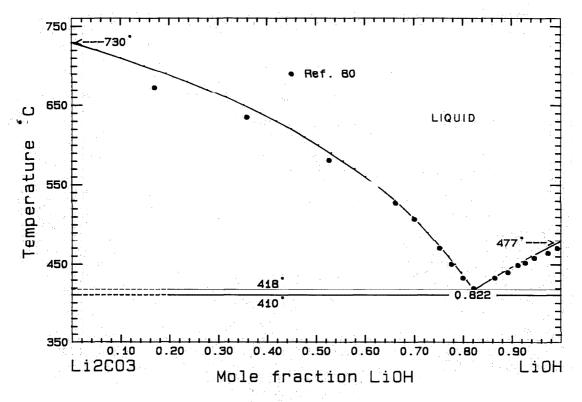


Fig. 13. The system Li₂CO₃-LiOH.

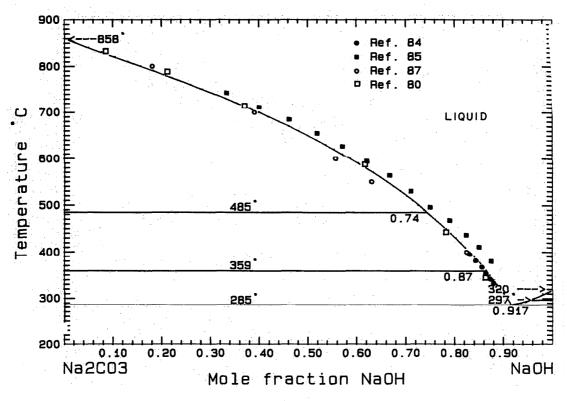


Fig. 14. The system Na₂CO₃-NaOH.

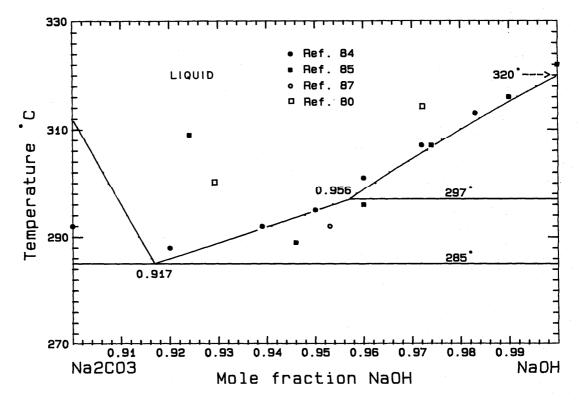


FIG. 15. The system Ha₂CO₃-NaOH enlarged.

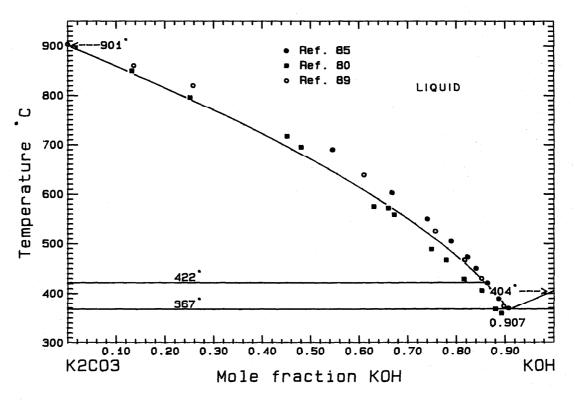


Fig. 16. The system K_2CO_3 -KOH.

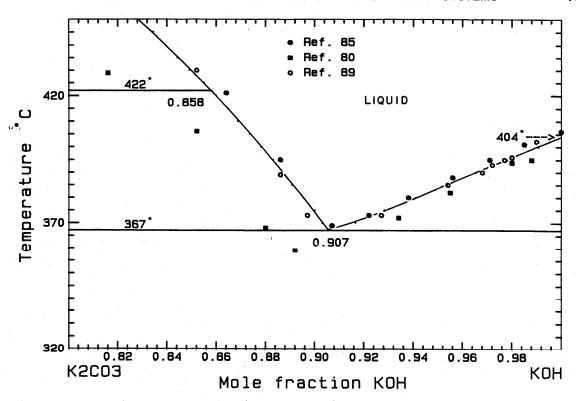


Fig. 17. The system K_2CO_3 -KOH enlarged.

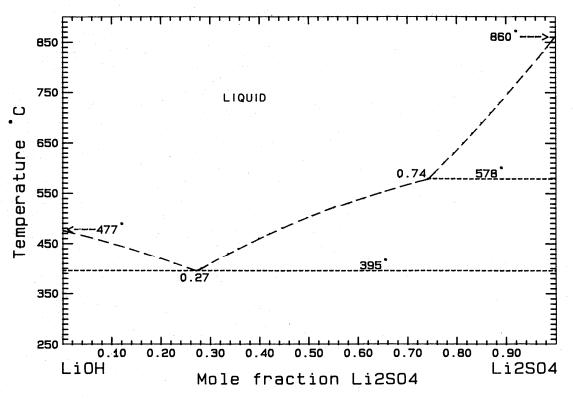


Fig. 18. The system LiOH-Li₂SO₄.

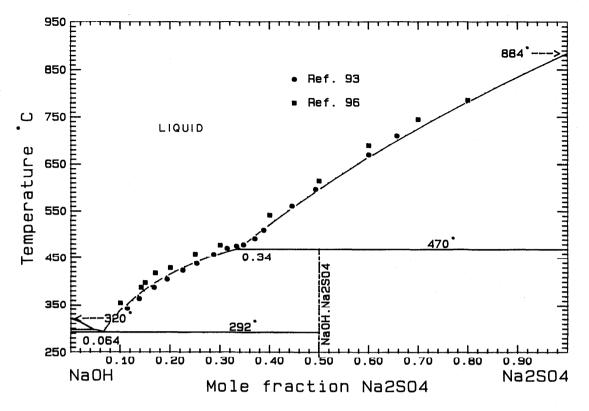


Fig. 19. The system NaOH-Na₂SO₄.

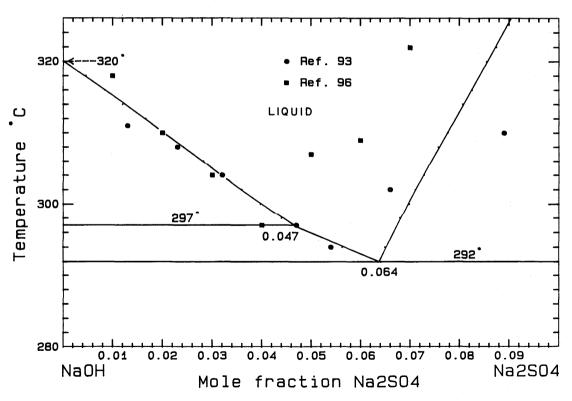


Fig. 20. The system NaOH-Na₂SO₄ enlarged.

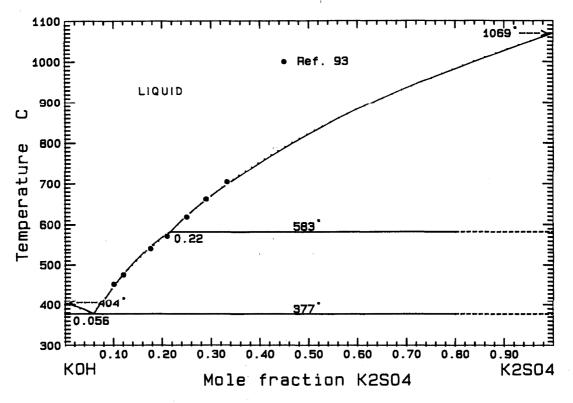


Fig. 21. The system KOH-K₂SO₄.

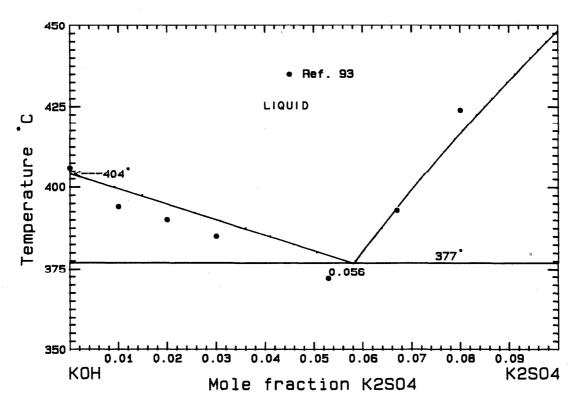


Fig. 22. The system KOH-K₂SO₄ enlarged.

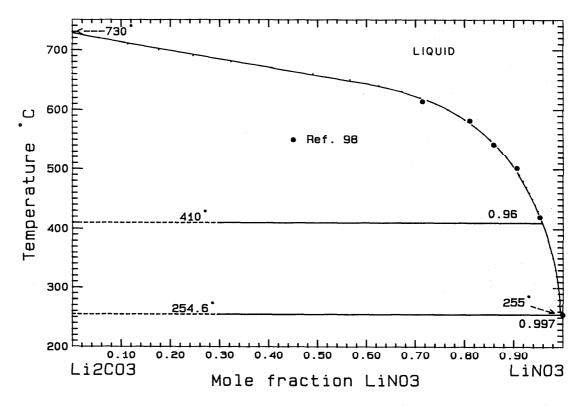


Fig. 23. The system Li₂CO₃-LiNO₃.

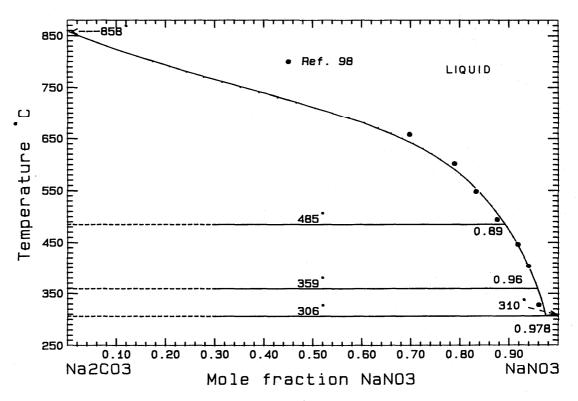


Fig. 24. The system Na₂CO₃-NaNO₃.

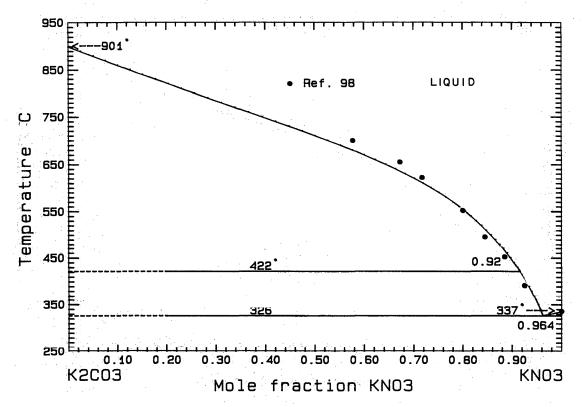


Fig. 25. The system K₂CO₃-KNO₃.

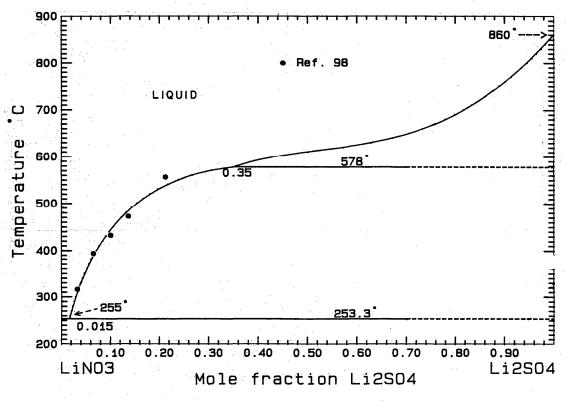


Fig. 26. The system LiNO₃-Li₂SO₄.

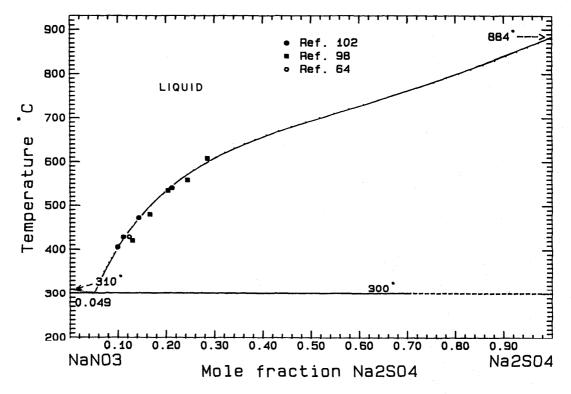


Fig. 27. The system NaNO₃-Na₂SO₄.

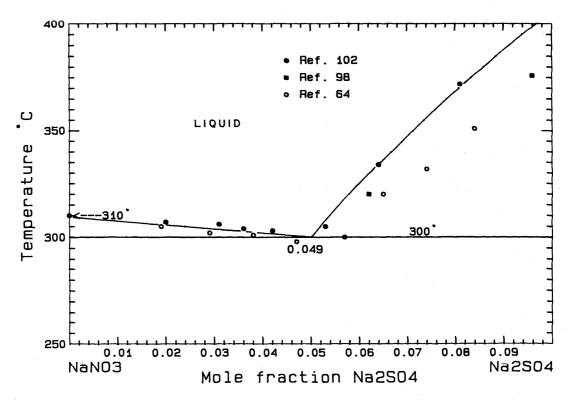


Fig. 28. The system NaNO3-Na2SO4 enlarged.

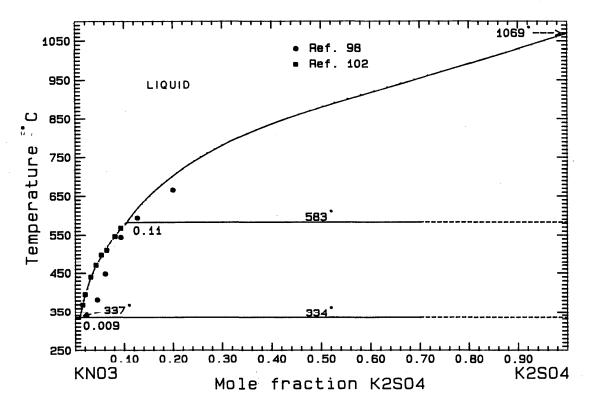


Fig. 29. The system KNO₃-K₂SO₄.

4. Appendix. Thermodynamic Properties of the Pure Salts

Unless stated below, properties have been taken from Ref. 14.

LiNO₃

Reference 14 contains no data for this compound. A survey of binary phase diagrams containing LiNO₃ in two large compilations^{2,5} revealed reported melting points in the range 244–270 °C; more careful work on the pure salt¹⁰⁸⁻¹¹¹ indicated 253–255 °C. The value 255 °C was chosen for the present work. Calorimetric determinations of the enthalpy of fusion¹⁰⁹⁻¹¹³ indicated values between 24 940 and 26 740 J mol⁻¹; a mean value of 25563 J mol⁻¹ is used here.

NaNO₃

Based on the following studies^{108,109,115,116}, the value of 310 °C was chosen for the melting point of NaNO₃. For the enthalpy of fusion, calorimetrically determined values communicated both before^{109-112,117,118,121,122} and after^{114,119,120} the appearance of Ref. 14 suggest a slightly higher value of 15 177 J mol⁻¹ used in this work.

KNO₃

Based on the following studies ^{109,114,115,123}, the value of 337 °C was chosen for the melting point of KNO₃. Calorimetrically determined enthalpies of fusion ^{109,111,112,114,116,121} vary between 9205 and 10 753 J mol⁻¹, and a slightly higher value of 10129 J mol⁻¹, was used in the present work. Rather large uncertainty limits must be assigned to this value.

Li₂CO₃

The reported polymorphism of Li₂CO₃, as determined by thermal analysis, includes a number of apparent transition temperatures, although investigators do not agree on their status. Reisman¹²⁴ discovered that some are spurious, due to impurities (LiOH, Li₂O) introduced by decomposition or the presence of water. The analysis should therefore be done under a dry CO₂ atmosphere^{124,125}. Only the transition at 410 °C is retained here, and the enthalpy of transition from Ref. 14 has been used. Based on the data of Ref. 126, the melting point was chosen as 730 °C. The most recently determined enthalpy of fusion, 73 400 J mol⁻¹⁽¹²⁶⁾, is not consistent with the same authors⁽¹²⁶⁾ phase diagram data for Li₂CO₃-Li₂SO₄, and so the value from Ref. 14, 44770 J mol^{-1 14,125} was used instead.

Na₂CO₃

The same confusion concerning apparent phase transitions in Li₂CO₃, described above, applies to Na₂CO₃¹²⁷. For present purposes, two transition temperatures were retained: 359 °C and 485 °C, after Janz and Perano¹²⁸. These temperatures are within 5° of other independent measurements^{127,129-131}. The enthalpies of transition were taken also from Ref. 128. A melting point of 858 °C has been chosen, based on the data of Ref. 125.

K₂CO₃

The same confusion concerning apparent phase transitions in Li_2CO_3 , described above, applies to $\text{K}_2\text{CO}_3^{124}$. For present purposes, one phase transition at 422 °C^{124,128,130} was retained. Although this transition has been called second order^{132,133} with zero enthalpy, the volume and crystal structure change, and its manifestation in a phase diagram clearly indicates otherwise. The enthalpy of transformation reported by Janz and Perano¹²⁸ is used.

LiOH

The melting point given in Ref. 14 is 471 °C. In a survey of phase diagram data of binary systems involving LiOH^{2.5}, the reported melting points lie in the range 462–477 °C with most being greater than 473 °C. The value of 477 °C was chosen as representative.

NaOH

The transition temperature given in Ref. 14 is 295 °C. In a survey of phase diagram data of binary systems involving NaOH^{2.5}, the reported transition temperatures lie in range 294–300 °C. The value of 297 °C was chosen as representative.

KOH

The melting point given in Ref. 14 is 400 °C. In a survey of phase diagram data of binary systems involving KOH^{2.5}, the reported melting points lie in the range 360–410 °C, with most being greater than 400 °C. The value 404 °C was chosen as representative.

Li₂SO₄

Although Ref. 14 lists the phase transition temperature as 586 °C, careful work on the pure salt^{120,126,134–138,141} as well as values reported in binary phase diagram data^{2,5} indicate a temperature in the range 572–579 °C. In the present work, 578 °C was adopted. Calorimetric determinations of the enthalpy of transition^{120,126,134,135,139,141} indicate values between 24 200 and 28 880 J mol⁻¹. A slightly revised enthalpy of 25 650 J mol⁻¹ is used here. The melting point was taken to be 860 °C^{126,140}. The enthalpy of fusion quoted in Ref. 14 is 13 800 J mol⁻¹, but

three independent determinations, 8990 J mol⁻¹ ¹²⁶ was most consistent with all the binary phase diagrams containing Li₂SO₄ which were critically evaluated in the present work. The value of Dissanayake and Mellander¹²⁶ was therefore retained in this work.

5. Acknowledgements

Financial support from the American Ceramic Society is gratefully acknowledged. This work was performed as part of the "Phase Diagrams for Ceramists" project. Yves Dessureault thanks the Natural Sciences and engineering Research Council of Canada for a fellowship.

6. References

- ¹J. Sangster and A. D. Pelton, J. Phys. Chem Ref. Data 16, 509 (1987).
 ²N. K. Voskrensenskaya, ed., Handbook of Solid-liquid Equilibria in Systems of Anhydrous Inorganic Salts, TT69-550791. AEC-TR-69831, UC-4 (Atomic Energy Commission and National Science Foundation, Washington, 1970), vol. 1.
- ³G. J. Janz, C. B. Allen, J. R. Downey and R. P. T. Tomkins, *Physical Properties Data Compilations Relevant to Energy Storage*. 1. Molten Salts: Eutectic Data, NSRDS-NBS 61, Part 1 (U.S. Dept. of Commerce, Washington, 1978).
- ⁴J. Wisniak, *Phase Diagrams: A Literature Source Book* (Elsevier, New York, 1981), 2 vols.
- ⁵E. M. Levin, C. R. Robbins, H. F. McMurdie, R. S. Roth, T. Negas and L. P. Cook, *Phase Diagrams for Ceramists* (American Ceramic Society, Columbus, 1964–1983), 5 vols.
- ⁶C. W. Bale and A. D. Pelton, Met. Trans. 14B, 77 (1983).
- ⁷W. T. Thompson, C. W. Bale and A. D. Pelton, "F*A*C*T* (Facility for the Analysis of Chemical Thermodynamics) Users' Manual" (Programs FITBIN and POTCOMP) Ecole Polytechnique/McGill University, Montreal, 1985).
- ⁸A. D. Pelton, *Phase Diagrams* in "Physical Metallurgy," 3rd edition, ed. R. W. Cahn and P. Haasen (North Holland, New York, 1983, p. 328).
- ⁹I. Ansara, Internat. Met. Ref. 238(1), 20 (1979).
- ¹⁰P. J. Spencer and I. Barin, Mater. Eng. Appl. 1, 167 (1979).
- ¹¹A. D. Pelton and C. W. Bale, Thermodynamic Analysis of Ionic Systems at High Temperature, NACE Symposium on High Temperature Corrosion, National Association of Corrosion Engineers, San Diego, 1981
- ¹²C. W. Bale and A. D. Pelton, CALPHAD Journal 6, 255 (1982).
- ¹³P. L. Lin, A. D. Pelton and C. W. Bale, J. Am. Ceram. Soc. **62**, 414 (1979)
- ¹⁴I. Barin, O. Knacke and O. Kubaschewski, *Thermochemical Properties of Inorganic Substances* (Springler-Verlag, Berlin, 1977).
- ¹⁶O. Schmitz-Dumont and I. Heckmann, Z. anorg. alig. Chem. 260, 49 (1949).
- ¹⁶Unpublished diagram, Metalloy Corp. Minneapolis, Minn. (1945). Reported by: E. M. Levin, C. R. Robbins and H. F. McMurdie eds., *Phase Diagrams for Ceramists* (American Ceramic Society, Columbus, 1964), Fig. 1826.
- ¹⁷N. N. Volkov and T. F. Shvab. Izv. Fiz. Khim. Nauch.-Issled. Inst. Irkutsk. Gosud. Univ., 2, 51 (1953).
- ¹⁸M. Amadori, Atti Real. Acad. Lincei Sez. II, 22(5), 366 (1913).
- ¹⁹K. E. Manoilov and M. N. Smirnov, Tr. Vses.-magn. Inst. (VAMI), 22, 98 (1940).
- ²⁰N. N. Volkov and A. G. Bergman, Compt. Rend. Acad. Sci. URSS, 35, 47 (1942).
- ²¹N. N. Volkov and A. G. Bergman, Compt. Rend. Acad. Sci. URSS, 27, 967 (1940)
- ²²A. G. Bergman and V. V. Rubleva, Zh. Neorg. Khim. 2, 1609 (1957).

- ²³E. I. Speranskaya and A. G. Bergman, Izv. Sekt. Fiz. Khim. Anal., 26, 189 (1955).
- ²⁴A. I. Kislova, V. I. Posypaiko and A. G. Bergman, Zh. Fiz. Khim. 29, 359 (1955).
- ²⁵O. J. Kleppa and S. Julsrud, Acta Chem. Scand. A34, 655 (1980).
- ²⁶A. G. Bergman and V. V. Rubleva, Zh. Neorg. Khim. 4, 141 (1959).
- ²⁷A. Wolters, Neues Jahrb. Mineral., Geol., Palaontol, Beil., 30, 64 (1910).
- ²⁸S. Mukimov, Izv. Sekt. Fiz. Khim. Anal. Inst. Obshch. Neorg. Khim. Akad-Nauk SSSR, 12, 19 (1940).
- ²⁹R. F. Rea, J. Am. Ceram. Soc. 21, 98 (1938).
- ³⁰V. A. Gladushchenko and A. G. Bergman, Zh. Neorg. Khim. 25, 1656 (1958).
- ³¹V. A. Gladushchenko and A. G. Bergman, Zh. Neorg. Khim. 3, 1653 (1958).
- ³²I. Kostenska and M. Malinovsky, Chem. Zvesti 36, 159 (1982).
- ³³G. Hatem, M. Gaune-Escard and A. D. Pelton, J. Phys. Chem. 86, 3039 (1982).
- ³⁴B. Karandeef, Zentr. Mineral. Geol. 728 (1909).
- ³⁵V. A. Gladushchenko and A. G. Bergman, J. Gen. Chem. USSR, 26, 359 (1956).
- ³⁶N. A. Reshetnikov and G. G. Diogenov, Izv. Fiz. Khim. Nauch.-Issled. Inst. Irkutsk. Gosud. Univ., 2, 14 (1953).
- ³⁷Unpublished Diagram, Metalloy Corp., Minneapolis, Minn. (1944).
 Reported by: E. M. Levin, C. R. Robbins and H. F. McMurdie, eds.,
 Phase Diagrams for Ceramists (American Ceramic Society, Columbus, 1964), Fig. 1819.
- ³⁸O. Sackur, Z. Phys. Chem. 78, 550 (1912).
- ³⁹A. G. Bergman and A. K. Sementsova, Zh. Neorg, Khim. 3, 383 (1958).
- ⁴⁰Le Chatelier, Compt. Rend. 118, 709 (1894).
- ⁴¹O. Sackur, Z. Elektrochem. angew. phys. Chem. 16, 649 (1910).
- ⁴²P. Niggli, Z. anorg. allg. Chem. 106, 126 (1919).
- ⁴³T. Sato and J. Sunami, Tech. Repts. Imp. Univ. Tohoku, **11**, 403 (1934). (Chemical Abstracts, 29, 1313).
- ⁴⁴I. N. Belyaev and M. L. Sholokhovich, Sb. Obshch. Khim. 1, 134 (1953).
- ⁴⁵E. Ryschkewitsch, Z. Elektrochem. 39, 531 (1933).
- ⁴⁶H. Brearley and F. C. Morwood, Landolt-Bornstein Phys. Chem. Tabl. H. W., 1, 607 (1923).
- ⁴⁷V. P. Radischchev, Zh. Obshch. Khim. 3, 852 (1933).
- ⁴⁸A. G. Bergman and A. K. Sementsova, Zh. Neorg. Khim. 3, 201 (1958).
- ⁴⁹E. Kordes, Z. anorg. allg. Chem. 167, 97 (1927).
- ⁵⁰M. N. Zakhavalinskii, V. G. Romanovskaya, V. F. Tkachenko and N. A. Finkel'shtein, Russ. J. Inorg. Chem. 16, 1753 (1971).
- E. K. Akopov and A. G. Bergman, Zh. Neorg. Khim. 2, 385 (1957).
 E. K. Akopov and A. G. Bergman, Dokl. Akad. Nauk SSSR, 102, 82
- 53M. S. Golubeva and B. S. Medvedev, Russ. J. Inorg. Chem. 7, 1351
- ⁵⁴E. K. Akopov and Z. G. Moiseenko, Russ. J. Inorg. Chem. 20, 283
- 55M. S. Golubeva and A. G. Bergman, Zh. Obshch. Khim. 24, 1940 (1954).
- ⁵⁶A. G. Bergman and M. L. Sholokhovich, Zh. Obshch. Khim. 25, 456 (1955).
- ⁵⁷N. N. Evseeva and A. G. Bergman, Zh. Obshch. Khim. 21, 1763 (1951).
- ⁵⁸A. G. Bergman and E. K. Akopov, Izv. Sekt. Fiz.-Khim. 23, 1763 (1951).
- ⁵⁹A. G. Bergman, A. I. Kislova and V. I. Posypaiko, J. Gen. Chem. USSR, 24, 1899 (1954).
- 60E. P. Dergunov, Zh. Fiz. Khim. 25, 584 (1951).
- ⁶¹D. S. Lesnykh and A. G. Bergman, Zh. Obshch. Khim. 23, 894 (1953).
- ⁶²E. K. Akopov and E. I. Korobka, Russ. J. Inorg. Chem. 13, 1194 (1968).
- ⁶³M. A. Klochko, Zh. Obshch. Khim. 3, 1026 (1933).
- 64N. P. Luzhnaya, Tr. Inst. Prikl. Khim. No. 23, 34 (1935).

- 65E. Janecke, Z. phys. Chem. 64, 343 (1908).
- 66E. I. Speranskaya, Izv. Akad. Nauk SSSR, Ser. Khim. 463 (1938).
- ⁶⁷A. P. Palkin, Tr. Voron. Gosud. Univ., 17, 3 (1950).
- ⁶⁸N. N. Evseeva and A. G. Bergman, Izv. Sekt. Fiz. Khim. Anal. 21, 208 (1952).
- ⁶⁹G. I. Nagornyi and T. D. Zimina, Izv. Fiz. Khim. Nauch.-Issled. Inst. Irkutsk. Gosud. Univ., 2, 31 (1953).
- ⁷⁰E. K. Akopov and A. G. Bergman, Zh. Obshch. Khim. 24, 1524 (1954).
- ⁷¹A. G. Bergman and G. L. Bakumskaya, Zh. Obshch-Khim. 25, 2405 (1955).
- ⁷²A. G. Bergman, T. D. Zimina and G. I. Nagornyi, Izv Vyssh. Uchebn. Zaved. Khim. Tekhnol. 8, 870 (1965).
- ⁷³P. I. Fedorov and K. A. Bol'shakov, Zh. Neorg. Khim. **4**, 893 (1959).
- ⁷⁴J. Gabcova and M. Malinovsky, Chem. Papers, 40, 201 (1986).
- ⁷⁵J. Bye and J. Holder, Bull. Soc. Chim. Fr. 399 (1953).
- ⁷⁶O. S. Dombrovskaya, Zh. Obshch. Khim. 3, 1019 (1933).
- ⁷⁷E. Janecke and W. Muhlhauser, Z. anorg. allg. Chem. **228**, 241 (1936).
- ⁷⁸A. K. Sementsova and A. G. Bergman, Zh. Obshch. Khim. 26, 1129 (1956).
- ⁷⁹E. M. Levin, C. R. Robbins and H. F. McMurdie, eds., *Phase Diagrams for Ceramists* (American Ceramic Society, Columbus, 1964 and 1969) a) Fig. 1772; b) Fig. 3834.
- 80R. Cohen Adad, M. Michaud, J. Said and A. P. Rollet, Bull. Soc. Chim. Fr. 356 (1961).
- ⁸¹O. G. Perfil'eva and N. A. Reshetnikov, Russ. J. Inorg. Chem. 9, 1406 (1964).
- ⁸²N. A. Reshetnikov and O. G. Perfil'eva, Russ. J. Inorg. Chem. 13, 870 (1968).
- ⁸³B. Neumann and E. Bergve, Z. Elektrochem. angew. phys. Chem. 20, 271 (1914).
- 84R. P. Seward, J. Am. Chem. Soc. 64, 1053 (1942).
- 85V. A. Khitrov, Izv. Sekt. Fiz. Khim. Anal. 25, 236 (1954).
- ⁸⁶R. P. Seward, J. Am. Chem. Soc. 77, 5507 (1955).
- ⁸⁷M. Rolin and J. Racapet, Bull. Soc. Chim. Fr. 2110 (1964).
- ⁸⁸M. F. Lantratov and A. F. Alabyshev, Zh. Prikl. Khim. 32, 65 (1959).
- ⁸⁹M. Michaud, Rev. Chim. Mineral. 5, 89 (1968).
- R. P. Seward and K. E. Martin, J. Am. Chem. Soc. 71, 3564 (1949).
 N. A. Reshetnikov and G. G. Diogenov, Dokl. Akad. Nauk SSSR, 85, 819 (1952).
- ⁹²N. A. Reshetnikov and N. I. Vilutis, Nauch. Tr. Irkutsk. Med. Inst. No. 95, 152 (1969).
- ⁹³A. G. Bergman and V. A. Khitrov, Izv. Sekt. Fiz. Khim. Anal. 21, 207 (1952).
- ⁹⁴M. V. Smirnov and L. N. Strelnikova, Sb. Nauch. Tr. Gosud. Nauch.-Issled. Inst. Tsvetn. Metal. No. 23, 67 (1965).
- ⁹⁵V. A. Khitrov and N. N. Khitrova, Dokl. Akad. Nauk SSSR, 88, 853 (1953).
- ⁹⁶M. I. Ravich and V. M. Elenevskaya, Izv. Sekt. Fiz. Khim. Anal. 25, 176 (1954).
- ⁹⁷S. Andersson, Chem. Scr. 20, 164 (1982).
- 98M. Amadori, Atti Real. Accad. Lincei, Sez. II, 22, 332 (1913).
- ⁹⁹G. A. Bukhalova, M. L. Sholokhovich and A. G. Bergman, Dokl. Akad. Nauk SSSR, 71, 287 (1953).
- ¹⁰⁰N. N. Volkov and M. N. Zakhvalinskii, Izv. Fiz. Khim. Nauch.-Issled. Inst. Irkutsk. Gosud. Univ., 2, 72 (1953).
- ¹⁰¹P. Perman and W. R. Harrison, J. Chem. Soc. **125**, 364 (1924).
- ¹⁰²A. G. Bergman and N. M. Vaksberg, Izv. Akad. Nauk SSSR, Ser. Khim. 1, 71 (1937).
- ¹⁰³O. J. Kleppa and S. V. Meschel, J. Phys. Chem. 67, 2750 (1963).
- ¹⁰⁴A. P. Rostovskii, Izv. Sekt. Fiz. Khim. Anal. 12, 58 (1940).
- ¹⁰⁵E. P. Perman and W. J. Howells, J. Chem. Soc. 123, 2132 (1923).
- ¹⁰⁶E. I. Kuz'mina, Tr. Inst. Prikl. Khim. No. 23, 63 (1935).
- ¹⁰⁷F. Guthrie, Phil. Mag. and J. Science 17, 462 (1884).
- ¹⁰⁸E. Rapoport, J. Phys. Chem. Solids 27, 1349 (1966).
- ¹⁰⁹O. J. Kleppa and F. G. McCarty, J. Chem. Eng. Data 8, 331, (1963).
- ¹¹⁰E. Schurmann and L. Nedeljkovic, Ber. Bunsenges. Phys. Chem. 74, 462 (1970).
- 111 C. Sinistri and P. Franzosini, Ric. Sci. Rend. Sez. A, 3, 419 (1963).

- 112H. M. Goodwin and T. H. Kalmus, Phys. Rev. 28, 1 (1909).
- 113L. E. Gastwirt and E. F. Johnson, AEC Report MATT-98, Princeton (1961).
- 114P. Nguyen-Duy and E. A. Dancy, Thermochimica Acta, 39, 95 (1980).
- ¹¹⁵R. W. Carling, Thermochimica Acta 60, 265 (1983).
- 116K. Ichikawa and T. Matsumoto, Proc. First Int. Symp. Molten Salt Technol. Kyoto, 1985, p. 485.
- ¹¹⁷G. J. Janz, F. J. Kelly and J. L. Perano, J. Chem. Eng. Data 9, 133
- 118 A. Mustajoki, Ann. Acad. Sci. Fenn. Ser. A, VI, No. 5, (1957).
- ¹¹⁹M. G. Lowings, K. G. McCurdy and L. G. Hepler, Thermochimica Acta 23, 365 (1978).

 120K.-H. Breuer and W. Eysel, Thermochimica Acta 57, 317 (1982).
- 121 V. A. Sokolov and N. E. Schmidt, Izv. Sekt. Fiz. Khim. Anal. Inst., 26, 123 (1955).
- ¹²²E. R. Van Artsdalen, J. Phys. Chem. 60, 172 (1956).
- ¹²³K. K. Kelley, U.S. Bureau of Mines Bulletin No. 584 (1960).
- ¹²⁴A. Reisman, J. Am. Chem. Soc. 80, 3558 (1958).
- ¹²⁵G. J. Janz, E. Neuenschwander and F. J. Kelly, Trans. Far. Soc. 59, 841 (1963).
- 126M. A. K. L. Dissanayake and B.-E. Mellander, Solid State Ionics 21,
- 127 A. Reisman, F. Holtzberg and E. Banks, J. Am. Chem. Soc. 80, 37

- ¹²⁰G. J. Janz and J. L. Perano, Trans. Far. Soc. 60, 1/42 (1964).
- 129S. Z. Makarov and M. P. Shul'gina, Izv. Akad. Nauk SSSR, 5, 691, (1940).
- ¹³⁰A. Reisman, J. Am. Chem. Soc. 81, 807 (1959).
- ¹³¹J. Jaffray and P. Martin, Compt. Rend Acad. Sci. Paris, 236, 1755 (1953).
- ¹³²S. J. Schneider and E. M. Levin, J. Am. Ceram. Soc. 56, 218 (1973). ¹³³J. Jaffray and P. Martin, J. Phys. Rad. 14, 553 (1953).
- ¹³⁴C. N. R. Rao and K. J. Rao, Phase Transitions in Solids, McGraw-Hill, New York (1978).
- 135G. W. H. Hohne, K.-H Breuer and W. Eysel, Thermochimica Acta 69, 145 (1983).
- ¹³⁶K. Schroeder, A. Kvist and H. Ljungmark, Z. Naturforsch. A. 27, 1252 (1972).
- ¹³⁷K. Schroeder and C.-A. Sjoblom, High Temp.-High Press. 12, 327
- ¹³⁸C. W. F. T. Pistorius, J. Phys. Chem. Solids, 28, 1811 (1967). Fiz.·Khim. Anal. 25, 150 (1954).
- ¹³⁹N. K. Voskresenskaya and E. I. banashek, Izv. Sekt. Fiz. Khim. Anal. 25, 150 (1954).
- ¹⁴⁰K. Schroieder, Ph.D. Thesis, University of Goteborg, 1975.
- ¹⁴¹G. Hatem, Thermochimica Acta 88, 433 (1985).